



Retail Catalogue

L'arte di governare la luce.

COSA SAPPIAMO FARE MEGLIO

Consulenza, progettazione, produzione ed installazione di impianti illuminotecnici a Led. Studiamo per il cliente le forme ed i materiali più adatti affinché il nostro risultato sia esteticamente ottimale e adeguato al contesto in cui il progetto si inserisce.


LED DESIGN

Creiamo con professionalità e particolare attenzione all'efficienza luminosa, alla qualità della luce, alla resa cromatica ed alla perfetta funzionalità del prodotto. Creiamo con unicità dando vita a nuove forme di luce ed offrendo sempre il meglio di noi stessi.

SPECIALIZZATI IN

- . Progettazione e produzione di lampade a Led su misura;
- . Lampade per mobili ed arredi tra cui specchiere, vetrinette ed appendiabiti realizzati su progetto,
- . Illuminazione a Led per interni ed esterni;
- . Piscine e centri wellness con sistemi di cromoterapia RGB;
- . Luci tecniche per sale conferenza;
- . Luci di accento per elementi espositivi, vetrine.

CLASSE ENERGETICA

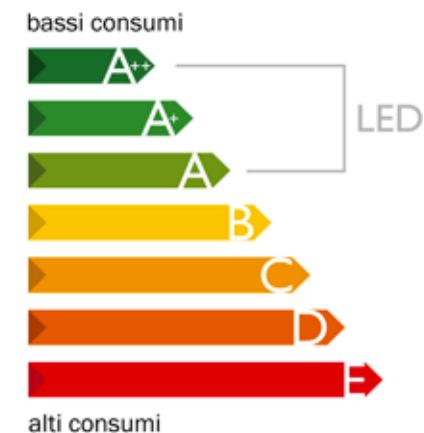

Siamo specializzati nella progettazione, consulenza e distribuzione di tutte le soluzioni di illuminazione a LED. Progettiamo sistemi illuminotecnici, adattando i prodotti in contesti di illuminazione commerciale, residenziale e pubblica con l'obiettivo di far convergere le esigenze estetico-architettoniche con quelle del rispetto ambientale e del risparmio energetico. Sviluppiamo, progettiamo e realizziamo soluzioni su misura per ogni esigenza del cliente. Forniamo installatori, negozi, professionisti e quanti operano nel settore. La nostra esperienza è al vostro servizio!

We develop, design and implement lighting systems for commercial, residential and public lighting with the aim of combining the esthetic and architectural requirements with the care of the environment and energy saving.

Nous sommes spécialisée dans la conception, le conseil et la distribution de toutes les solutions d'éclairage LED. Nous concevons des systèmes d'éclairage, nous adaptons les produits dans les secteurs commercial, résidentiel et public, afin d'unir les exigences esthétiques et architecturales avec celles de l'économie de l'environnement et de l'énergie.

INDICE

Pag. 8-32 > Sospensioni - Applique - Piantane

Pag. 35-58 > Specchiere - Vettrine - Accessori per cabine

Pag. 60-86 > Ufficio - Aree tecniche - Zone comuni

Pag. 88-96 > A scomparsa cartongesso - Invisibili

Pag. 98-106 > Strip - Schede - Moduli

Pag. 108-184 > Profili per mobili - Cartongessi - Sospensioni

Pag. 186-187 > Wellness

Pag. 189-203 > Musei - Architettura Sacra

Pag. 206-226 > Esterni

Pag. 228-237 > Industria - Stradale


Pag. 238-240 > Gamma colori

Pag. 241-244 > Note

LA NOSTRA
PASSIONE
SI RIFLETTE NEI NOSTRI
PROGETTI



Sospensioni - applique
piantane

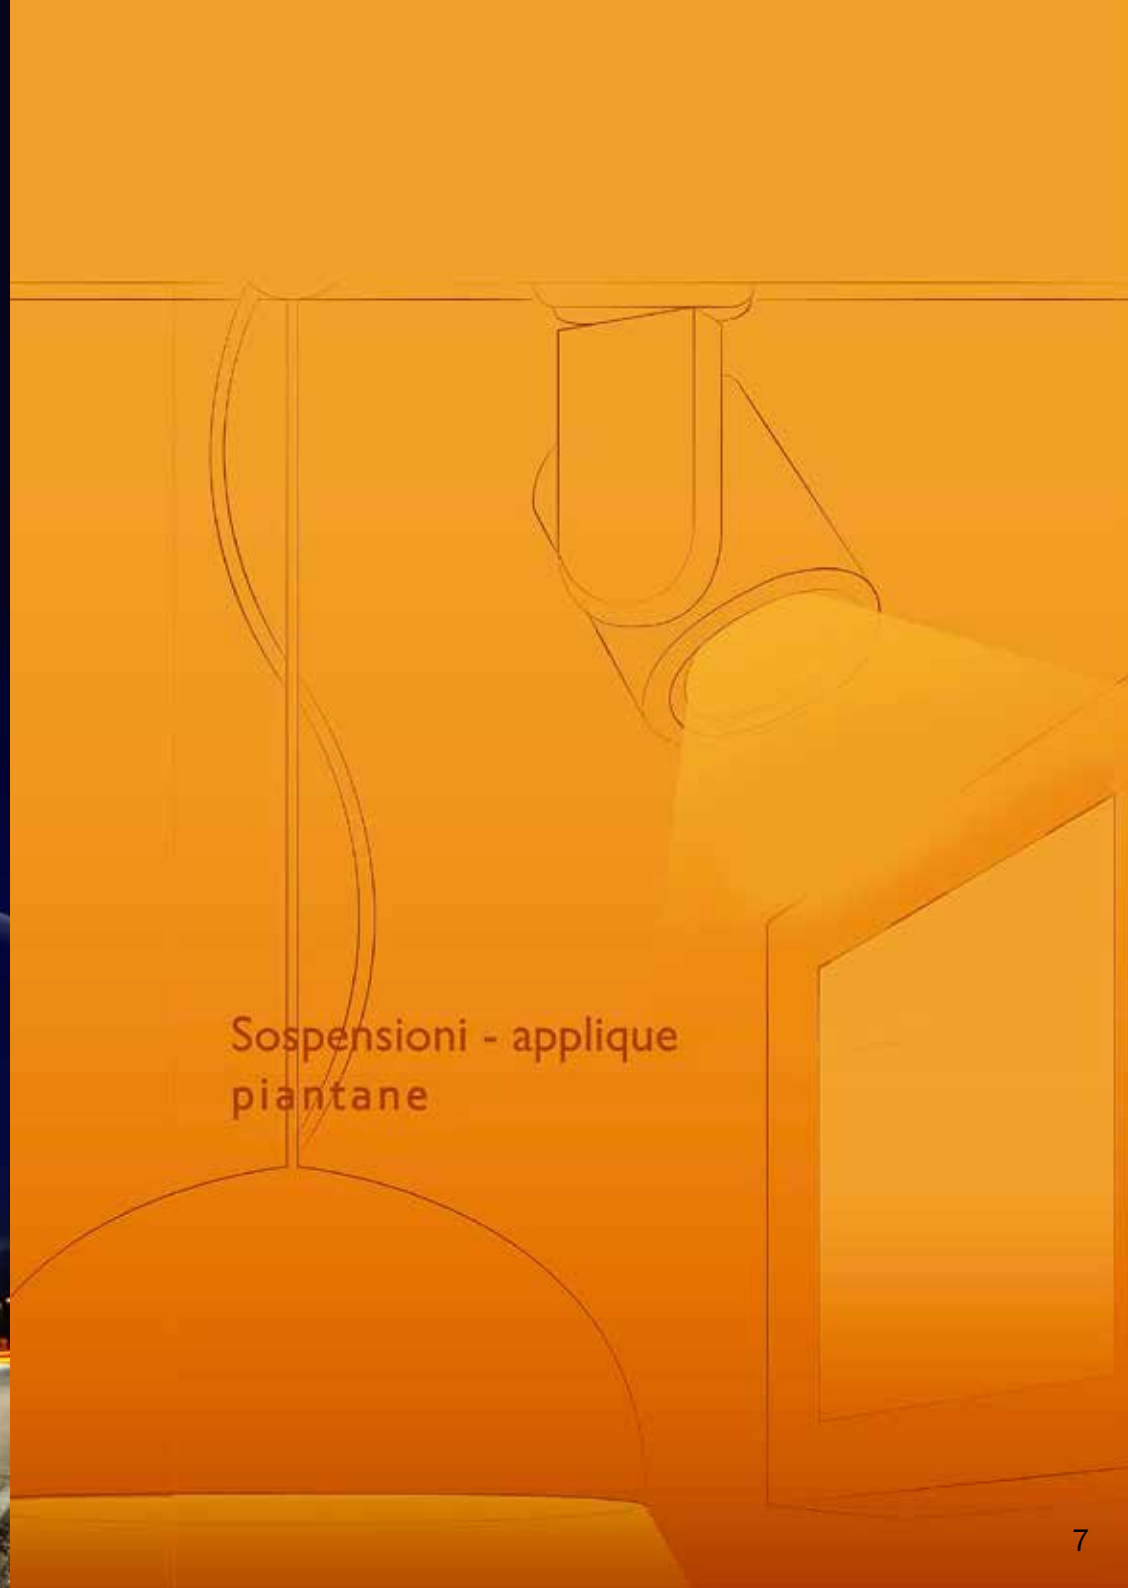


PENDENT P12

14P12.2
14P12.3




P12-2

Model	P12-2
LED	CREE 1507 1 PCS
Beam Angle	24°
LED Power	11 W
Foat. Current	280 mA
Foat. Voltage	39 V
CRI	≥ 80



P12-3

Model	P12-3
LED	CREE 1507 1 PCS
Beam Angle	24°
LED Power	11 W
Foat. Current	280 mA
Foat. Voltage	39 V
CRI	≥ 80




HIGH BAY

14P4.1
14P4.2




P4-1

Model	P4-1 / P4-2
LED	CREE 2530 1 PCS
Beam Angle	80°
LED Power	34 W
Foat. Current	900 mA
Foat. Voltage	38 V
CRI	≥ 80



P4-1



P4-2


HOLLA

141284-W
141284-C

Colori disponibili: (W) (C)



DATI TECNICI

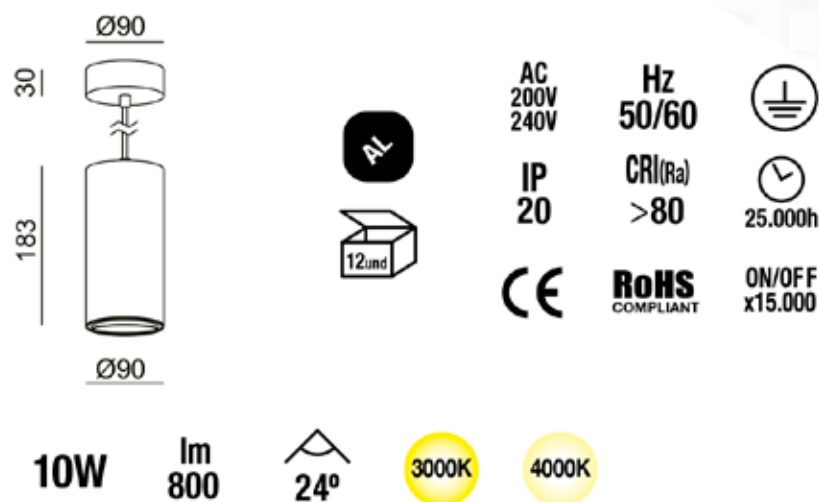


HOLLALARGE

141285-W
141285-C
141285-BK

Colori disponibili: (W) (C) (B)



DATI TECNICI

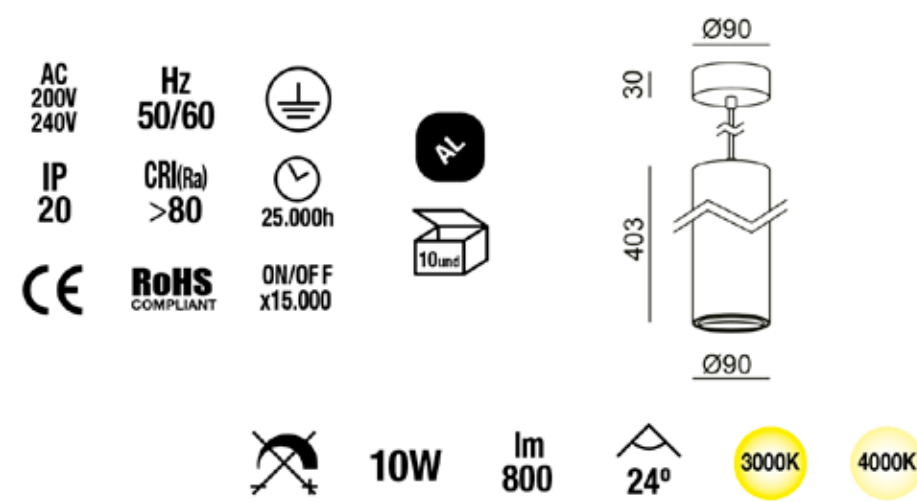

DRUPAL_S

14DP51160
14DP51170

DRUPAL_P

14DDC53196




Drupal_s

Drupal_s

Drupal_s


14DP51160_01



14W - 100/240V - 350mA



14W - 100/240V - 350mA



14W - 100/240V - 350mA




Drupal_s




Drupal_s

14DP51170_01



27W - 220/240V - 700mA



27W - 220/240V - 700mA




DRUPAL Drupal_s

Spotlight realizzato in alluminio pressofuso e verniciato a polvere. Copertura in policarbonato satinato per fornire una fonte di luce uniforme e cavo in teflon.

Option DP51170
Color temperature control.
32W - 2700/5000K -
dimmable driver.

DATI TECNICI

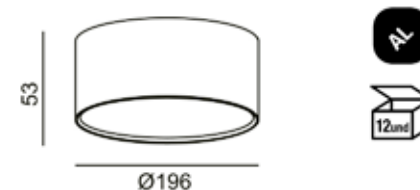

AC
200V
240V

Hz
50/60



IP
20

CRI(Ra)
>80

25.000h



RoHS
COMPLIANT

ON/OFF
x15.000



23W

lm
1840



120°

3000K

4000K

DRUPAL_B-wall bracket

14DDC65130.02

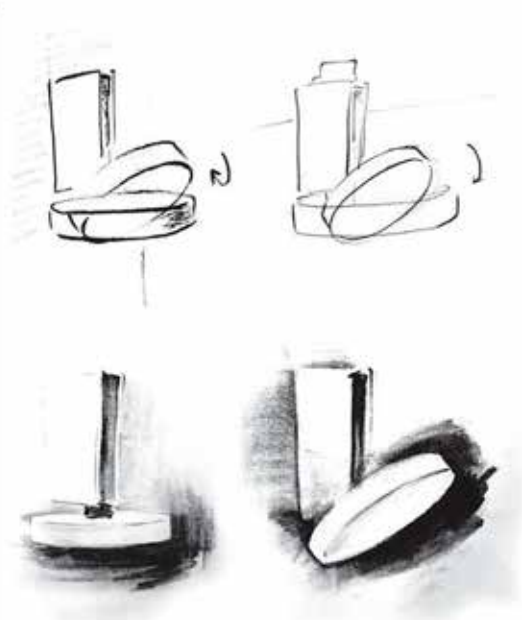

Drupal_b



14DDC65130.02



DRUPAL

Drupal_b-wall bracket

Spotlight realizzato in alluminio pressofuso e verniciato a polvere. Copertura in policarbonato satinato per fornire una fonte di luce uniforme.

Option:
Color temperature control,
32W - 2700/5000K -
dimmable driver.


DRUPAL

141464-W 7W

141465-W 9W



DATI TECNICI



AC
200V
240V

Hz
50/60



IP
20

CRI(Ra)
>80

25.000h



RoHS
COMPLIANT

ON/OFF
x15.000




7W

lm
530

120°

3000K

4000K



AC
200V
240V

Hz
50/60



IP
20

CRI(Ra)
>80

25.000h



RoHS
COMPLIANT

ON/OFF
x15.000



9W

lm
700

120°

3000K

4000K

DOWN LIGHTS

14C30.1
14C30.2
14C30.3



585 lumen



945 lumen



1620 lumen


LED	AC LED 1 PCS
Beam Angle	50°
Input Power	6.5 W
Input Voltage	120V / 220 V
CRI	≥ 80
Finish	Matt White



LED	AC LED 1 PCS
Beam Angle	50°
Input Power	10.5 W
Input Voltage	120V / 220 V
CRI	≥ 80
Finish	Matt White



LED	AC LED 1 PCS
Beam Angle	50°
Input Power	18 W
Input Voltage	120V / 220 V
CRI	≥ 80
Finish	Matt White



BIPOLAR

141298-W
141298-C

Colori disponibili: (W) (C)



DATI TECNICI

AC
200V
240V

Hz
50/60



IP
20

CRI(Ra)
>80

25.000h



RoHS
COMPLIANT

ON
x1!




10W

lm
800

23°

3000K



MIND ADJ


141800-W
141800-BK
141800-C
141800-R

Colori disponibili: (W) (B) (C) (R)



DATI TECNICI

Dimensioni: Ø63 x 158mm
Ø25mm
Lampada: Gu10 Max 50W
Materiali: Alluminio
IP20

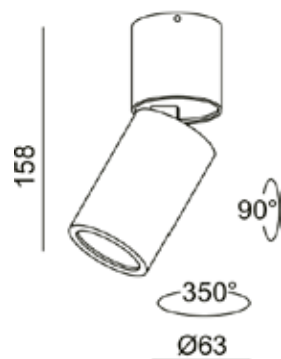



MIND

1464RF-W
1464RF-BK

Colori disponibili: (W) (B)



DATI TECNICI




COLUMBO ADJ

141329-C
141329-R
141329-W

Colori disponibili: (C) (R) (W)



DATI TECNICI

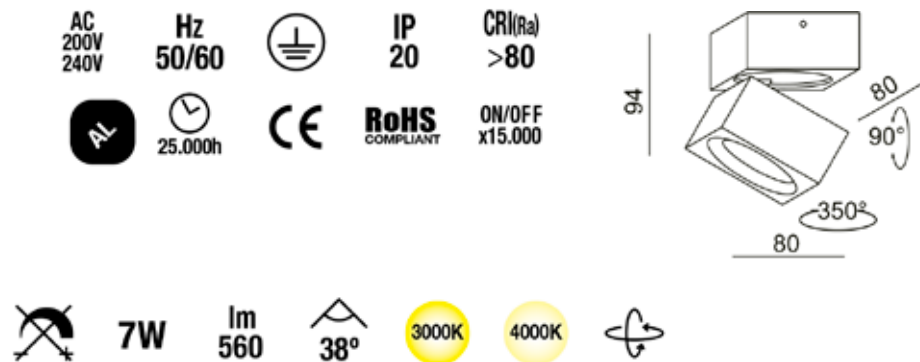


COLUMBO ORIENT

14QS95-W
14QS95-BK
14QS95-C

Colori disponibili: (W) (B) (C)



DATI TECNICI

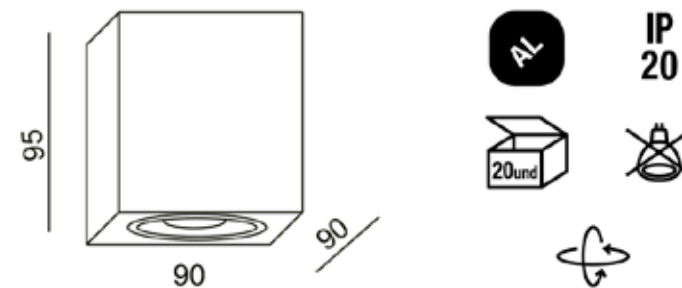


CUBE


14400AS
14400B



14400AS Alluminio satinato

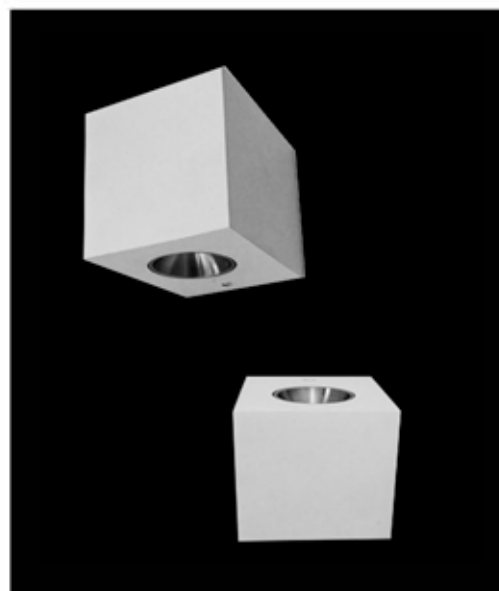

14400B Bianco



Fascio luminoso 120°



Fascio luminoso 120°

Applique da parete in metallo con particolare illuminazione a fascio sulla parete. Struttura e finitura in alluminio. Lampadine e trasformatore inclusi.

Luce calda 3000K - 240 Lm tot.


lamp. led
watt 2x3W 220-240V
IP20
CLASSE ENER. A+

LAM_W

1470106.001
1470106.002



02 09
○ ●

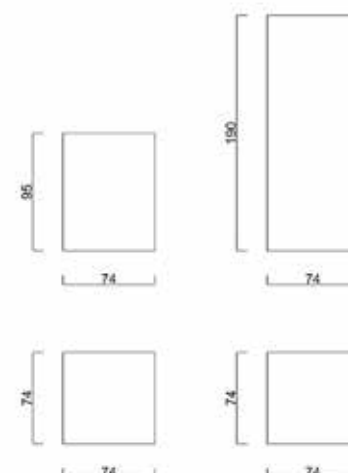

Lam_W1 Monoemissione

1470106.001.02 ○ 1x50W - GU10 L. 74 - H. 95 - S. 74

1470106.001.09 ● 1x50W - GU10 L. 74 - H. 95 - S. 74




Lam_W2 Biemissione

1470106.002.02 ○ 2x50W - GU10 L. 74 - H. 190 - S. 74

1470106.002.09 ● 2x50W - GU10 L. 74 - H. 190 - S. 74



LAM_W

Lampade da parete in alluminio nickelato o verniciato. Disponibile in versione monoemissione (W1) o biemissione (W2).



SLIM30

14201526.1
14201526.2

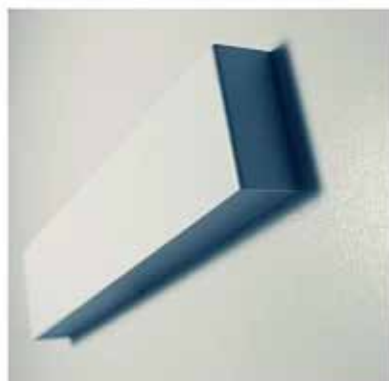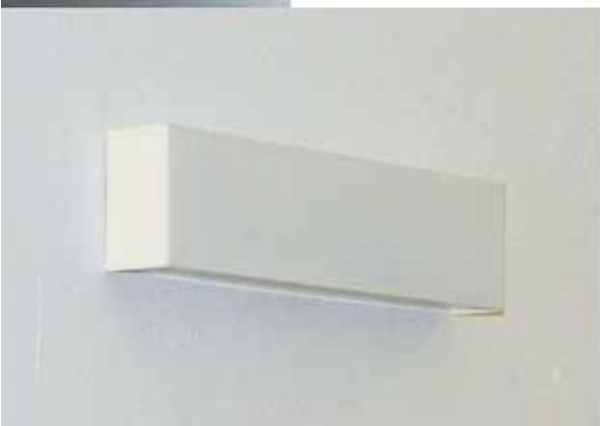

CE F IP20 ES

14201526.1.01
14201526.1.02
14201526.1.03
14201526.2.01
14201526.2.02
14201526.2.03



SLIM

Applique ultrapiatta da parete a luce indiretta in metallo verniciato a polvere (bianco, nero opaco) o in legno. Lente in policarbonato bianco panna. Cover con calamita.

New

SI CONSIGLIA COMANDO PULITO AD IMPULSI

14201526.1	Mono emissione:	14201526.2	Doppia emissione:
	8W 220V 3000K IP20		16W 220V 3000K IP20
	Angolo: 90°		Angolo: 90°
	42 LED		96 LED
	880 Lumens LED		1760 Lumens LED



SLIM60

14201560.1
14201560.2



CE F IP20 ES

14201560.1.01
14201560.1.02
14201560.1.03
14201560.2.01
14201560.2.02
14201560.2.03



SLIM

Applique ultrapiatta da parete a luce indiretta in metallo verniciato a polvere (bianco, nero opaco).. Lente in policarbonato bianco panna. Cover con calamita.

New

SI CONSIGLIA COMANDO PULITO AD IMPULSI

14201560.1	Mono emissione:	14201560.2	Doppia emissione:
	16W 220V 3000K IP20		32W 220V 3000K IP20
	Angolo: 90°		Angolo: 90°
	96 LED		192 LED
	1760 Lumens LED		3520 Lumens LED


D: per ordinare ARCO nei colori
disponibili (bianco, nero,
alluminio anodizzato)
R: per ordinare ARCO su richiesta
nei colori RAL (a pag. 246-248)

ARCO


14ARCO23537D
14ARCO23537R



ARCO DISEGNO TECNICO

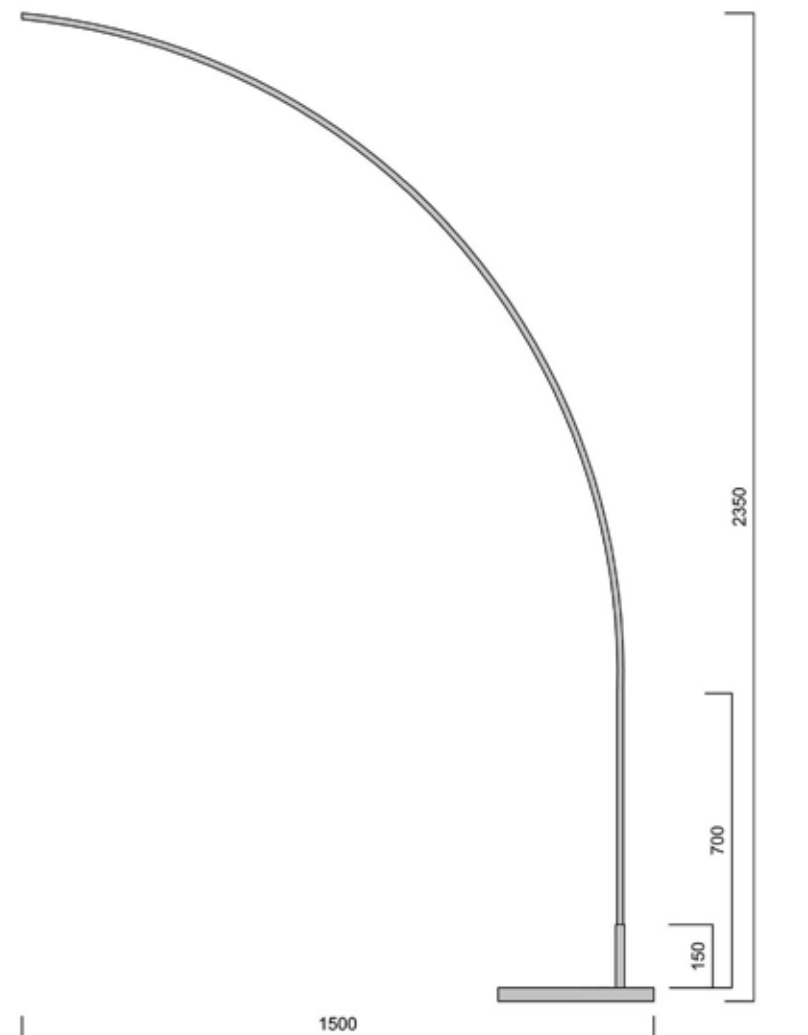

LED: 3000/4000 K°
Potenza: 34W
Alimentazione: 220-240V
Angolo: 90°
IP.20



D: per ordinare LISA nei colori
disponibili (bianco, nero,
alluminio anodizzato)
R: per ordinare LISA su richiesta
nei colori RAL (a pag. 246-248)


LISA

14LISA19037D
14LISA19037R
14LISA15037D
14LISA15037R
14LISA10537D
14LISA10537R



LISA DISEGNO TECNICO


LED: 3000/4000 K°
Potenza: 6W
Alimentazione: 220-240V
Angolo: 90°
IP: 20

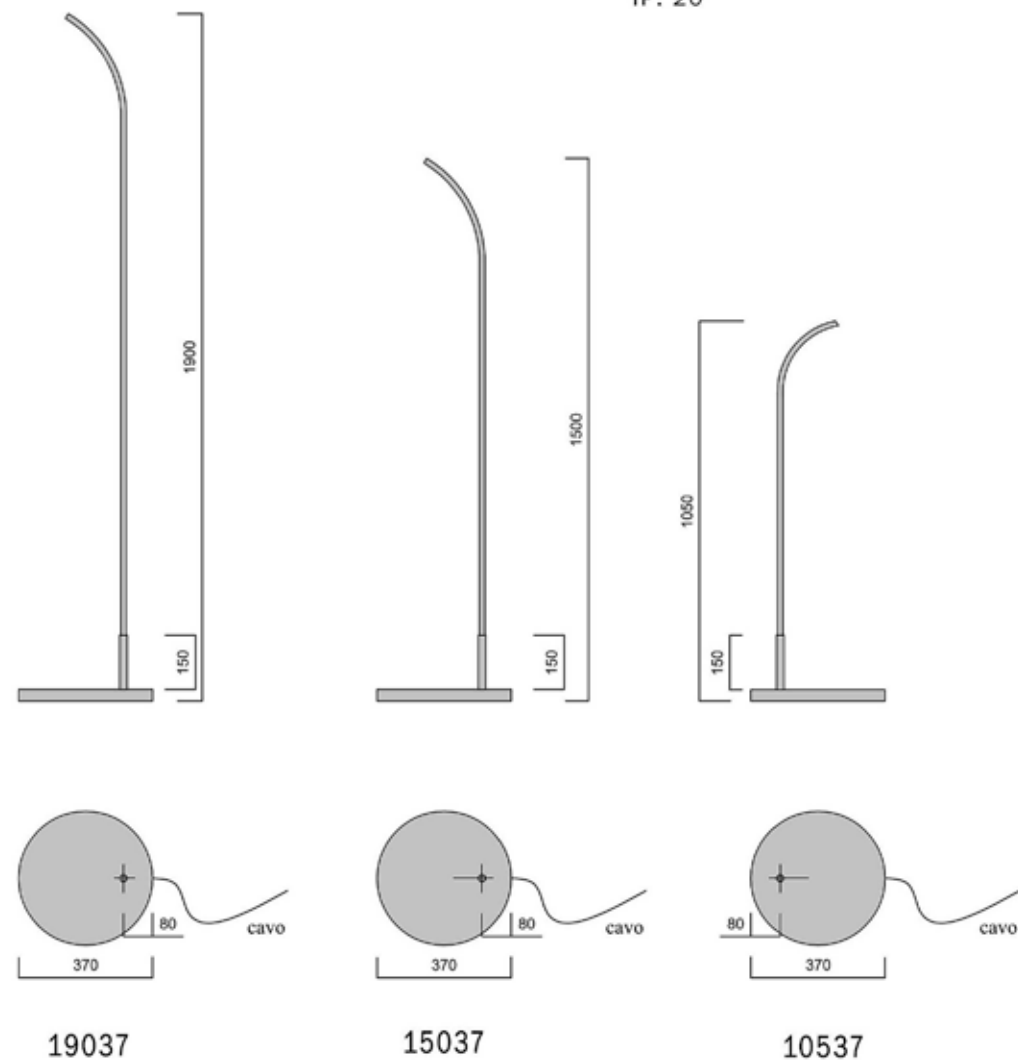




CUBO

14CUB01212

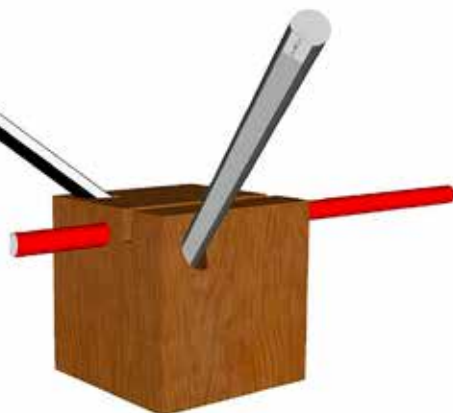


CUBO DISEGNO TECNICO


SVILUPPO

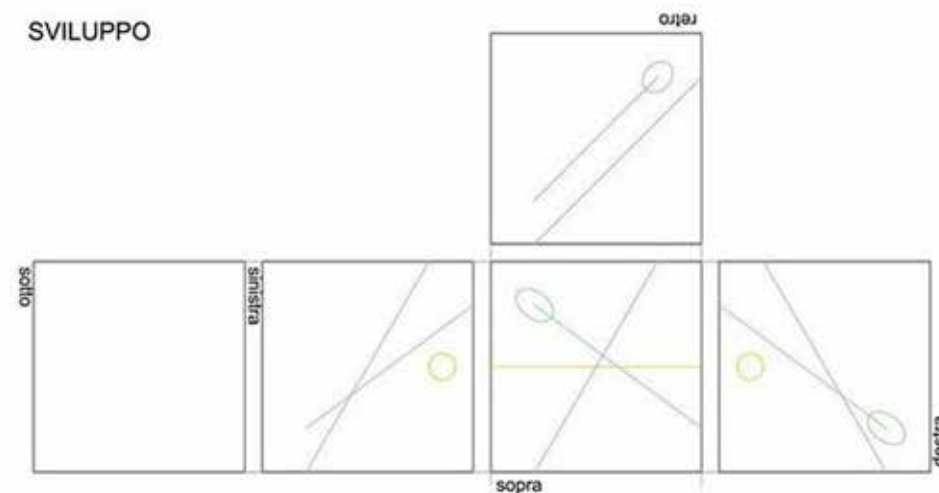

INCLINAZIONE nel piano del cilindro



Lunghezza cilindro: 60cm
LED: 3000/4000 K°
Potenza: 7,5W
Alimentazione: 220-240V
IP:20

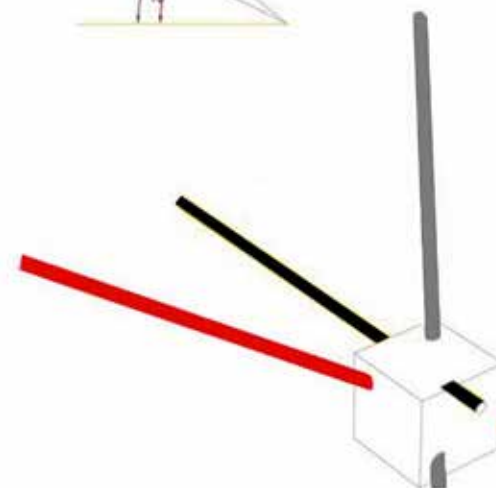


PROSPETTIVA

WRONG

14WNG15



Intensity of Light Output(lm)	7.200-7.900
Frequency(Hz)	50/60
Power Consumption(W)	60W
Power factor	>0.9
Dimmable Version:	0-10V
Expected Life(Std.)	50.000
Color Temperature(K)	3000K/4000K/6000K
CRI(Ra)	>80
Rating	IP 20
Dimension(mm)	1978*705*300
Material	Aluminium
Mass(Kg)	13Kg
Energy efficiency class	A++
Light distribution:	Direct / Indirect
Day and presence sensor	Optional
LED Efficiency	120 Lumen per Watt

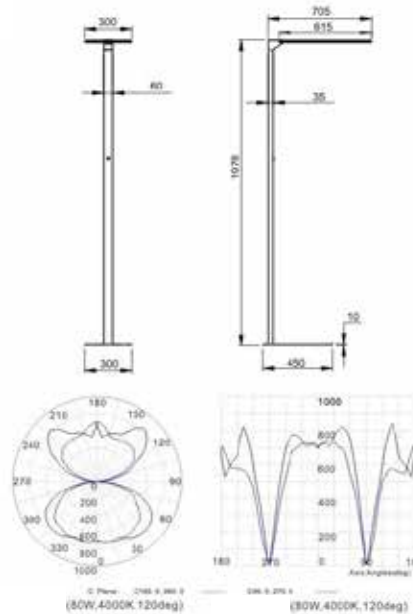

Specchiere - Vettrine -
Accessori per cabine




SPECCHIERE SU MISURA

SBAPL00212V

SLS080812V

120CM

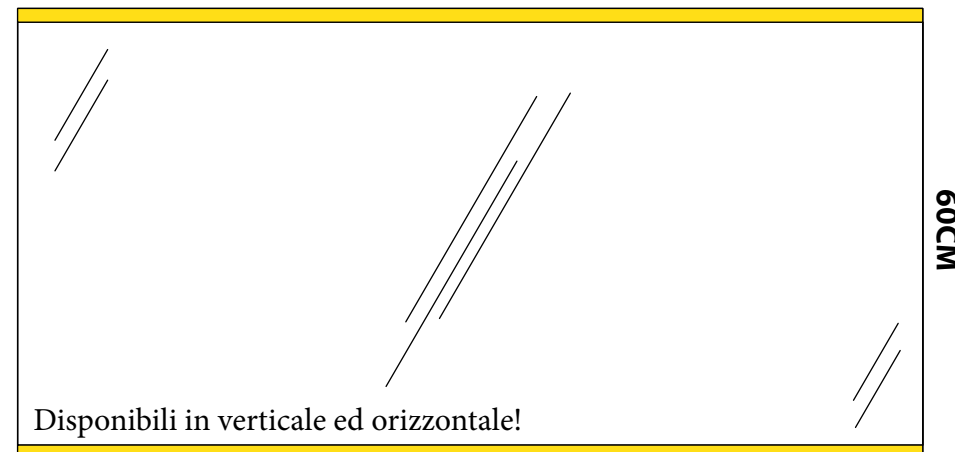

Dimensioni specchio: L.120 x A.60 x P.2,4cm

Peso: 10kg

Alimentazione: 100~240Vac 50/60Hz 12V


Luce primaria: 28,8W nominali

Tipo luce: 3000K/ **4000K**

Flusso luminoso: 3500 Lumens

CRI: >80

Grado di protezione: IP40



CODICE: SBAPL002



CODICE: SLS0808

SENSORE LETTO



24SL2017



DATI TECNICI

Potenza: 3W
Tipo luce: 3000K
Flusso luminoso: 200 Lumens
Range sensore: 100°

Distanza massima: 3.5m
Grado di protezione: IP65
Tempo di ritardo: 30sec-10min
Lunghezza strip: 1.5m

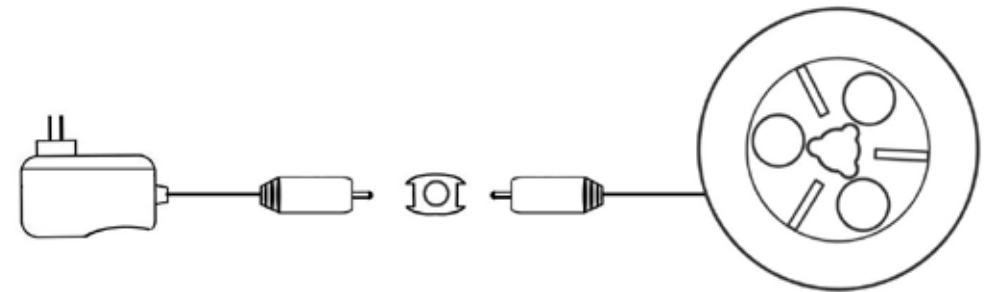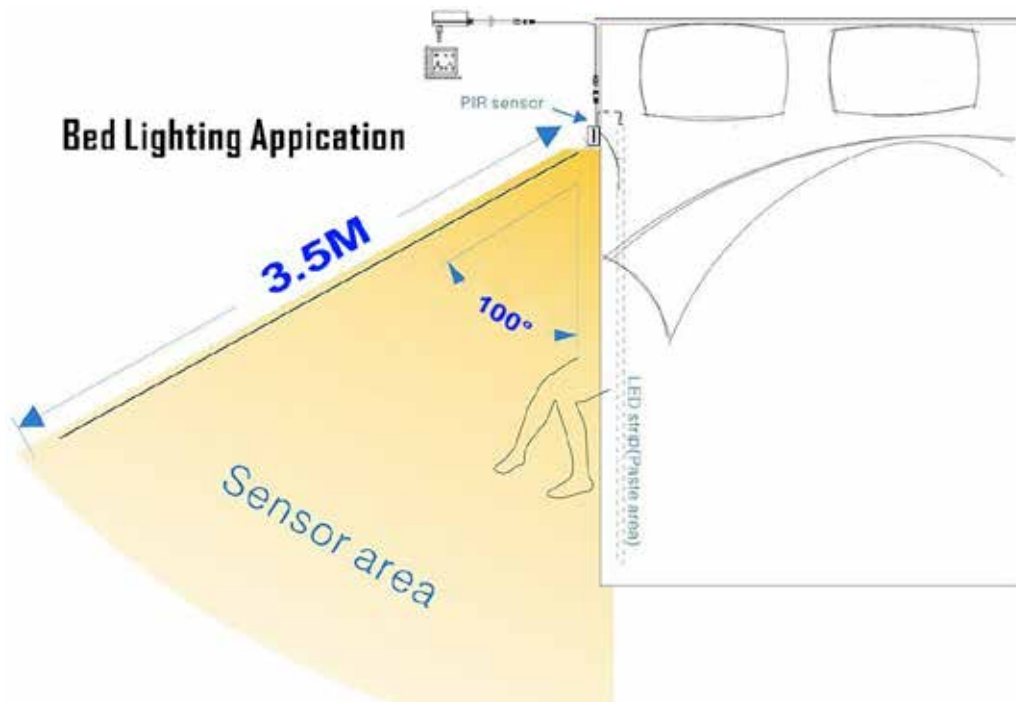

ALIMENTATORI CAT. F 12V

24DR06
24DR15
24DR35
24DR60



●Specification

Item NO	24DR06	24DR15	24DR35	24DR60
Power output	6W	15W	35W	60W
Input	100~240V,50~60HZ			
Output	DC12V	DC12V	DC12V	DC12V
Color	White			
Demension (LxWxHmm)	52x27x21.5mm	100x30x22mm	145x39x23mm	175x42x25
Used for lampsystem	The lead cable with connector and series distributor box use on below item : CB07/CB08/CB09/CB10/CB11/JS02/JS03/DP05/DP06/HS10/HS03-07/HG01/OC01			

●With the 3/6 way paralleling distributor box , can be add up to 2- 3/6 additional lights from one LED driver .

ALIMENTATORI 24V

24LRS100
24LRS150
24LRS300



24LRS100
100W 24V
220V
IP20



24LRS150
150W 24V
220V
IP20



24LRS300
300W 24V
220V
IP20

TESTIMONE 3/6 VIE

24DC12V




•Specification

Item NO	DB 1201	DB 1202	DB 1206	DB 1203
Description	JST female plug for DC 12V system	JST male socket for DC 12V system	JST 6 ways distributor box for DC12V system	JST 3 ways distributor box for DC12V system
Dimension	25x7x6mm	15x5x2.6mm	41.5x38x10mm	38x34.5x10mm
Application	The lead cable with connector and paralleling distributor box used on below item : CB07/CB08/CB09/CB10/CB11/DP02/DP03/HS03/SH04/HG01/OC01			



1. With the female and male DC12V connector system , can easy to connect the LED driver and LED lamps , and extending distance from the LED driver to LED lamps (the lead cable max 6M) .
2. With the 3/6 way paralleling distributor box , can be add up to 2- 3/6 additional lights from one LED driver .

•Applications drawing

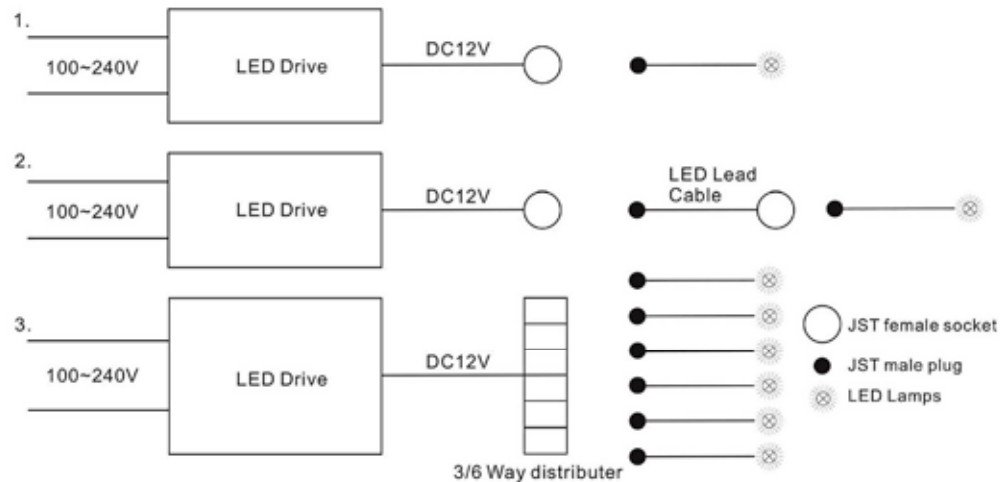


TOUCH DIMMABLE SWITCH

24DRE009

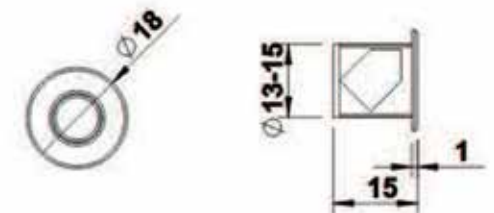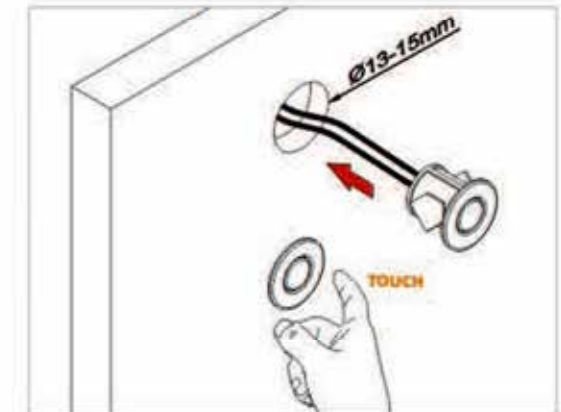

Touch dimmable switch.
Sensore touch dimmerabile.



TOUCH DIMMER SWITCHER

24TS01
24TS03

TS01




Recess Version
1.Size: $\varnothing 15\text{mm} \times \text{H.} 28\text{mm}$
2.Max:30W
Materiale: PVC bianco
Foro 12 mm

- Reacts to finger touch
- Quick touch(within 1 second) will turn on/off
- Continuously touch will dim the light smoothly
- With shallow blue indict light can be found even at night
- DC 12~24V input
Technical Operatic Characters $\text{TA}=25\text{C}^{\circ}$

● Applications

Wardrobes
Living Room Furniture
Kitchen Cabinets

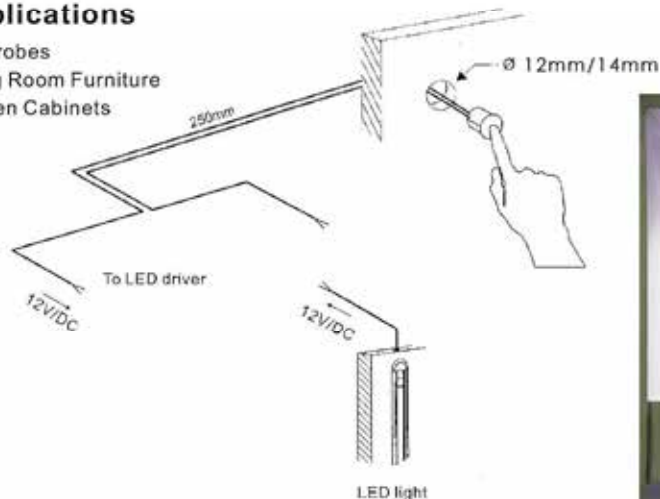

TS03



Recess Version
1.Size: $\varnothing 18\text{mm} \times \text{H.} 28\text{mm}$
2.Max:30W
Materiale: alluminio
Foro 14 mm



SENSOR SWITCH

24PR01

PR01



Recess Version

- 1.Sensor dimension $\varnothing 18\text{mm} \times \text{H} 12\text{mm}$
- 2.Control box size: $88\text{mm} \times 15\text{mm} \times 10\text{mm}$
- 3.Max:30W

- Reacts to the persence of persons and automatically switching on the light



- Keep 30 seconds light on

- Distance of react up to 2m

- DC 12~24V input
Technical Operatic Characters $\text{TA}=25\text{C}^{\circ}$

● Applications

Wardrobes
Living Room Furniture
Kitchen Cabinets

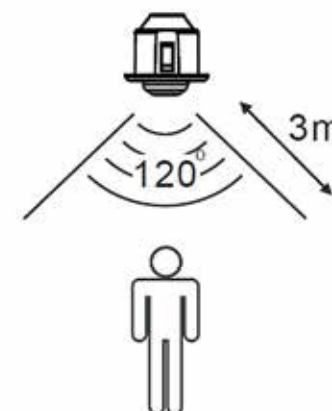

SENSOR SWITCH

24IH01
24ID01

IH01





Recess Version

1. Sensor dimension Ø15mm *H12mm
2. Control box size: 88mm*15mm*10mm
3. Max: 30W

- Activated by waving hand in front of the sensor to turn light on wave again to turn off
- Max activation points 80mm from sensors
- DC 12~24V input

Technical Operatic Characters TA=25C°



ID01




Recess Version

1. Sensor dimension Ø15mm *H12mm
2. Control box
3. Size: 88mm*15mm*10mm

- Motion of door operates switch
- Opening the door switches the light on and closing the door switches it off again
- Connection: DC12~24V
- Max Load: ID01/ID02 30W, ID03 60W
- Surface-mounted and recessed-mounted receiver are available
- Clearance between sensor and inside of the door can be up to 80mm

● Applications

Wardrobes
Living Room Furniture
Kitchen Cabinets




TOUCH SWITCH


24DRE008



Blue/white signal
in darkness

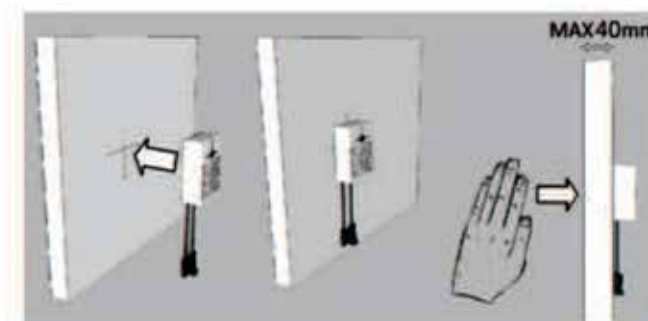

Wood range 30-40mm





New

Touch switch for **wood**.
Sensore touch per **legno**.



TOUCH SWITCH

24DRE007

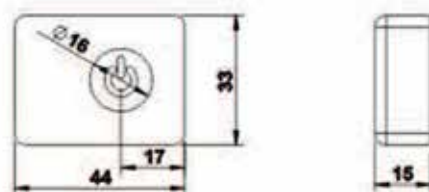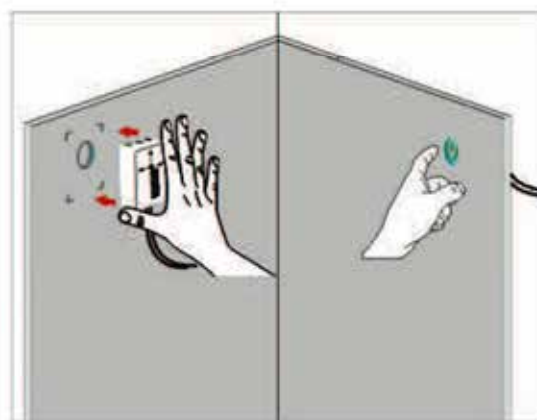

New

Touch switch for **mirror**.
Sensore touch per **specchi**.



OVER LIGHT

240C01



High quality aluminum anodized house

With high brightness PC Cover

Fix with bracket hold and surface mounted version

DC12V, different window and different wattage is available

Less heating, no UV, energy saving, long life

• Specification

LED Color	Input	Wattage per M	Lum per M	CRI
3000K	DC12V/100-240V	6W	70-100lum	≥80

If input AC100-240V, need to add external LED driver (DL1203 or DL1206)




• Accessory

LED driver, cable and connector, please refer page 54,56



• Applications

Suitable for using in decorative lighting, display and show case

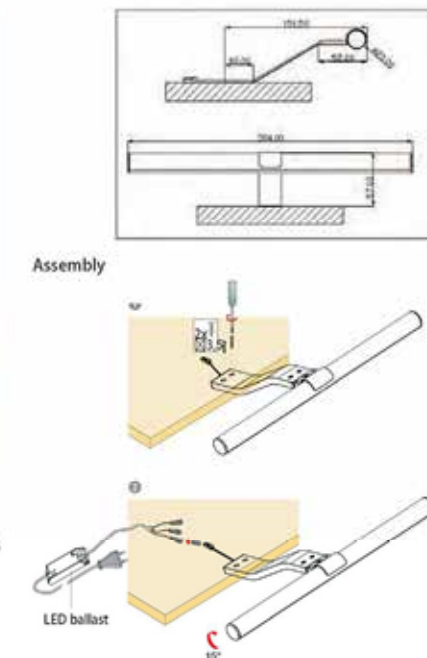

READING LIGHT

24RL01

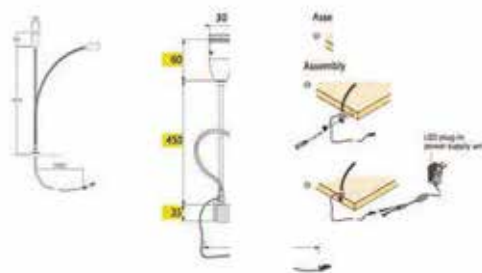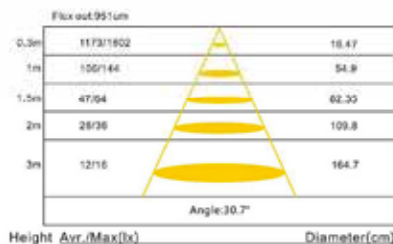

READING LIGHT

24RL01

LED light in Alluminio spazzolato.
Questa tipologia di luce viene utilizzata
per l'illuminazione di armadi, vetrine e
negozi.

Materiale: Alluminio spazzolato

Dimensioni: diam.30mm*H.450mm

Colori: argento

1W DC350mA / Richiede Driver.
3000K/4000K/6000K
70-80 ml
140 lx

JEWELRY SHOWCASE LED

24JS08


DC12V

Material	Aluminium and Anodized
Input	DC12V
Light source	1pcs 1.5W LED chip
Adjustable	Up/down 80 degree, horizon 350 degree
Finished Color	Silver
CCT	3000K/4000K/6000K

•Specification

Power consumption	Power Input	Lum@3000K	Flux@1M	CRI
2W	DC12V	140lm	22lx	≥80

If input AC 100-240V, need to add external LED driver

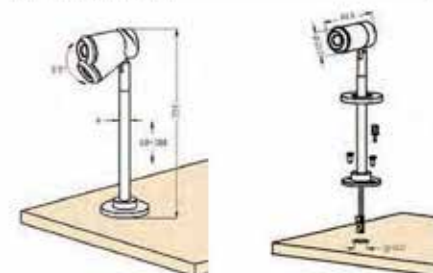

•Applications

Design for cabinet, showcase,
shop area illumination

•Accessory

LED driver, cable and connector,
please refer page 44,47

JEWELRY SHOWCASE LED

24JS07

DC12V



Material	Aluminium and Anodized
Input	DC12V
Light source	1pcs 2W LED chip
Adjustable	Up/down 80 degree, horizon 350 degree
Finished Color	Silver
CCT	3000K/4000K/6000K

•Specification


Power consumption	Power Input	Lum@6000K	Flux@1M	CRI
2W	DC12V	170lm	42lx	≥80

If input AC 100-240V, need to add external LED driver

Height	Avr./Max(lx)	Diameter(cm)
0.3m	2282/3264	15
0.5m	143/205	53
0.8m	64/93	80
1.0m	28/42	106
2.7m	9/15	160

Angle:30.2°

Height Avr./Max(lx) Diameter(cm)

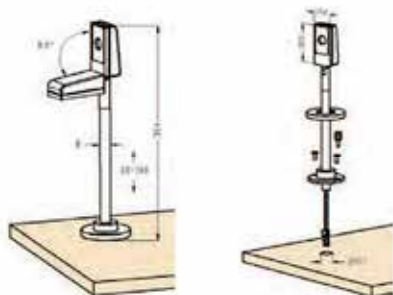

•Applications


Design for cabinet, showcase, shop area illumination

•Accessory

LED driver, cable and connector, please refer page 44,47

JEWELRY SHOWCASE LED

24JS01

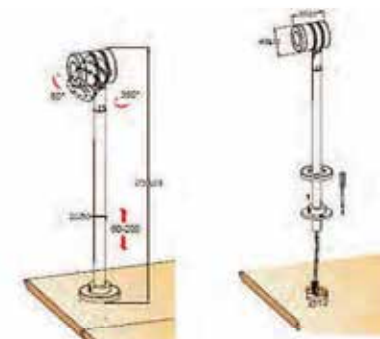

Height	Avr./Max(lx)	Diameter(cm)
0.3m	826/1325	38
1m	74/120	126.7
1.5m	33/53	190
2m	19/30	253.4
3m	8/13	360

Angle:54.7°

Materiale: Alluminio anodizzato

Dimensioni: diam.40mm*H.32mm

Foro: diam.35mm

Colori: argento, oro, nero.

3W DC350mA / Richiede Driver.

3000K/4000K/6000K

210 ml

150 lx



JEWELRY SHOWCASE 24JS01


Spotlight in Alluminio anodizzato orientabile dall'alto al basso di 80° e da destra a sinistra di 355°. Questa tipologia di luce viene utilizzata per l'illuminazione di armadi, vetrine e negozi.

LED FOCUS CF02

24CF02



	20.7°	3000K	4000K	6000K
0.3m		11.01cm 2747/3978LX	2717/3852LX	2828/3235LX
1.0m		36.71cm 247/358LX	244/348LX	254/291LX
1.5m		57.06cm 110/160LX	109/155LX	113/130LX
2.0m		73.41cm 62/90LX	61/87LX	63/73LX
3.0m		110.12cm 28/40LX	27/39LX	28/32LX

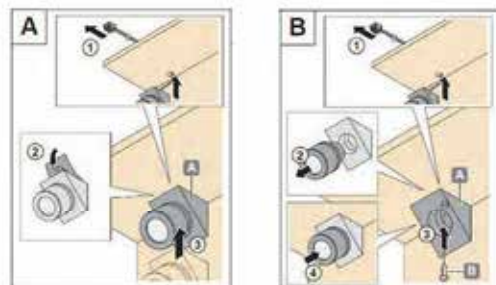

Materiale: Alluminio anodizzato
Dimensioni: 22mm*33mm*42mm
Colori: argento, oro, nero.

1W DC350mA / Richiede Driver.
70-80 lm
325 lx


Montaggio: viti o adesivo.

LED FOCUS Led Focus CF02

Spot in Alluminio anodizzato.
Questa tipologia di luce viene
utilizzata per
l'illuminazione di armadi,
vetrine e zone specifiche dei
negozi.

LED FOCUS CF01

24CF01

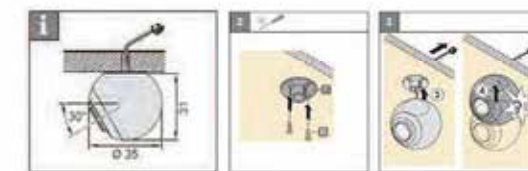

	20.7°	3000K	4000K	6000K
0.3m		11.01cm 2747/3978LX	2717/3852LX	2828/3235LX
1.0m		36.71cm 247/358LX	244/348LX	254/291LX
1.5m		57.06cm 110/160LX	109/155LX	113/130LX
2.0m		73.41cm 62/90LX	61/87LX	63/73LX
3.0m		110.12cm 28/40LX	27/39LX	28/32LX



Materiale: Alluminio anodizzato
Dimensioni: diam.35mm x H.32mm
Colori: argento, oro, nero.

1W DC350mA / Richiede Driver.
70-80 lm
325 lx


Montaggio: clip di montaggio e vite.

LED FOCUS Led Focus CF01

Spot in Alluminio anodizzato.
Questa tipologia di luce viene
utilizzata per
l'illuminazione di armadi,
vetrine e zone specifiche dei
negozi.

LED FOCUS CF03

24CF03

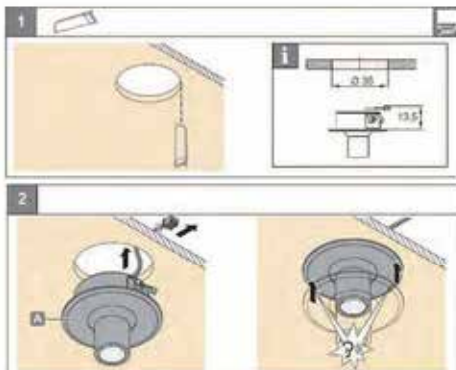

	20.7°	3000K	4000K	6000K
0.3m	11.01cm	2747/3078LX	2717/3852LX	2828/3235LX
1.0m	36.71cm	247/355LX	244/346LX	254/291LX
1.5m	57.06cm	110/160LX	109/155LX	113/130LX
2.0m	75.41cm	62/90LX	61/87LX	63/73LX
3.0m	110.12cm	28/40LX	27/39LX	28/32LX



LED FOCUS

Led Focus CF03

Spot in Alluminio anodizzato. Questa tipologia di luce viene utilizzata per l'illuminazione di armadi, vetrine e zone specifiche dei negozi.

Materiale: Alluminio anodizzato
Dimensioni: diam.40mm*H.32mm
Foro: diam.35mm
Colori: argento, oro, nero.

1W DC350mA / Richiede Driver.
70-80 ml
325 lx

Montaggio: viti o adesivo.

LED SLIM CABINET

24CB10
24CB11



CB11

Materiale: Acciaio Inossidabile
Spazzolato/lucidato

Dimensioni: 50mm*55mm x H.8mm
Colori: argento, cromo.

18pcs 3014
18W DC12-24V / Richiede alim. 12V.
170 ml
140 lx

Montaggio tramite avvitamento o adesivo.



CB10



LED SLIM CABINET

Spot in Acciaio Inossidabile
Spazzolato/Lucidato.
Questa tipologia di luce viene utilizzata per l'illuminazione di armadi, vetrine e zone specifiche dei negozi.

Materiale: Acciaio Inossidabile
Spazzolato/lucidato

Dimensioni: diam. 55mm x H.8mm
Colori: argento, cromo.

18pcs 3014
18W DC12-24V / Richiede alim. 12V.
170 ml
140 lx


Montaggio tramite avvitamento o

LED CABINET

24CB07



	105.5°	3000K	4000K	8000K
0.3m		78.90cm	206/607LX	237/641LX
1.0m		263.01cm	19/54LX	28/65LX
1.5m		394.52cm	8/24LX	17/33LX
2.0m		526.03cm	4/14LX	8/19LX
3.0m		789.04cm	2/6LX	6/11LX



LED CABINET



Spot in alluminio spazzolato.
Questa tipologia di luce viene
utilizzata per
l'illuminazione di armadi,
vetrine e zone specifiche dei
negozi.

Materiale: alluminio spazzolato
Dimensioni foro: diam. 60mm
Dimensioni: diam. 65mm x H. 13mm
Colori: argento, nero, bianco, cromo.

3W DC12V / Richiede alimentatore 12V.
3000K
260 lm
50 lx

LED CABINET

24A10004




Part No	Max[W]	Hole	LEDs	Lumen		
				2700K	4000K	6500K
A10004-5W	5W	57mm	5W COB	390 lm	400 lm	420 lm

Note: Colour Temperature: Warm white: 2700K CRI>80

SIRIO

24DP08

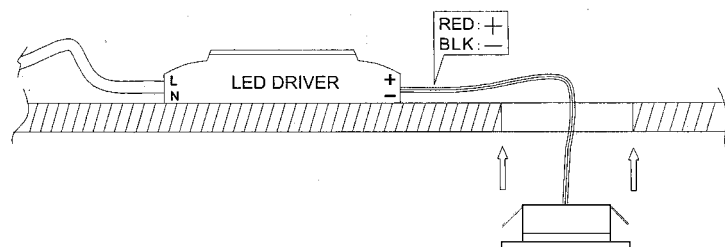

Materiale: Alluminio
Dimensioni: Diam. 35mm x H. 14mm
Colori: Alluminio anodizzato, Bianco
Foro: 29mm

1.5W 100lm 3000K°
DC12V (Collegamento in parallelo)
Richiede Alim. (DL1203 o DL1206)
IP45
LED_6PCS 2835



SIRIO LED

Faretto LED mini da incasso.
Questa tipologia di luce viene
utilizzata per l'illuminazione di
armadi, vetrine, negozi e cieli.

Ufficio - Aree tecniche -
Zone comuni

A901.01

34A901.01



A901.01



MR16/GU10

Ø.80
H.35



Scocca rotonda per faretto ad incasso con cornice bianca di rifinitura a vista. Inseribili in pareti di cartongesso e dotata di sistema direzionabile della luce.



MWH



SWH



MBK



SBK



GY



INCASSI

34T211



T211



MR16/GU10

Ø.95
H.42



Scocca per faretto ad incasso inseribile in cartongesso. Pressofusione di alluminio con piastra in ferro e magnete.



MWH



SWH



MBK



SBK



GY



INCASSO D40

34D40.1
34D40.1A



D40-1







Model	D40-1
LED	CREE CEA 2530 1 PCS
Beam Angle	20 / 30°
LED Power	26 W
For. Current	700 mA
For. Voltage	37 V
CR	>80
Finish	Matt White



D40-1A



Model	D40-1A
LED	CREE CEA 2530 1 PCS
Beam Angle	20 / 30°
LED Power	26 W
For. Current	700 mA
For. Voltage	37 V
CR	>80
Finish	Matt White



Details Of The Plan



This fixture has a support rim that is hinged to the lamp body, which can be inclined by 30° and rotate by 355°.

The radiator is integrated and made of die-cast aluminium.


Variety of reflectors and lenses are provided.

SPOT D26-2

34D26.2



Model	D26-2
LED	CREE CEA 2530 1 PCS
Beam Angle	24 / 36°
LED Power	34 / 39 W
For. Current	900 / 1000 mA
For. Voltage	38 / 39 V
CR	>80
Finish	Matt White





INCASSO D52



34D52.1
34D52.2
34D52.3



D52-1




Model:	D52-1
LED:	CREE CKA 1507 1 PCS
Beam Angle:	25°
LED Power:	11 / 14 W
For Current:	280 / 350 mA
For Voltage:	39 / 40 V
CR:	≥ 80
Finish:	Matt White



D52-2





Model:	D52-2
LED:	CREE CKA 1507 1 PCS
Beam Angle:	30°
LED Power:	11 / 14 W
For Current:	280 / 350 mA
For Voltage:	39 / 40 V
CR:	≥ 80
Finish:	Matt White



D52-3



Model:	D52-3
LED:	CREE CKA 1507 1 PCS
Beam Angle:	30°
LED Power:	11 / 14 W
For Current:	280 / 350 mA
For Voltage:	39 / 40 V
CR:	≥ 80
Finish:	Matt White



Three different types of frames are provided to meet various need.

The frames are easy to be replaced by hand.

Separate packing of frame and LED module enable more flexible choices.

INCASSO D70-1


34D70.1



D70-1



Model:	D70-1
LED:	CREE CKA 1507 3 PCS
Beam Angle:	20°
LED Power:	11 / 14 W
For Current:	280 / 350 mA
For Voltage:	39 / 40 V
CR:	≥ 80
Finish:	Matt White



NED

34NED30W04



Lumens: 2100/2300 Lm
Colore temperatura & CRI:
3000K, 4000, 6000K > 80 Ra
Durata: 50000 ore

Input Voltage: AC 100-240V 50/60Hz
Potenza: 30W
High quality COB

Dimensioni: diam. 160 x h. 116 mm
Foro: 139 mm
Driver esterno incluso
Peso netto: 1.1 Kg
Materiale: alluminio
Per usi interni: negozi, teatri,
ohotel, case ecc...



Certificazione: CE, Rohs





INCASSO

34SDR074
34SDR075

Model No.:	SDR-074
Power Consumption	8W
Operational Voltage	AC85V~265V
Color Temperature	2700K~5000K
CRI	Min>80
Beam Angle Range	26° / 38°
Intensity of Light Output	640lm
Driver	Include
Expected Life	50,000 hours
Rating	IP 44


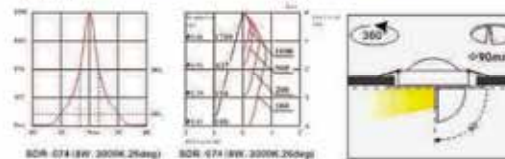


Model No.:	SDR-075
Power Consumption	16W
Operational Voltage	AC85V~265V
Color Temperature	2700K~5000K
CRI	Min>80
Beam Angle Range	26° / 38°
Intensity of Light Output	1280lm
Driver	Include
Expected Life	50,000 hours
Rating	IP 44

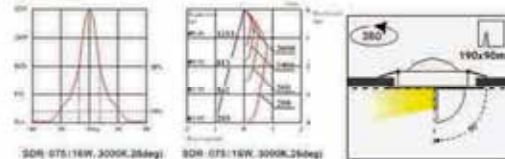

INCASSO

342152-ROTONDO
342152-QUADRATO



INCASSO D6


34D6.1
34D6.2



D6-1




Model	D6-1
LED	EDISON 3014 x 30 PCS
Beam Angle	100°
LED Power	5.8 W
For. Current	350 mA
For. Voltage	16.6 V
CRI	> 70
Finish	Matt White / Silver Grey



D6-2




Model	D6-2
LED	EDISON 3014 x 30 PCS
Beam Angle	100°
LED Power	5.8 W
For. Current	350 mA
For. Voltage	16.6 V
CRI	> 70
Finish	Matt White / Silver Grey




INCASSO

34SDR043
34SDR044

Model No.:	SDR-043
Power Consumption	15W/20W/30W
Operational Voltage	AC85V~265V
Color Temperature	2700K~5000K
CRI	Min>80
Beam Angle Range	15° /26° /38° /44°
Intensity of Light Output	1000lm~2900lm
Driver	Include
Expected Life	50,000 hours
Rating	IP 44

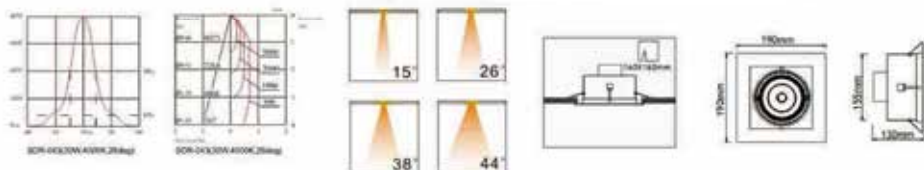

Model No.:	SDR-044
Power Consumption	30W/40W/60W
Operational Voltage	AC85V~265V
Color Temperature	2700K~5000K
CRI	Min>80
Beam Angle Range	15° /26° /38° /44°
Intensity of Light Output	2000lm~5800lm
Driver	Include
Expected Life	50,000 hours
Rating	IP 44

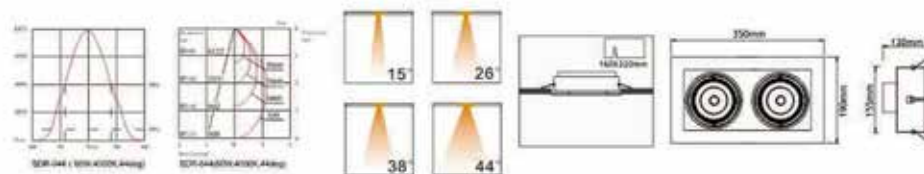


INCASSO

34SDR045
34SDR046

Model No.:	SDR-045
Power Consumption	45W/60W/90W
Operational Voltage	AC85V~265V
Color Temperature	2700K~5000K
CRI	Min>80
Beam Angle Range	15° /26° /38° /44°
Intensity of Light Output	3000lm~8700lm
Driver	Include
Expected Life	50,000 hours
Rating	IP 44




Model No.:	SDR-046
Power Consumption	60W/80W/120W
Operational Voltage	AC85V~265V
Color Temperature	2700K~5000K
CRI	Min>80
Beam Angle Range	15° /26° /38° /44°
Intensity of Light Output	4000lm~11600lm
Driver	Include
Expected Life	50,000 hours
Rating	IP 44

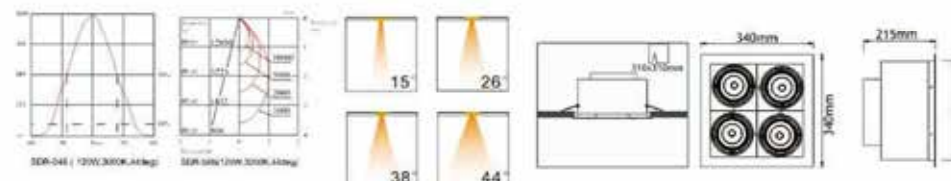

PANEL D27

34D27.1
34D27.2

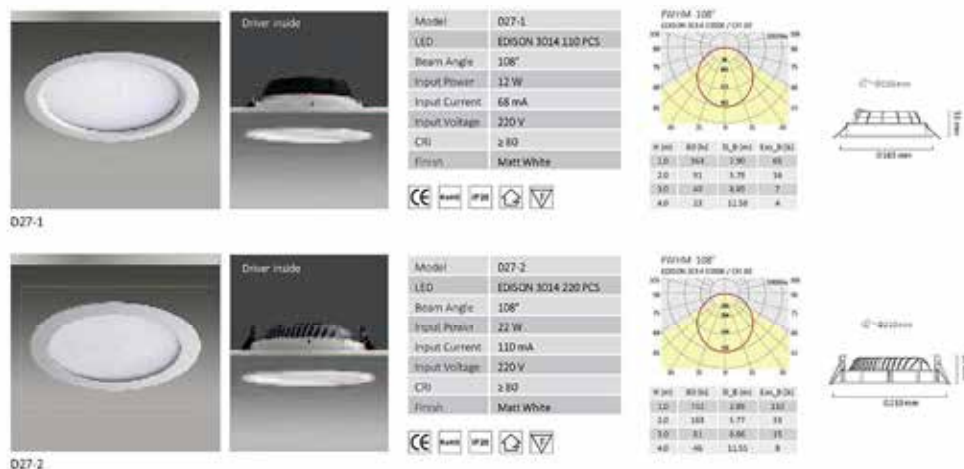


HOLLA

341481-18W
341481-24W



DATI TECNICI


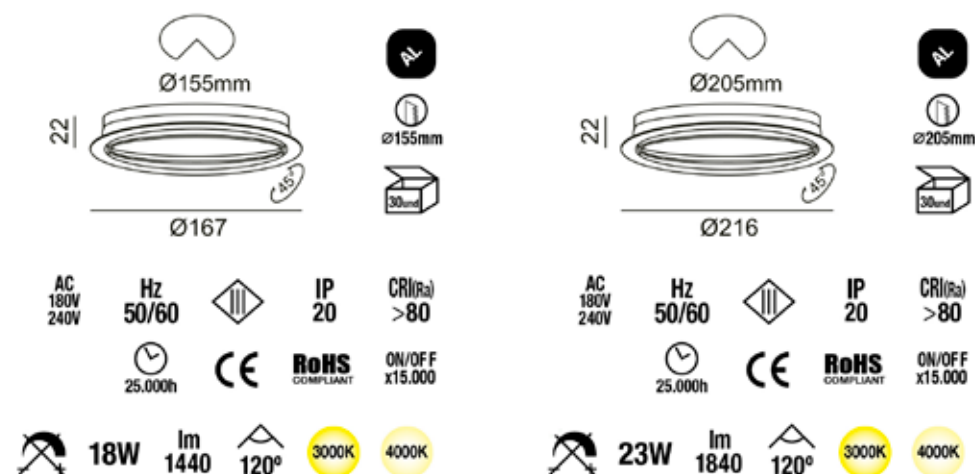


GAMMA

341486-W





DATI TECNICI

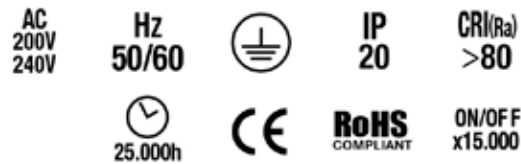

DISCO LED

340067-3000K

340068-4000K

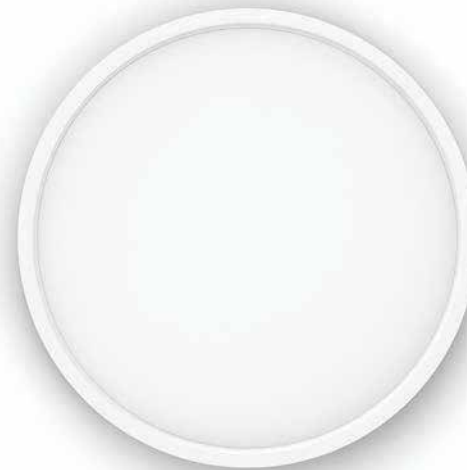


V	W	LM	K	Beam Angle (°)	Ø	D	Ra	ON/OFF
220-240	24	2000	3000	120°	300	24	>80	>15000
220-240	24	2200	4000	120°	300	24	>80	>15000



GLASS


34760-ROTONDO
34760-QUADRATO




TRI-PROOF

34TRI1265
34TRI1565

Model No.	SDF-012
Power Consumption	20W/40W
Operational Voltage	AC85V~265V
Color Temperature	3000K~6000K
CRI	Min>70
Beam Angle Range	180°
Intensity of Light Output	1725lm~1865lm
Driver	Include
Expected Life	50,000 hours
Rating	IP68
Length	1265mm

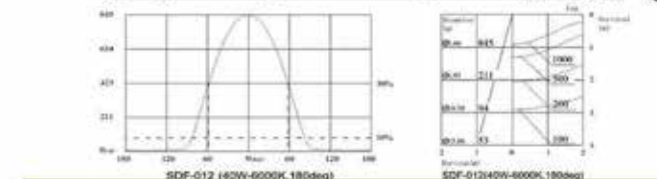


Model No.	SDF-015
Power Consumption	30W/60W
Operational Voltage	AC85V~265V
Color Temperature	3000K~6000K
CRI	Min>70
Beam Angle Range	180°
Intensity of Light Output	2705lm~2840lm
Driver	Include
Expected Life	50,000 hours
Rating	IP68
Length	1565mm

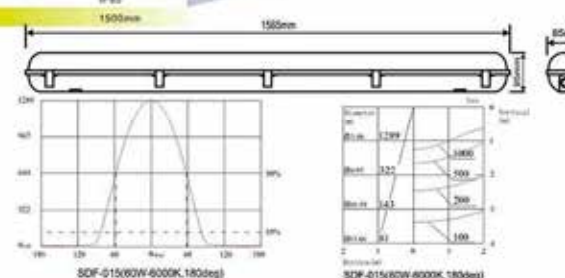





PANEL

34SDP004

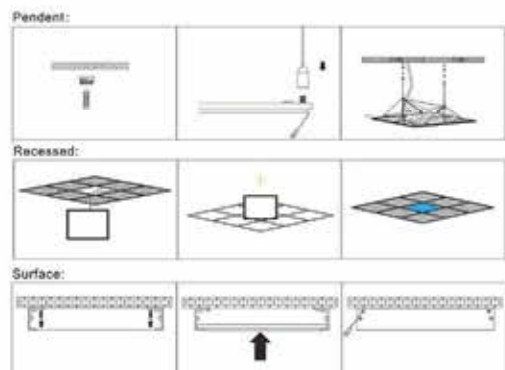

Model No.:	SDP-004
Power Consumption	48W
Operational Voltage	AC85V-265V
Color Temperature	3000K-6000K (adjustable)
CRI	Min>80
Beam Angle Range	120°
Intensity of Light Output	4000lm-4600lm
Driver	Include
Expected Life	50,000 hours
Rating	IP 44



GUF

34GUF101
34GUF101C
34GUF100
34GUF100C



1 GUF101 (luce fredda)
GUF101C (luce calda)
m³ 0,05
lamp. 2x2G11
watt. max 55W 230V
IP20

2 GUF100 (luce fredda)
GUF100C (luce calda)
m³ 0,09
lamp. 2xT5
watt. max 54W 230V
IP20





GLA055
GLA055C
2G11
55W 230V



GLA019
GLA019C
T5
54W 240V


Struttura in metallo, finitura bianca.
Diffusore in PVC.
Lampadine incluse.
White metal fitting.
PVC diffuser.
Bulbs included.






DRUPAL_B

34DDC65130

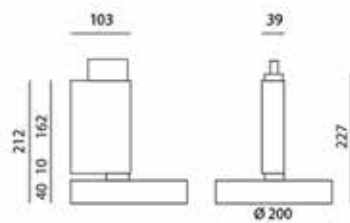

Drupal_b



14DDC65130

DRUPAL

Drupal_b

Spotlight realizzato in alluminio pressofuso e verniciato a polvere. Copertura in policarbonato satinato per fornire una fonte di luce uniforme.

Option:
Color temperature control,
32W - 2700/5000K -
dimmable driver.



BINARIO S88-1

34S88.1BL
34S88.1WH

Track Lights


- Excellent light effect with artistic classic design.
- Rotation around the vertical axis up to 60°, tilt of 60° is achieved in the
- variety of reflections are provided.





S88-1



Model	S88-1
LED	CREE CEA 1810 1 PCS
Beam Angle	15 / 24°
LED Power	22 W
For Current	900 mA
For Voltage	37 V
On	≥ 90
Finish	Matt Black / Matt White



S88-1





Track Lights

BINARIO


34S31.3
34S31.3A



331-3









331-3A



Model	331-3
LED	CHS CDA 1830 or 2520
Beam Angle	24 or 36°
LED Power	33 W
For Current	900 mA
For Voltage	27 V
CFI	± 80
Finish	Matt White



Model	331-3A
LED	CHS CDA 1830 or 2520
Beam Angle	25/30° or 37/26°
LED Power	33 W
For Current	900 mA
For Voltage	27 V
CFI	± 80
Finish	Matt White





340-1





340-2

Model	340-1
LED	SMD 3034
Beam Angle	110°
Input Power	25 W
Input Current	95 mA
Input Voltage	220 V
CFI	± 70
Finish	Matt White



Model	340-2
LED	9PCS
Beam Angle	24°
Input Power	32 W
Input Current	66 mA
Input Voltage	220 V
CFI	± 80
Finish	Matt White



340-2



340-1



BINARIO


34S40.1
34S40.2






BINARIO


34S38.1



S38-1



H (m)	E0 (lx)	D_0 (m)	Eav_0 (lx)
1.0	16115	0.33	7260
2.0	4029	0.65	1815
3.0	1791	0.98	807
4.0	1007	1.31	454



H (m)	E0 (lx)	D_0 (m)	Eav_0 (lx)
1.0	11015	0.46	4720
2.0	2754	0.91	1180
3.0	1224	1.35	524
4.0	688	1.82	295

Model	S38-1
LED	CREE CWA 1830 / 2530 1 PCS
Beam Angle	19 / 27°
LED Power	33 W
For Current	900 mA
For Voltage	37 V
CRI	≥70
Finish	Matt White



BINARIO SDY

34SDYA15W
34SDYA30W
34SDYA40W
34SDYA60W
34SDYA80W

34SDYB15W
34SDYB30W
34SDYB40W
34SDYB60W
34SDYB80W

Model No.	Length (L)	Power	Color Temperature
	572mm	15W	3000K/4000K/6000K
	572mm	30W	3000K/4000K/6000K
	1430mm	40W	3000K/4000K/6000K
	1430mm	60W	3000K/4000K/6000K
	1430mm	80W	3000K/4000K/6000K

- Scocca alluminio: nero, bianco, argento.
- IP42
- Range temperatura: -30°C... +40°C



34SDYA15W Model No.	Length (L)	Power	Color Temperature
34SDYB30W			
34SDYB40W	572mm	15W	3000K/4000K/6000K
34SDYB60W	572mm	30W	3000K/4000K/6000K
34SDYB80W	1430mm	40W	3000K/4000K/6000K
	1430mm	60W	3000K/4000K/6000K
	1430mm	80W	3000K/4000K/6000K

STO 20W/35W


341562- 20W

341563- 35W




Colori: **B** **C** **R** **W**

DATI TECNICI

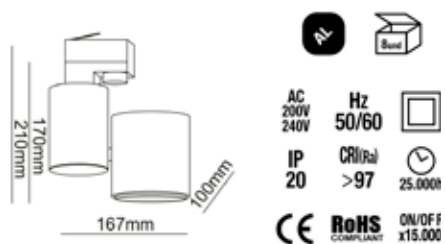

20W lm 1440 PF >0.95 38° 3000K 4000K

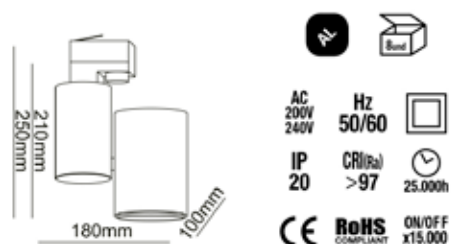


35W lm 2465 PF >0.95 38° 3000K 4000K

A scomparsa cartongesso-
Invisibili

LED DOWN SPOT

64DD12080

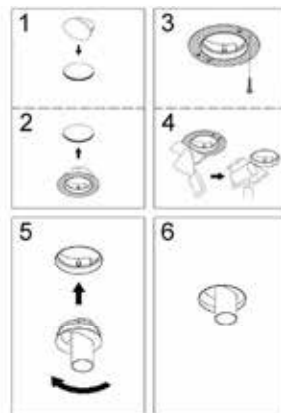

Led down spot_01

64DD.12080.01

9W - 26V - 365Lm
3000K - 350mA

Ø.132




Led down spot_02

64DD.12080.02

9W - 26V - 365Lm
3000K - 350mA

Ø.129




Led down spot_03

64DD.12080.03

9W - 26V - 365Lm
3000K - 350mA

Ø.130



LED DOWN SPOT

Led down spot

Faretti da incasso verniciati a polvere.

KRT PLASTER WALL

6420220.160.02

6420221.026.02

6460220.000



KRT PLASTER WALL

KRT Plaster Wall è un apparecchio Wall Washer da incasso in gesso a scomparsa totale, che si integra perfettamente nell'ambiente, essendo possibile colorarlo nella stessa tinta della parete.

KRT Plaster Wall è possibile installarlo nelle pareti in cartongesso con le squadrette regolabili in dotazione, o nelle pareti in concreto utilizzando l'apposita cassaforma (art. 6460220.000)

KRT Plaster Wall accoglie una lampada alogena R7s 230V 160W o fluorescente compatta G24q3 da 26W, completa di reattore elettronico



6460220.000



CE V IP20

G24q-3

02

KRT Plaster Wall

Lampada da incasso in gesso per alogena R7s 230V 160W o fluorescente compatta G24q3 da 26W, completa di reattore elettronico

6420220.160.02 ○ 1x8W LED Warm White 220V

6420221.026.02 ○ 1x26W - G24q-3 **ES**



1. Posizionare la cassaforma (art. 6460220.000)
2. Installare e fissare la cassaforma considerando lo spessore del successivo gesso.
3. Stuccare e riempire la cavità del profilo accuratamente, sino a rendere omogenea la superficie.

KRT PLASTER MARKER

6420190.050.02
6420191.050.02
6460190.000



KRT PLASTER MARKER

KRT Plaster Marker è un faretto da incasso Wall Washer in gesso che si integra perfettamente nell'ambiente essendo possibile colorarlo nella stessa tinta della parete.

KRT Plaster Marker è possibile installarlo nelle pareti in cartongesso con le squadrette regolabili in dotazione, o nelle pareti in concreto utilizzando l'apposita cassaforma (art.60190.000), ed è adatto per segnalazione o luce di cortesia.

KRT Plaster Marker accoglie una lampada dicroica G5,3 12V 50W, GU10 230V 50W o a led da 3W



Box
6460190.000



CE F IP20



02



KRT Plaster Marker

Faretto da incasso in gesso per dicroica G5,3 12V 50W, GU10 230V 50W o a Led da 3W. La versione G5,3 necessita di trasformatore 12V, non incluso

6420190.050.02 ○ 1x50W - GU10
6420191.050.02 ○ 1x50W - GU5,3



1. Posizionare la cassaforma (art.60190.000)
2. Intonacare e fissare la cassaforma considerando lo spessore del successivo gesso
3. Stuccare e riempire la cavità del profilo accuratamente, sino a rendere omogenea la superficie



IN 160/220/274

64IN160
64IN220
64IN274



IN-160

64IN160

LED - 8W - 220V

Ø.160 H.120



IN-220

64IN220

LED - 16W - 220V

Ø.220 H.120



IN-274

64IN274

LED - 16W - 220V

Ø.274 H.120



Scatola rotonda per faretto ad incasso. Inseribili in pareti di cartongesso. Lente bianco opale.



Scatola rotonda per faretto ad incasso. Inseribili in pareti di cartongesso. Lente bianco opale.



Scatola rotonda per faretto ad incasso. Inseribili in pareti di cartongesso. Lente bianco opale.

A907



A907



64A907



MR16/GU10

L.75



Scatola rotonda per faretto ad incasso. Inseribili in pareti di cartongesso e dotata di sistema direzionabile della luce. Materiale in alluminio.



A904

64A904



A904




64A904



MR16/GU10



Scocca quadrata per faretto ad incasso a scomparsa totale inseribile in pareti di cartongesso. Dotato di sistema direzionabile della luce.

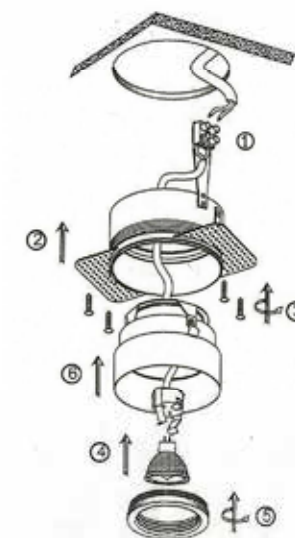

64B-01



2W×1 AC200-240V ADC12 Aluminum -20°C~+50°C 35×35×H49mm 42×42mm

64B-02



2W×2 AC200-240V ADC12 Aluminum -20°C~+50°C 65×35×H49mm 72×42mm

64B-05



2W×5 AC200-240V ADC12 Aluminum -20°C~+50°C 138×35×H49mm 144×42mm

64B-10





2W×10 AC200-240V ADC12 Aluminum -20°C~+50°C 270×35×H49mm 277×42mm

64B-15



2W×15 AC200-240V ADC12 Aluminum -20°C~+50°C 403×35×H49mm 409×42mm

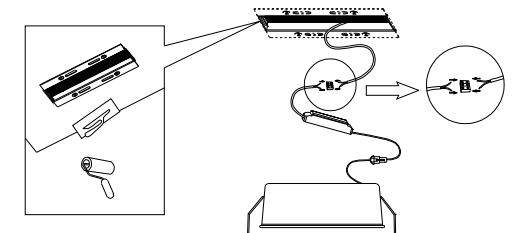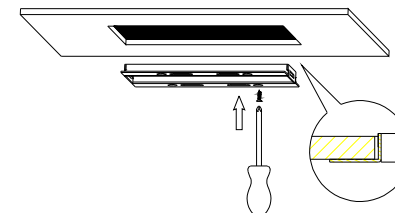

TEKPF_03

64TEKPF03
64TEKPF03TA
64TEKPF03A
64TEKPFAPS



Tekpf_03

64TEKPF03

L.200
H.83
P.137

Versione bassa. Scatola portafaretto universale per utilizzo nelle murature e cemento armato. Imballo 30pz (L.59 x H.37 x P.39).



Tekpf_03A

64TEKPF03A

L.200
H.113
P.137

Versione alta. Scatola portafaretto universale per utilizzo nelle murature e cemento armato. Imballo 20pz (L.59 x H.47 x P.39).



TekpfAP_S

64TEKPFAPS

Sistema applicativo per il posizionamento della scatola ad 1 cm dal laterizio per il successivo intonaco. Confezione unitaria.




Tekpf_03TA

64TEKPF03TA

L.360
H.113
P.137

Versione alta con porta trasformatore. Scatola portafaretto con alloggiamento trasformatore: stese funzioni della EKPFO3A con possibilità di inserire il trasformatore al suo interno. Imballo 20pz (L.59 x H.47 x P.39).

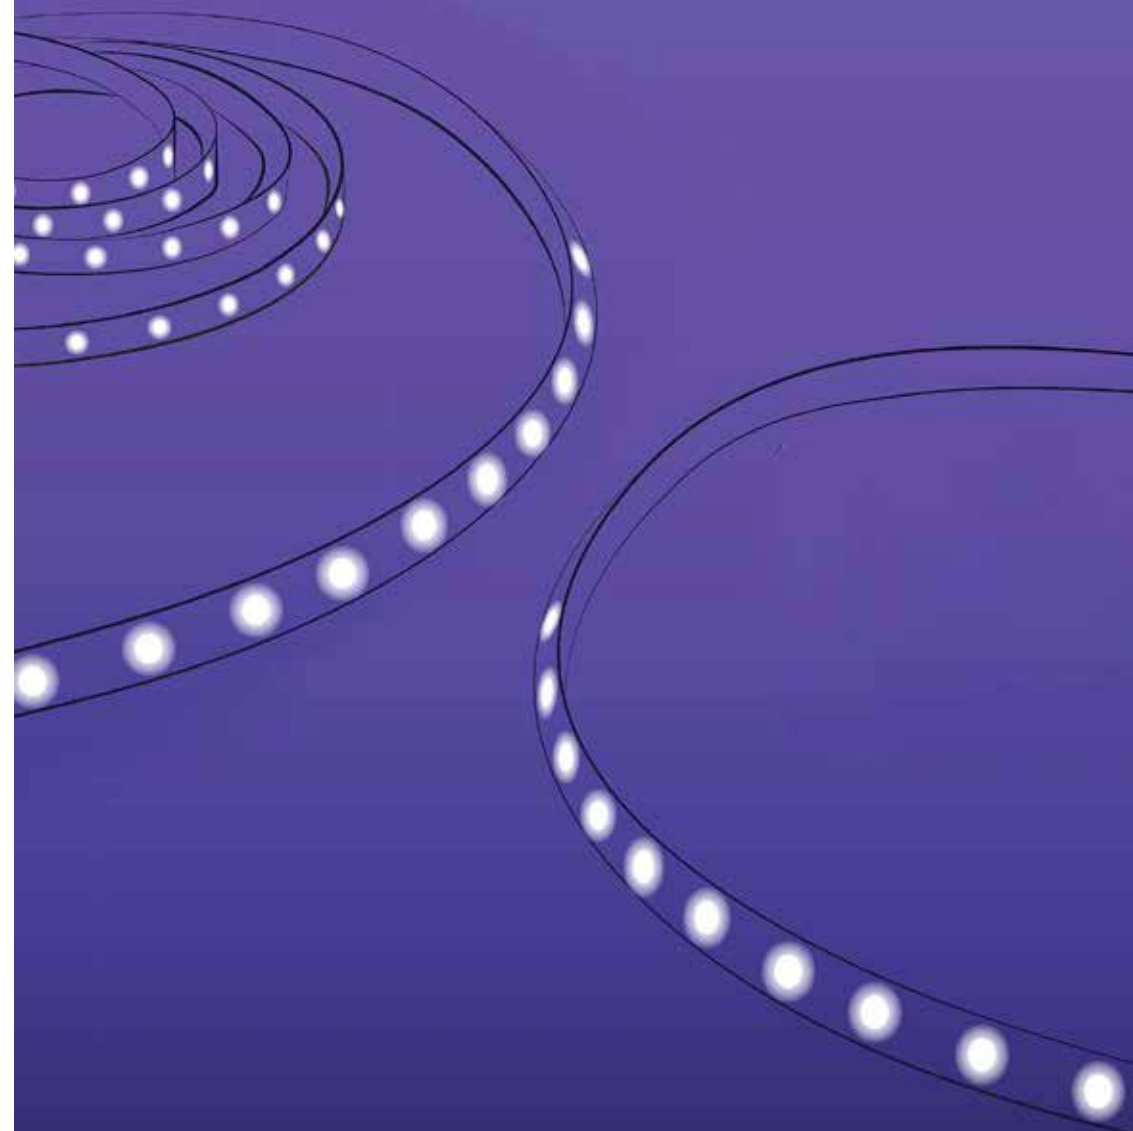

Strip - Schede - Moduli



STRIP LED 3014 12V

84124.4WW1
84124.4N1




Strip led_3014

84124.4WW1
84124.4N1

12W - 12V - 3000/4000/6000K
W.10 x H.0.3 - 120leds/M

Technical Operatic Characters TA=25°

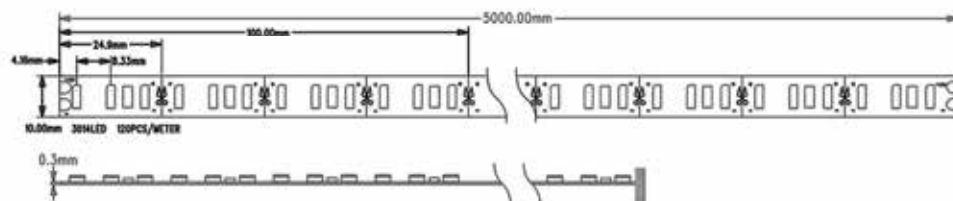

• Specification

	Volt	Colore	N. Led	CRI	Watt	Lm/M	IP	L.a.	S.	L.g.
FS02127W17	12	3000K Warm	120	87	12	1050	Ip20	8/10	0.3	500-5000
FS02127N17	12	4000K Neutral	120	90	12	1090	Ip20	8/10	0.3	500-5000

CE RoHS IP20



STRIP LED

Strip led_3014

Strip led flessibile a luce bianca. Strip a 3 led a 12V, strip 6 led a 24V. Facile installazione grazie all'adesivo 3M posto sul retro o attraverso la clip. Dimmer e driver possono essere abbinati.
Applicazioni:
_illuminazione decorativa architettonica;
_illuminazione decorativa della scala;
_decorazione dell'interno e delle vetrine;
_illuminazione d'emergenza e sicurezza;
_segnapassi.

SMD 3014 300PCS or 600PCS/roll (5000mm*10mm)

3-LED cuttable for DC12V, 6-LED Cuttable for 24V

Easy to install with 3M adhesive on back or clip

Dimmer & driver can be matched

Operating temperature: -20C° to +45C°

Auto-SMT machine for soldering

Long Operation life: 30,000 to 50,000 hrs

Durable structure & stable performance

CE/RoHS compatible



STRIP LED 3014 24V

8424.4WW1
8424.4N1




Strip led_3014

8424.4WW1
8424.4N1

24W - 24V - 3000/4000K
W.11 x H.0.3 - 240led s/M

Technical Operatic Characters TA=25°

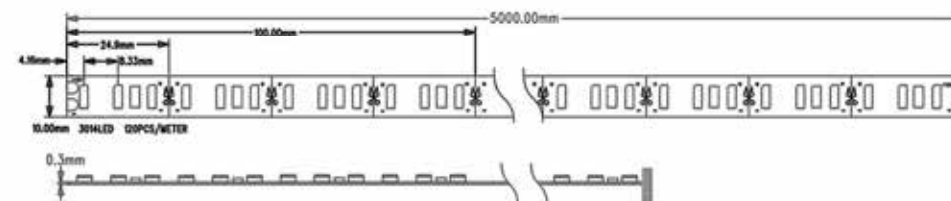

• Specification

	Volt	Colore	N. Led	CRI	Watt	Lm/M	IP	L.a.	S.	L.g.
FS02127W17	24	3000K Warm	240	87	24	2400	Ip20	8/10	0.3	500-5000
FS02127N17	24	4000K Neutral	240	90	24	2880	Ip20	8/10	0.3	500-5000

CE RoHS IP20



STRIP LED

Strip led_3014

Strip led flessibile a luce bianca. Strip a 3 led a 12V, strip 6 led a 24V. Facile installazione grazie all'adesivo 3M posto sul retro o attraverso la clip. Dimmer e driver possono essere abbinati.
Applicazioni:
_illuminazione decorativa architettonica;
_illuminazione decorativa della scala;
_decorazione dell'interno e delle vetrine;
_illuminazione d'emergenza e sicurezza;
_segnapassi.

SMD 3014 300PCS or 600PCS/roll (5000mm*10mm)

3-LED cuttable for DC12V, 6-LED Cuttable for 24V

Easy to install with 3M adhesive on back or clip

Dimmer & driver can be matched

Operating temperature: -20C° to +45C°

Auto-SMT machine for soldering


Long Operation life: 30,000 to 50,000 hrs

Durable structure & stable performance

CE/RoHS compatible

STRIP LED 5630

84125.1WW1
84124.1N1

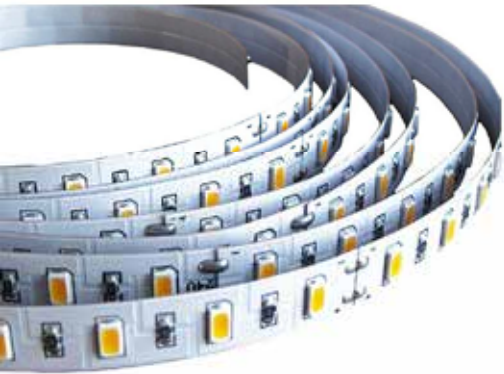

CE RoHS IP20




STRIP LED

Strip led_5630


Strip led_5630

15W - 12V - 3000/4000/6000K
1200/1300/1400Lm/M - 70/85/98Lm/W
W.10 x H.0.3 - 30leds/M



1) Operation with shorter length possible. Recommended minimum length to achieve optimum operating conditions.

2) Total length per driver. Length of single strip must not exceed 10 m.



Strip led flessibile a luce bianca.
Strip a 3 led a 12V, strip 6 led a
24V. Facile installazione grazie
all'adesivo 3M posto sul retro o
attraverso la clip. Dimmer e driver
possono essere abbinati.


Applicazioni:

- _illuminazione decorativa
architettonica;
- _illuminazione decorativa della
scala;
- _decorazione dell'interno e delle
vetrine;
- _illuminazione d'emergenza e
sicurezza;
- _segnapassi.

MODULO 3535

843535W01


Modulo Samsung 3535 1-LED Waterproof con lenti 10°*60° (BoxLED Module)

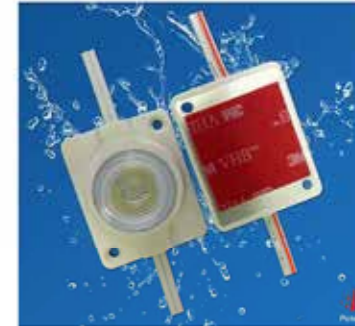

Power (W)	2
LED quantity	1
Dimensions (mm)	43X35X13.5
IP rating	67
Colour temperature (K)	3000, 4000, 6000-7000, 7000+
Lumens output (Lm)	175
Luminous efficacy (Lm/W)	>80lm/W
Angle (°)	10° * 60°
Type of LED	3535 SMD
PCB	Aluminum
Housing	ABS
Voltage (V)	12V DC
Driver position	outside
Lifespan (hours)	50000
Light degradation (%/xHours)	
Materials	ABS casing + Aluminum PCB
Ambient Temperature (°C)	-40 - 50
Warranty	5 years

Notes: Every Module can be cut.

Dimension (Unit: mm):

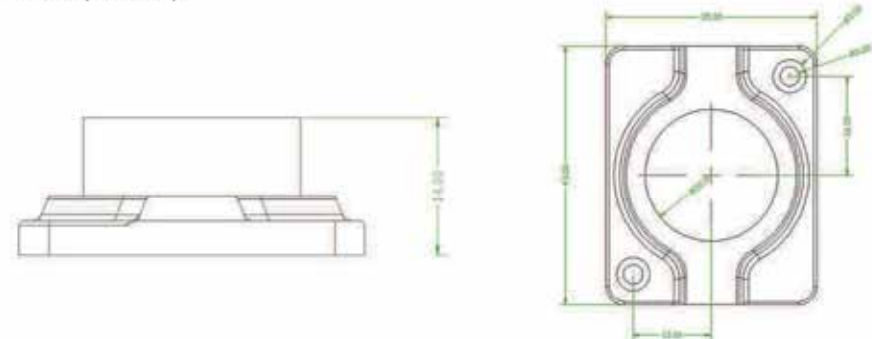


Rif. 843535W01

Adatto per insegne luminose a due lati.

Notes:

1. Different sizes of signage boxes or requiring different brightness, the distance between LED module can be changed accordingly.
2. The width / height of signage boxes should be no more than 2000mm (the distance from both lighting sides).
3. The depth of signage box should be between 150mm and 300mm.

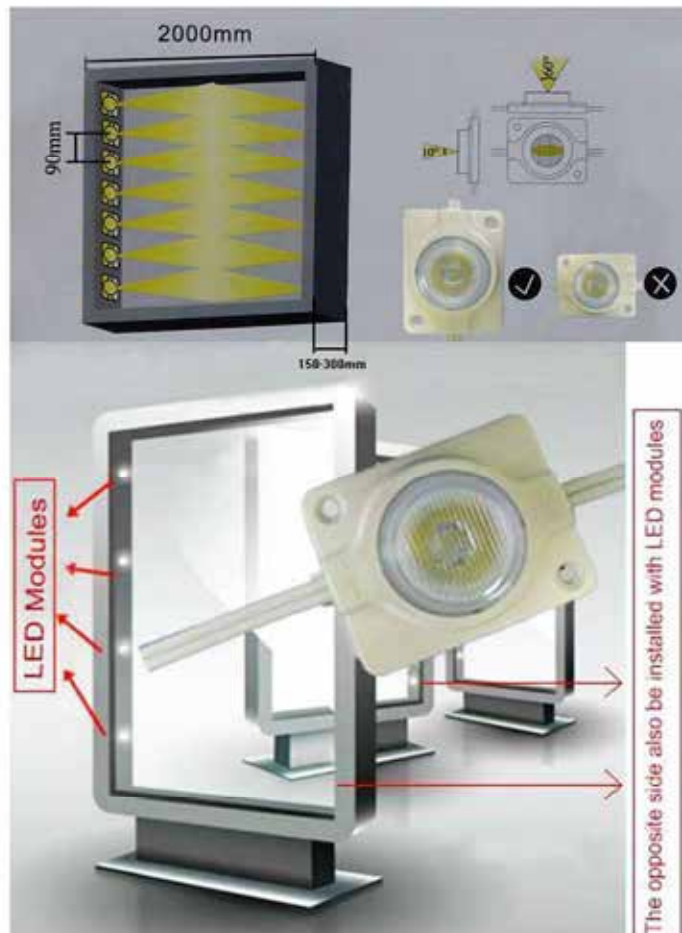


Modulo Samsung 5630 4-LED Waterproof con lenti 120°



Power (W)	2
LED quantity	4
Dimensions (mm)	38x38x5.3
IP rating	67
Colour temperature (K)	2900-3100, 3900-4100, 6000-7000
Lumens output (Lm)	132-144
Luminous efficacy (Lm/W)	>66
Angle (°)	120
Type of LED	5630 SAMSUNG
PCB	aluminum
Housing	ABS
Voltage (V)	12
Driver position	outside
Lifespan (hours)	50000
Light degradation (%/xHours)	
Materials	ABS casing + aluminum PCB
Working Temperature (°C)	-40 - 50
Warranty	5 years

Dimension (Unit: mm):

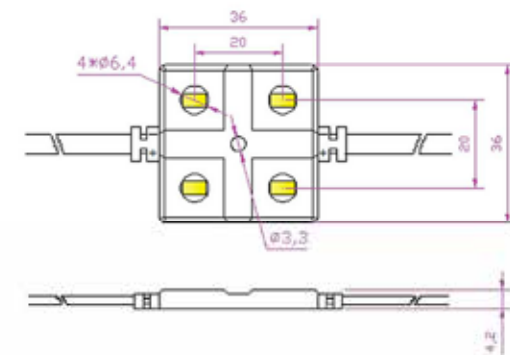

MODULO 5630

845630W04160



Modulo Samsung 5630 4-LED Waterproof con lenti a 160°



SAMSUNG


Power (W)	2
LED quantity	4
Dimensions (mm)	40X40X5
IP rating	87
Colour temperature (K)	2900-3100, 3900-4100, 6000-7000
Lumens output (Lm)	140-150
Luminous efficacy (Lm/W)	>64
Angle (°)	160
Type of LED	5630 SAMSUNG
PCB	Aluminum
Housing	ABS
Voltage (V)	12
Driver position	outside
Lifespan (hours)	50000
Light degradation (%/xHours)	
Materials	ABS casing + Aluminum PCB
Working Temperature (°C)	-40 - 50
Warranty	5 years

Dimension (Unit: mm):

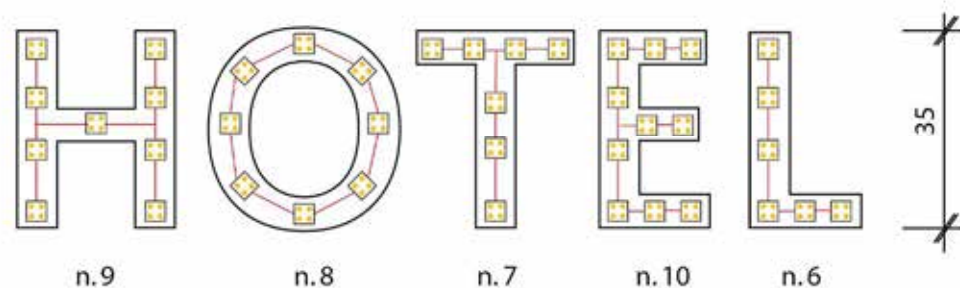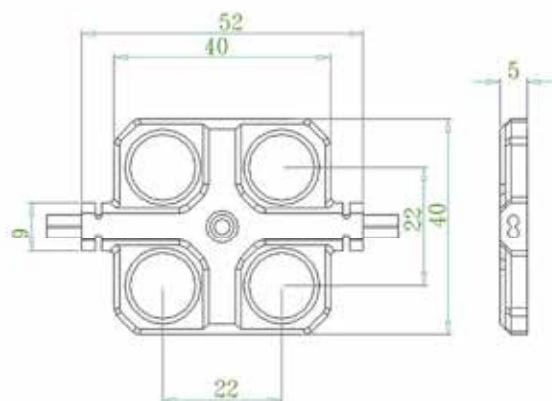

SCHEDE RIGIDE

84L.3W
84L.8W
84L.16W
84L.R8W

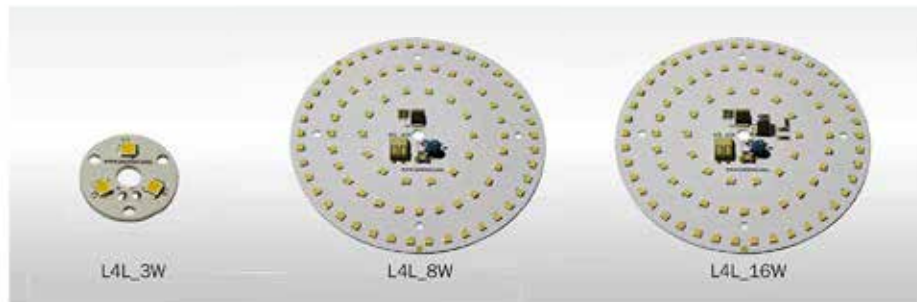

Scheda_3W

Scheda_8W

Scheda_16W

84L_3W

84L_8W

84L_16W

150mA - 3W

220V - 8W

220V - 16W

Ø.20

Ø.120

Ø.120

Scheda_R8W

84L_R8W

220V - 8W


L.260 x H.21 x 6



Profili per mobili - Cartongessi -
Sospensioni

PROFILI 74BAP

74BAPL001

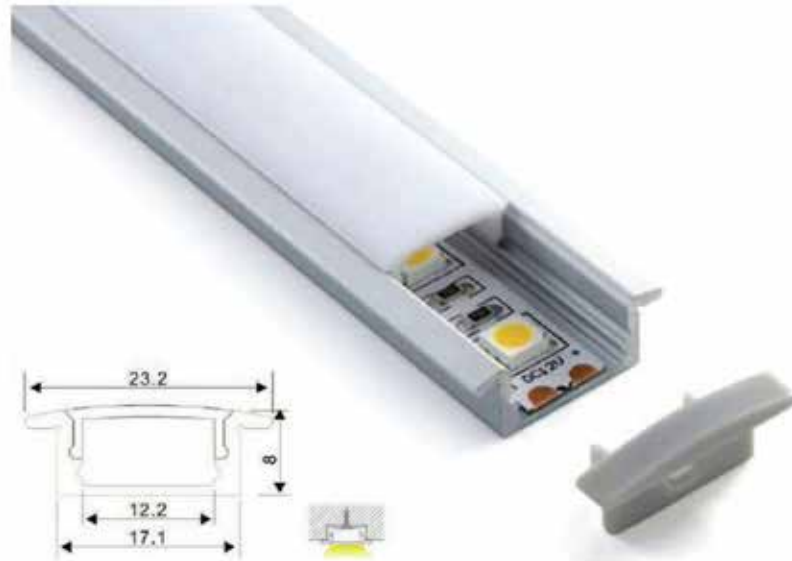

End cap with hole
End cap without hole

74BAPL001EC1
74BAPL001EC0



Aluminum profile

74BAPL001PR



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover

74BAPL0010
74BAPL001ST
74BAPL001T
74BAPL001D




PROFILI 74BAP

74BAPL002




PROFILI 74ALP

74ALP039-30

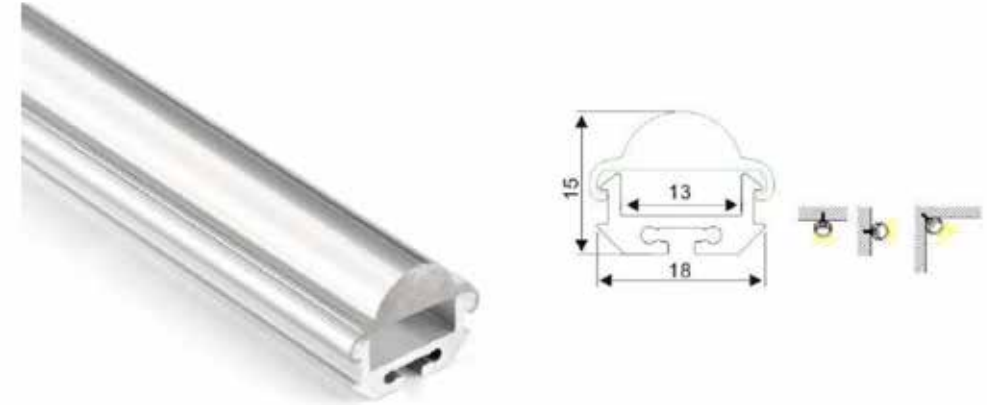

PROFILI PER STRIP 5mm


74S0808

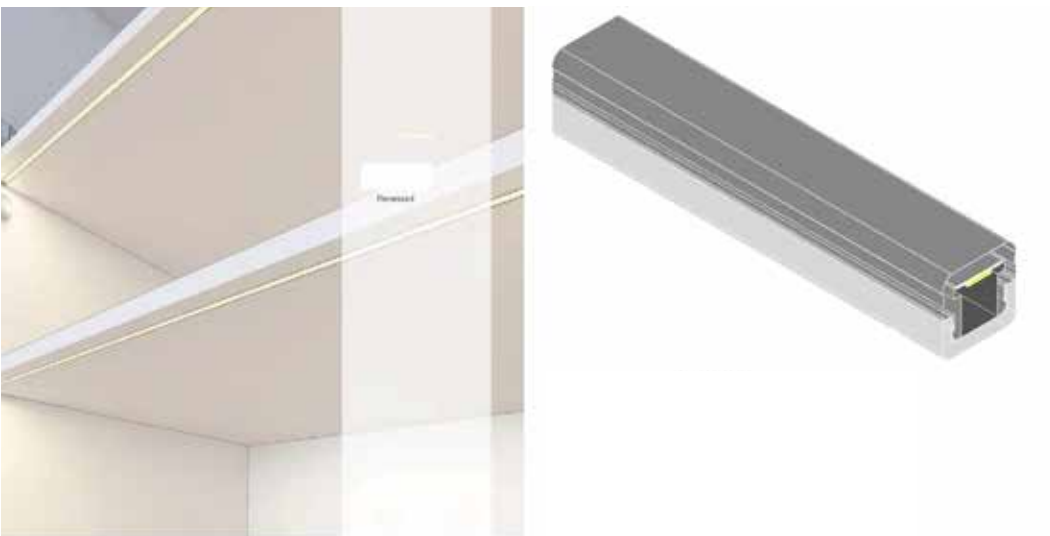

7450808PR1





7450808EC1

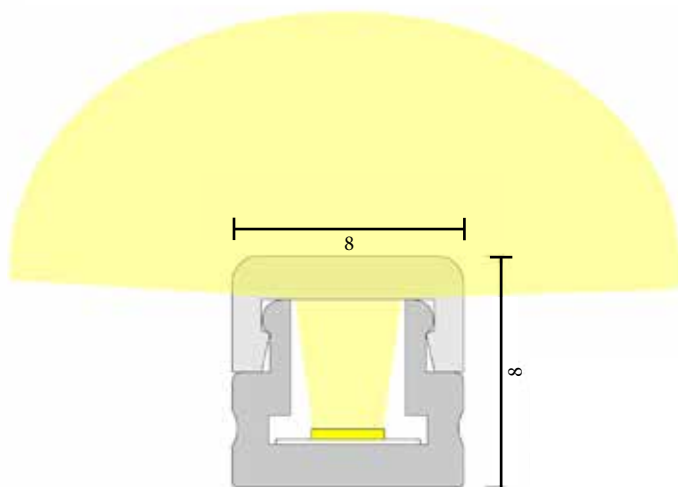

PROFILI PER STRIP 5mm

74S1010

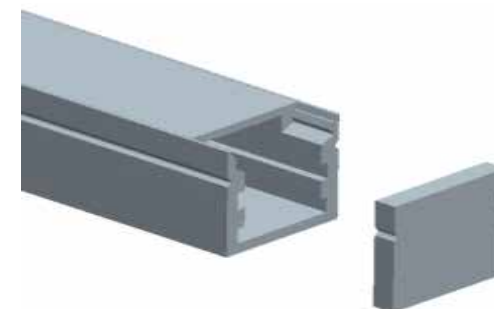

PROFILI 74AP14



Material	AL6063-T5
Surface	Anodized aluminium
PC Cover	Frost/Transparent/Milk
Range width	Within 12mm
Available length	0.5m~2.5m
Installation	Surface mounted with screw or clip

● Applications

Lighting, Indoor LED lighting, Furniture LED Lighting, Store shelf LED Lighting Window display LED Lighting, Exhibition booth LED Lighting Cove LED Lighting, Bias LED Lighting

74AP14F



Frost,AP14F

74AP14T





Transparent,AP14T

74AP14M





Milk,AP14M

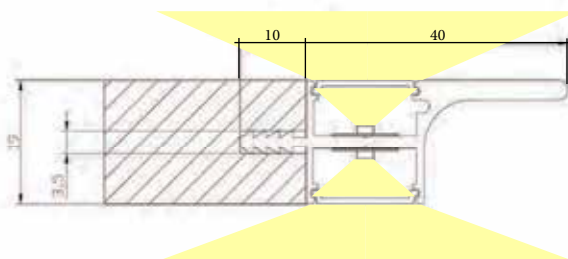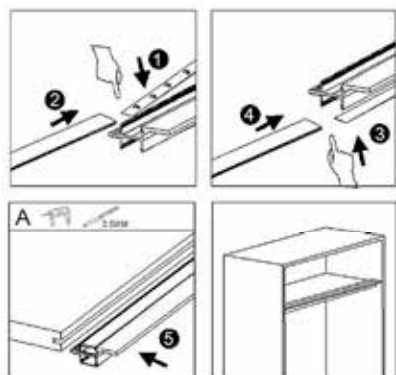


PROFILO PER MENSOLA

74BAPMENSOLA

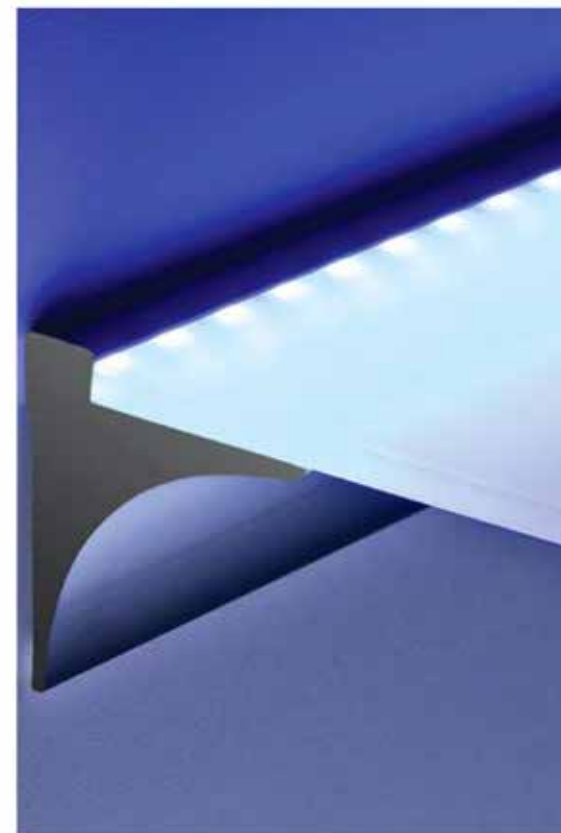

PROFILI 74BAP

74BAPL011
74BAPL011TEST
74BAPL011EC1

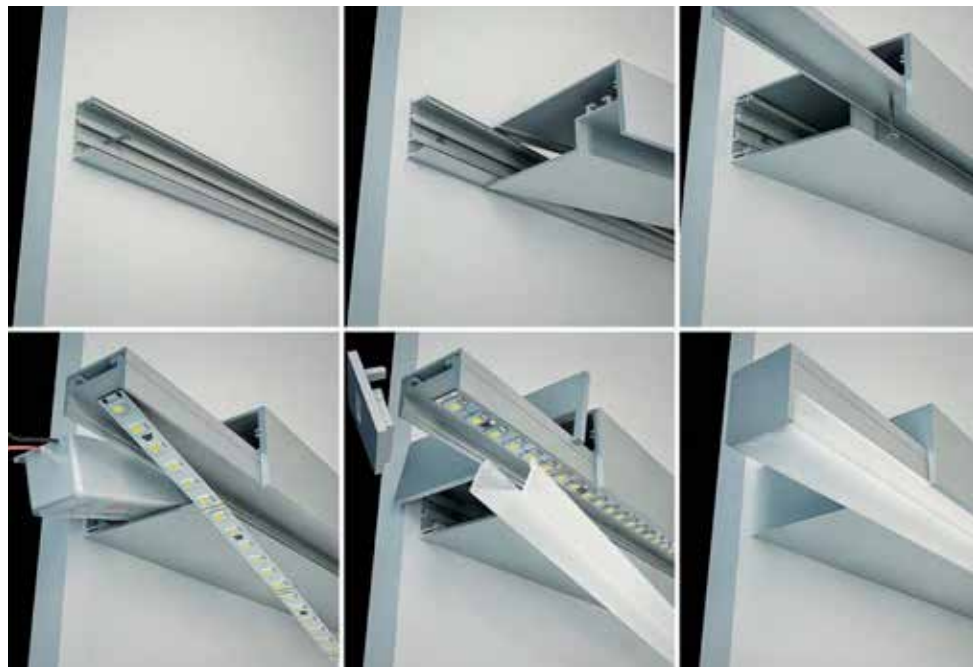

PROFILI 74BAP

74BAPL005



PROFILI 74BAP

74BAPL006



End cap with hole
End cap without hole
74BAPL006EC1
74BAPL006EC0



Aluminum profile
74BAPL005PR



PMMA opal matte cover
PMMA semi-clear cover
PC diffused cover
74BAPL0060
74BAPL006ST
74BAPL006D



Mounting clip(metal)
74BAPL005MCM
74BAPL005MCM



Mounting clip(PC)
74BAPL005PR



PROFILI 74BAP

74BAPL013



End cap with hole
End cap without hole

74BAPL013EC1
74BAPL013EC0



Aluminum profile
74BAPL013PR



PMMA opal matte cover
PMMA semi-clear cover
PC diffused cover

74BAPL0130
74BAPL013ST
74BAPL013D


PROFILI 74BAP

74BAPL014



End cap with hole
End cap without hole

74BAPL014EC1
74BAPL014EC0




Aluminum profile
74BAPL014PR



PMMA opal matte cover
PMMA semi-clear cover
PC diffused cover

74BAPL0130
74BAPL013ST
74BAPL013D




Mounting clip(metal)

74BAPL014MCM


PROFILI 74BAP

74BAPL015

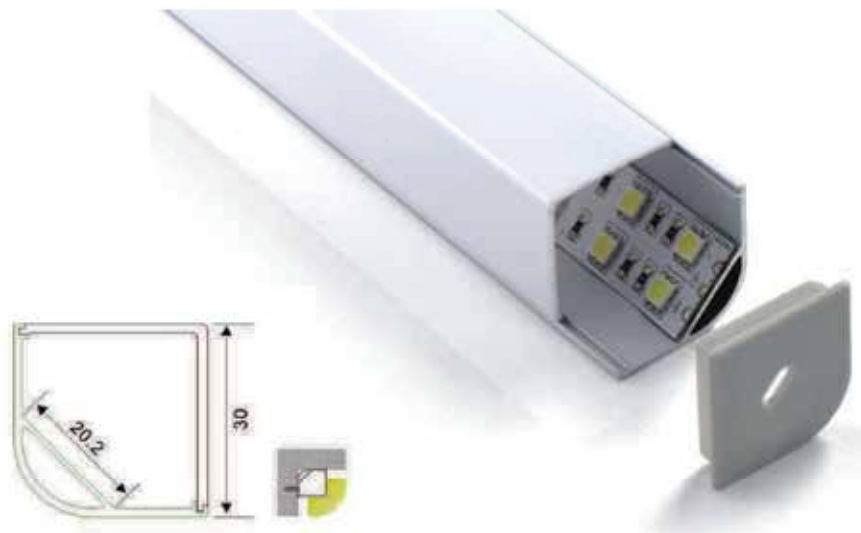

End cap with hole
End cap without hole

74BAPL015EC1
74BAPL015EC0



Aluminum profile
74BAPL015PR



PMMA opal matte cover
PMMA semi-clear cover

74BAPL0150
74BAPL015ST



Mounting clip (metal)

74BAPL015MCM


PROFILI 74BAP

74BAPL016




PROFILI 74BAP

74BAPL011

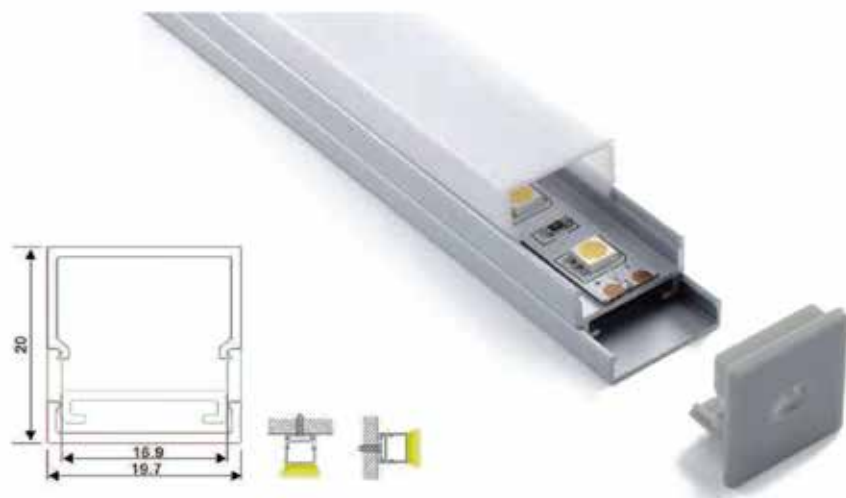


PROFILI 74BAP

74BAPL018

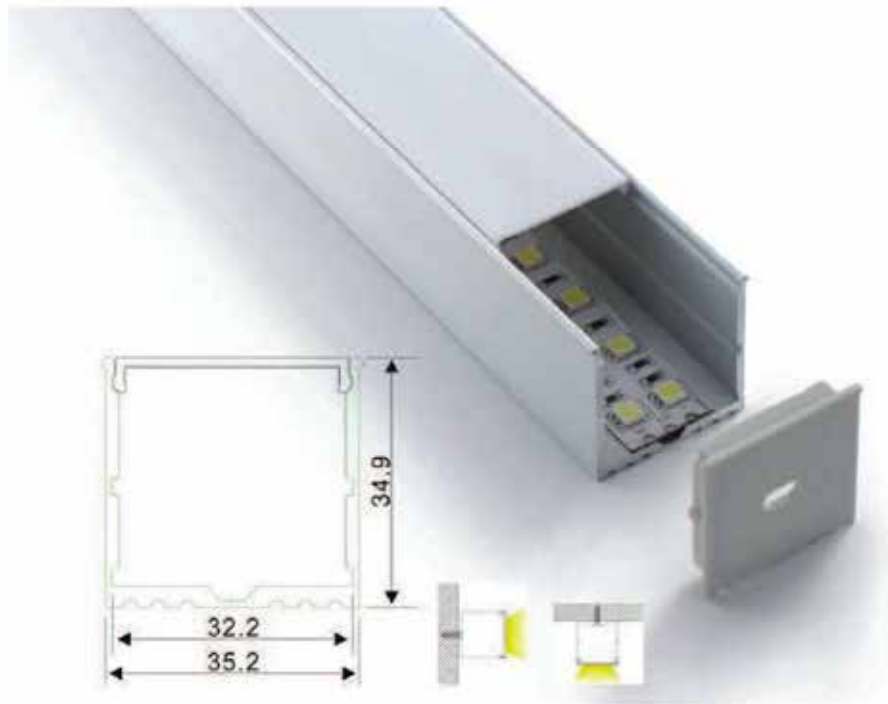


PROFILI 74BAP

74BAPL017

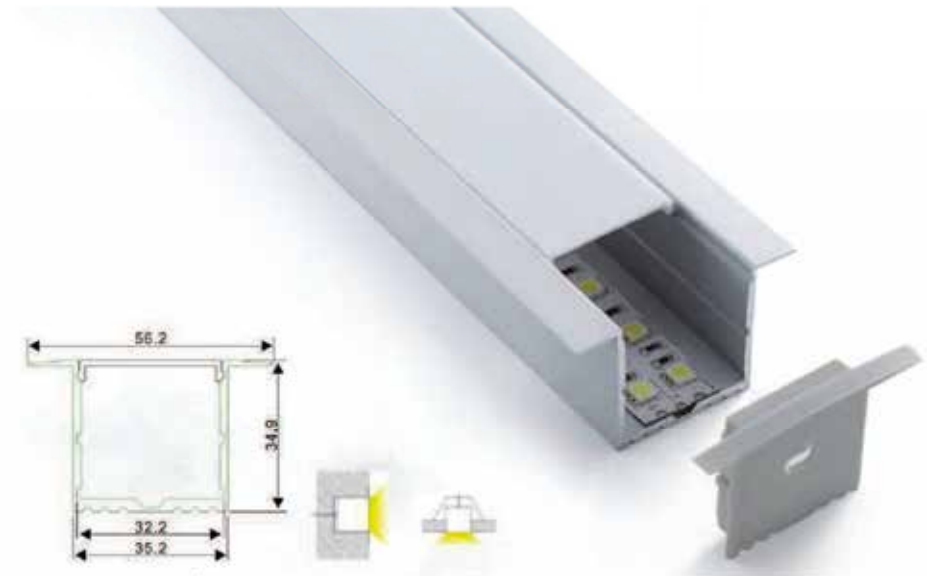

PROFILI 74ALP045R



PC diffused cover

74ALP045RDC



Aluminium End Cap
without hole

74ALP045RECO



Aluminium profile


74ALP045RPR



Stainless Clip

74ALP045RSC

PROFILI 74ALP045RD

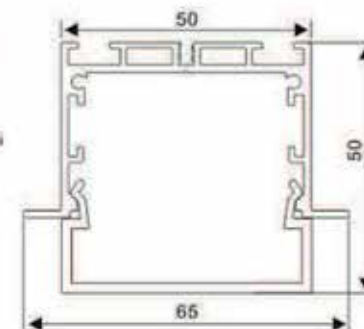

PC Frosted cover

74ALP045RDGH



Aluminium end cap

74ALP045RDEC



Aluminium profile

74ALP045RPR



Stainless Clip

74ALP045RSC




Connector T

74ALP045RDCT



Connector L

74ALP045RDCL



Connector X

74ALP045RDCX




Connector IL

74ALP045RDCIL

PROFILI 74BAP

74BAPL019

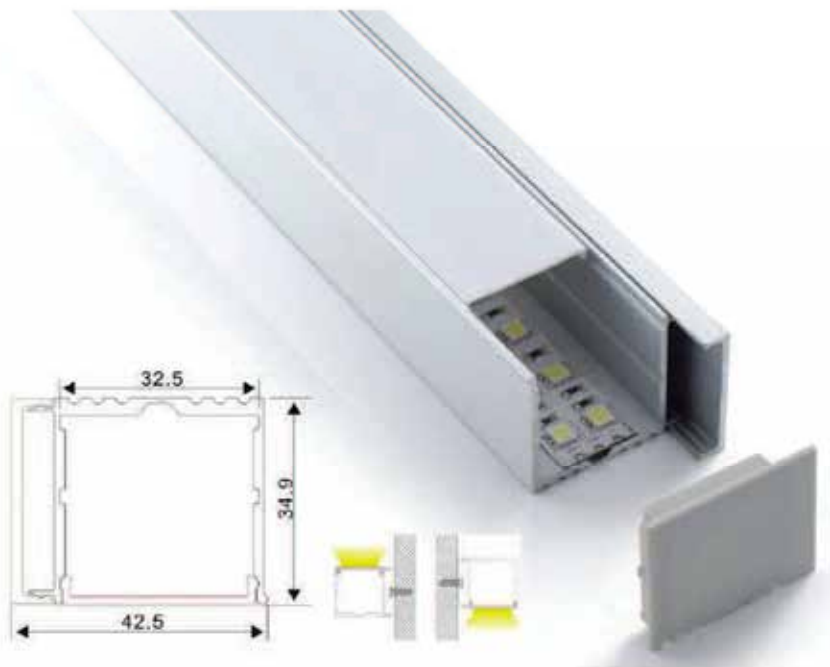

End cap with hole
End cap without hole

74BAPL019EC1
74BAPL019ECO



Aluminum profile

74BAPL019PR



Mounting profile

74BAPL019MP



Aluminum profile for strips

74BAPL019PRS



PMMA opal matte cover
PMMA semi-clear cover
PC diffused cover

74BAPL017O
74BAPL017ST
74BAPL017D



PROFILI 74BAP

74BAPL022



End cap with hole
End cap without hole

74BAPL022EC1
74BAPL022ECO



Aluminum profile

74BAPL022PR



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover

74BAPL0010
74BAPL001ST
74BAPL001T
74BAPL001D



PROFILI 74BAP

74BAPL024



End cap with hole
End cap without hole

74BAPL024EC1
74BAPL024EC0



Aluminum profile

74BAPL024PR





PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover

74BAPL0010
74BAPL001ST
74BAPL001T
74BAPL001D



PROFILI 74BAP

74BAPL023

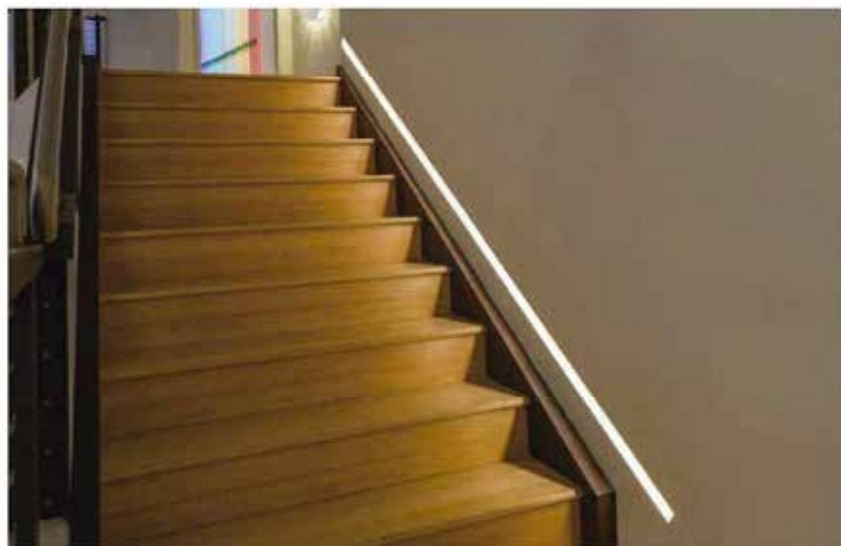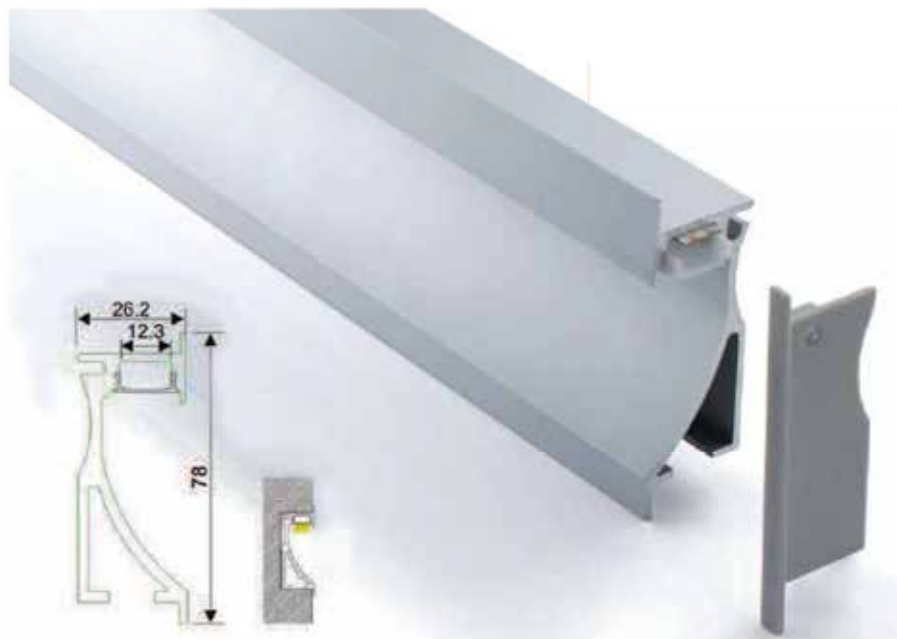

End cap with hole
End cap without hole

74BAPL023EC1
74BAPL023EC0



Aluminum profile

74BAPL023PR



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover

74BAPL0010
74BAPL001ST
74BAPL001T
74BAPL001D



PROFILI 74BAP

74BAPL034



End cap with hole
End cap without hole

74BAPL034EC1
74BAPL034ECO




Aluminum profile

74BAPL034PR



PC diffused cover

74BAPL034D



PROFILI 74BAP

74BAPL009



End cap with hole
End cap without hole

74BAPL009EC1
74BAPL009EC0



Aluminum profile

74BAPL009PR




PMMA opal matte cover

74BAPL009O



PROFILI 74BAP

74BAPL050

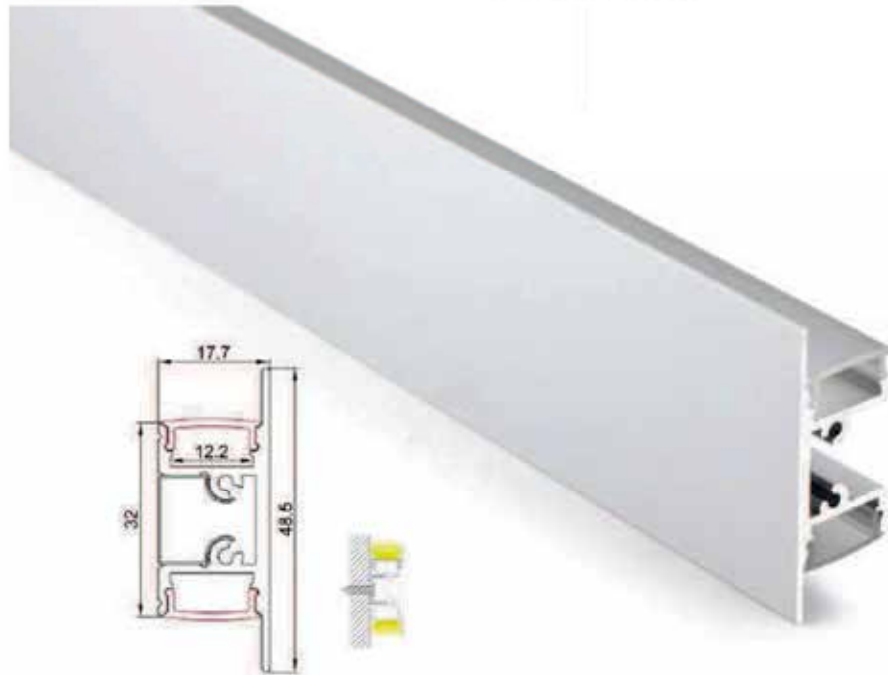

End cap with hole
End cap without hole

74BAPL050EC1
74BAPL050EC0



Aluminum profile

74BAPL050PR



PMMA opal matte cover
PMMA semi-clear cover
PMMA clear cover
PC diffused cover

74BAPL0010
74BAPL001ST
74BAPL001T
74BAPL001D



Mounting clip(metal)

74BAPL050MCM

PROFILI 74BAP

74BAPL049



Aluminum profile

74BAPL049PR



PC semi-clear cover
PC diffused cover

74BAPL049ST
74BAPL049D



End cap without hole

74BAPL049ECO



Mounting clip(metal)

74BAPL049MCM



PROFILI 74BAP

74BAPL062



Aluminum profile
74BAPL062PR



Mounting Profile
74BAPL062MP





End cap without hole
74BAPL062ECO



PMMA opal matte cover
PMMA semi clear cover
PC diffused cover
74BAPL0010
74BAPL001ST
74BAPL001D


PROFILI 74BAP

74BAPL063

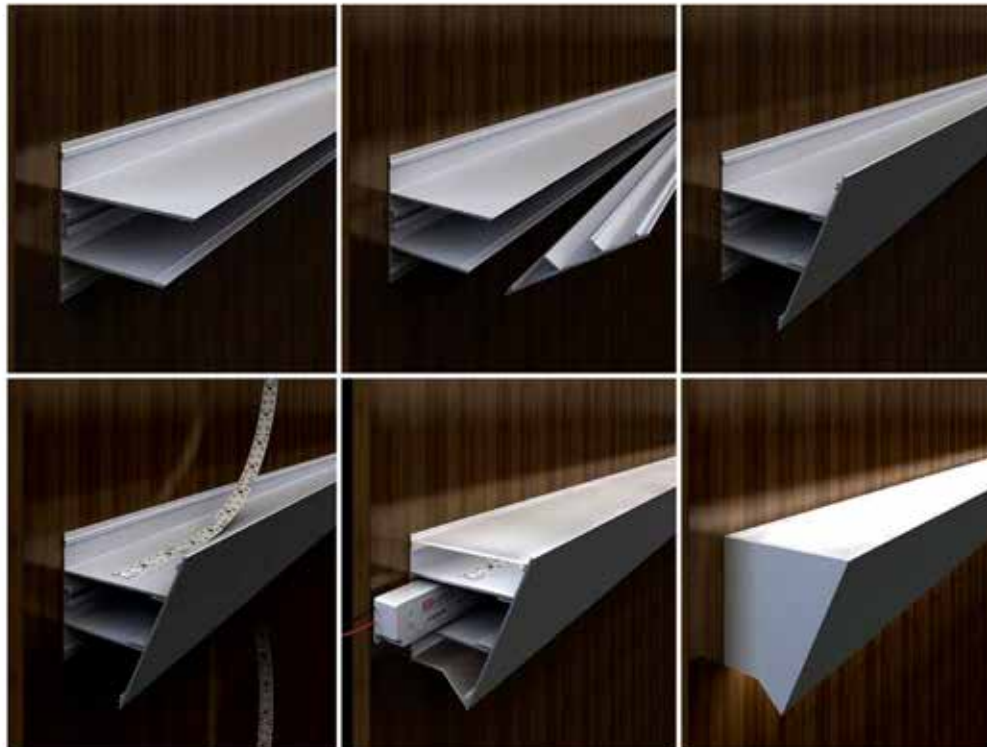


PROFILI 74BAP

74BAPL052

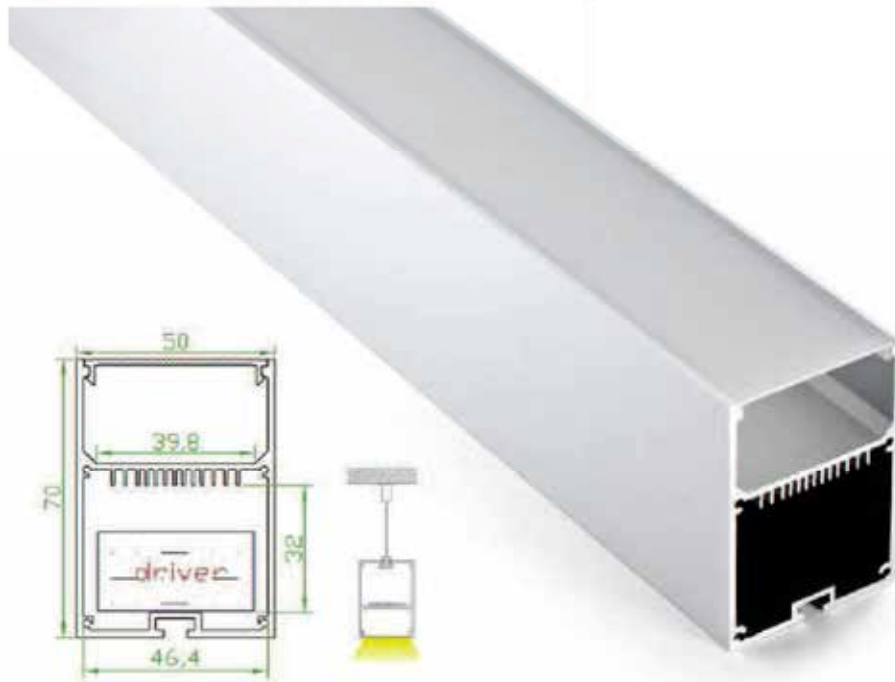

End cap without hole

74BAPL052ECO



Aluminum profile

74BAPL052PR



PC diffused cover (milky)
PC semi-clear cover

74BAPL052ST
74BAPL052D



Suspension wire(2m)

74BAPL052SW



180 degrees connector


74BAPL052DC180



90 degrees connector

74BAPL052DC90

PROFILI 74ALP048R1

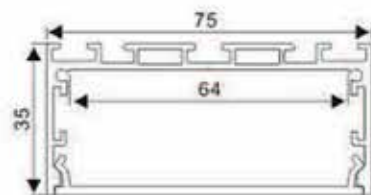

PC diffused cover

74ALP048R1DC



Aluminium End Cap
without hole

74ALP048R1EC0



Aluminium profile



74ALP048R1PR



Stainless Clip

74ALP048R1SC

PROFILI 74ALP048R1D



PC Frosted cover

74ALP048R1DGH



Aluminium end cap

74ALP048R1DEC



Aluminium profile

74ALP048R1PR



Stainless Clip

74ALP048R1SC



Steel wire

74BAPL052SW




Connector T

74ALP048R1DCT



Connector L

74ALP048R1DCL



Connector X

74ALP048R1DCX




Connector IL

74ALP048R1DCIL

PROFILI 74BAP

74BAPL058

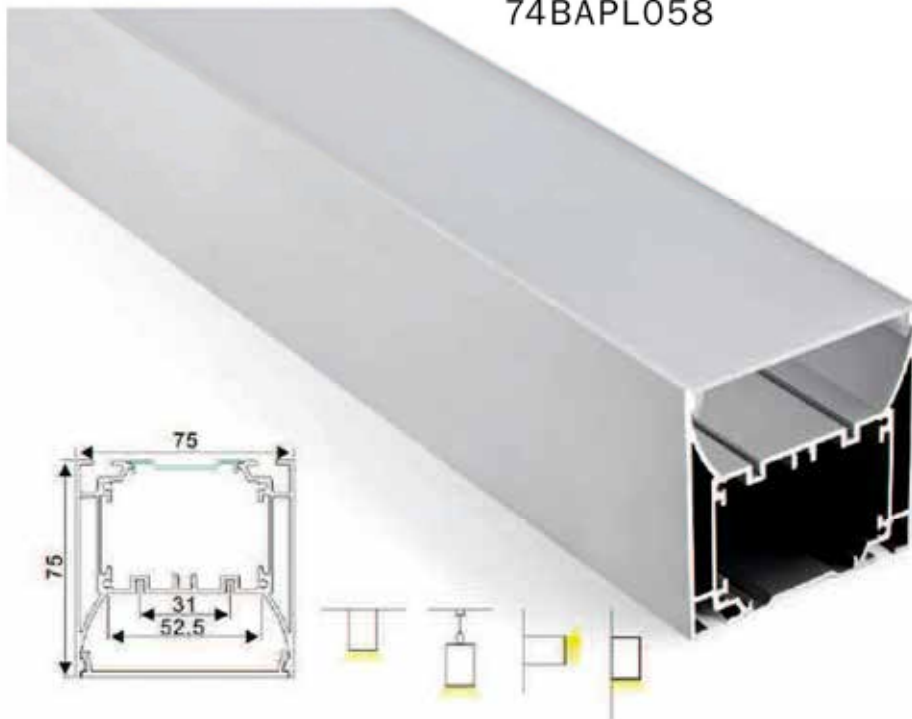

Aluminium profile

74BAPL058PR



PC Frosted cover

74BAPL058GH



LED Module: 2835 LED
42W/1.2M

74BAPL05842W



LED Driver

74BAPL058ALIM



Steel wire

74BAPL052SW



Connector T

74BAPL058CT



Connector L

74BAPL058CL



Connector X

74BAPL058CX



Connector IL

74BAPL058CIL



Stainless Clip

74BAPL058SC




Aluminium End Cap without hole

74BAPL058ECO

PROFILI 74BAP

74BAPL067

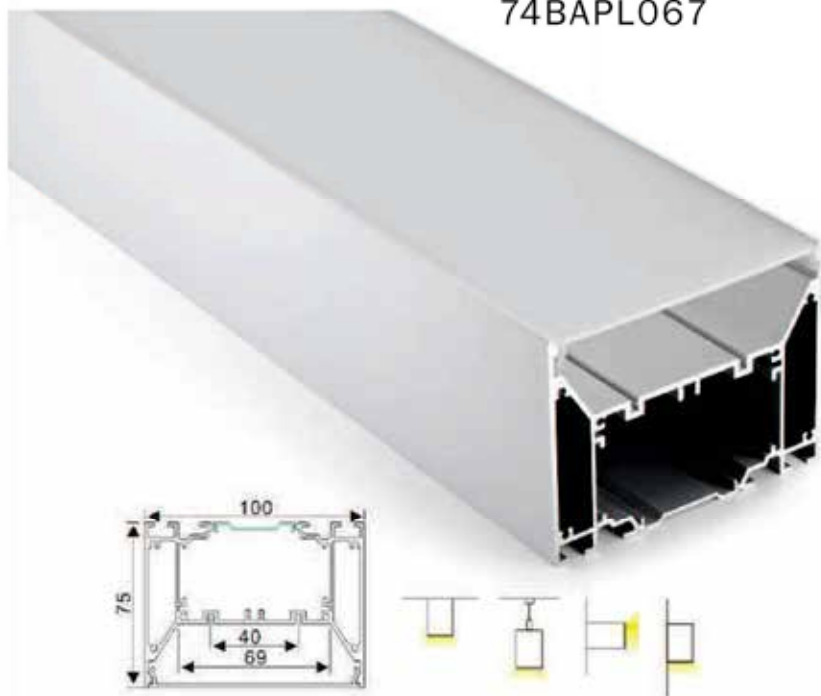

Aluminium profile

74BAPL067PR



PC Frosted cover

74BAPL067GH



LED Module:2835 LED
54W/1.2M

74BAPL06754W



LED Driver

74BAPL058ALIM



Steel wire

74BAPL052SW



Connector T

74BAPL067CT



Connector L

74BAPL067CL



Connector X

74BAPL067CX



Connector IL

74BAPL067CIL



Stainless Clip

74BAPL067SC




Aluminium End Cap without hole

74BAPL067EC0

PROFILI 74BAP

74BAPL054

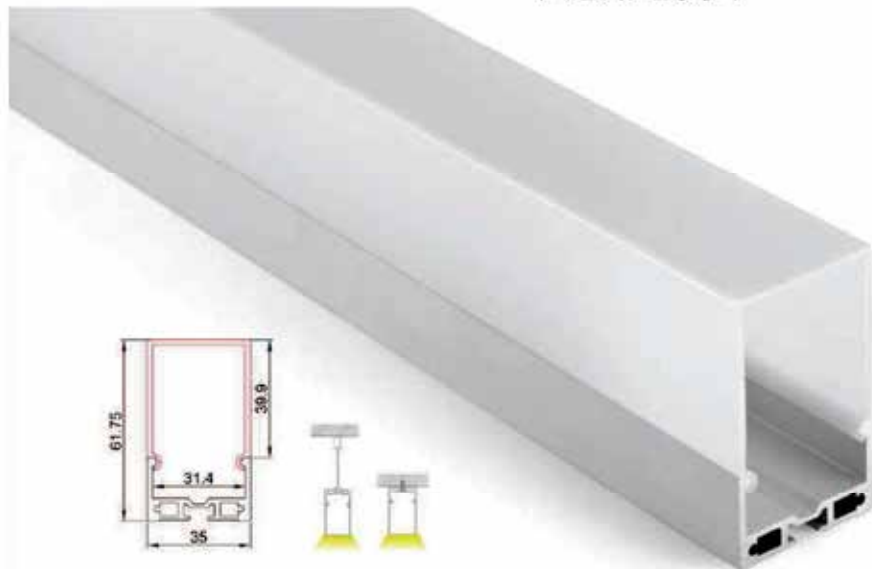

End cap without hole

74BAPL054ECO



Aluminum profile

74BAPL054PR



Suspension wire(2m)

74BAPL052SW




PMMA opal matte cover

74BAPL054O

PROFILI 74BAP

74BAPL056

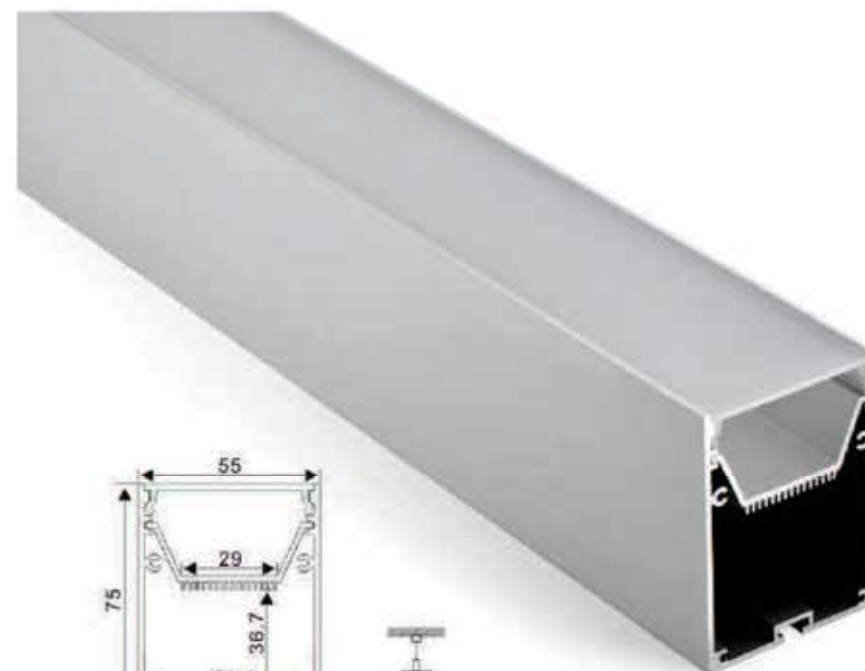

End cap without hole

74BAPL056ECO



Aluminum profile

74BAPL056PR




PC Frosted cover

74BAPL056GH

PROFILI 74BAP

74BAPL056D

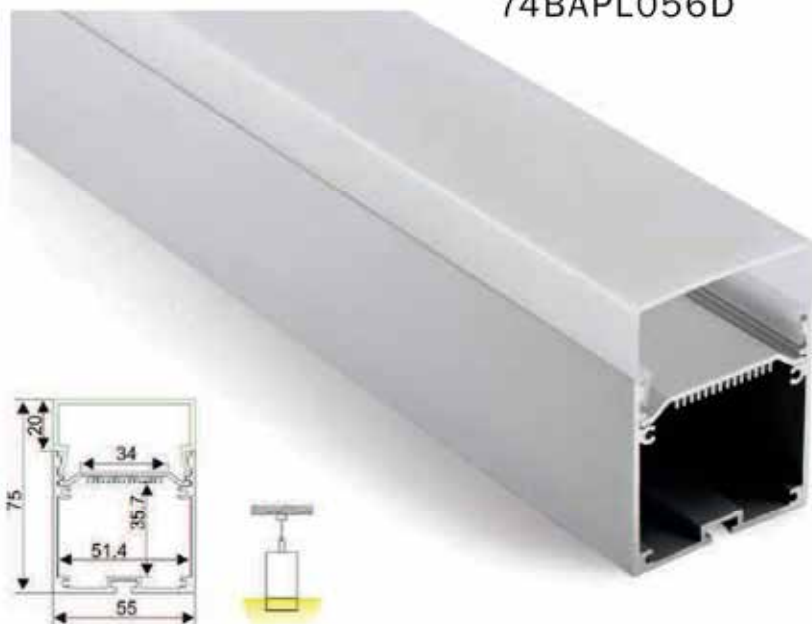

Aluminum profile

74BAPL056DPR



PC Frosted cover

74BAPL056DGH



End cap without hole

74BAPL056ECO



Suspension wire(2m)

74BAPL052SW

LT SERIES

74LT60

74LT100




LT 60

Semplice, stiloso,
aspetto unico:
Cover, trasmittanza luminosa
> 85%

Simple, stylish,
unique appearance;
Imported cover, light
transmittance > 85%




LT 100

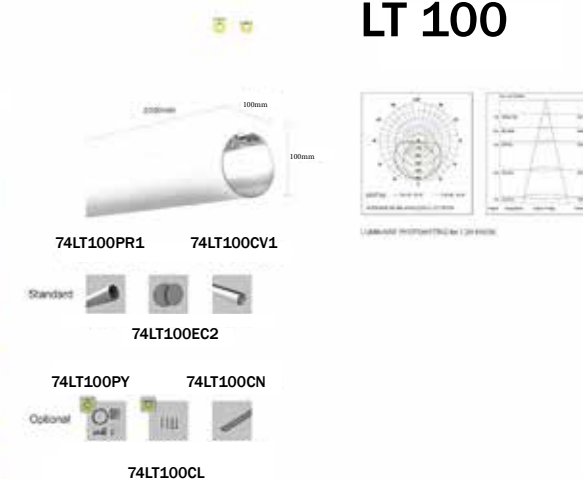

PROFILI 74BAP

74BAPL059

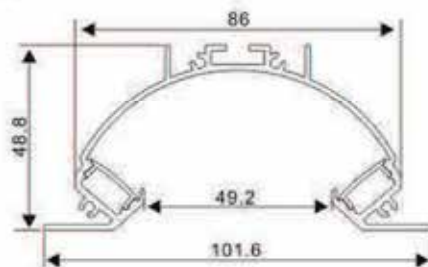

Aluminium profile

74BAPL059PR



PMMA opal matte cover
PMMA semi-clear cover
PC diffused cover

74BAPL0590
74BAPL059ST
74BAPL059D



Aluminium end cap

74BAPL059ECO





Spring Clip

74BAPL059SC

PROFILI 74BAP



74BAPL70100

74BAPL70170

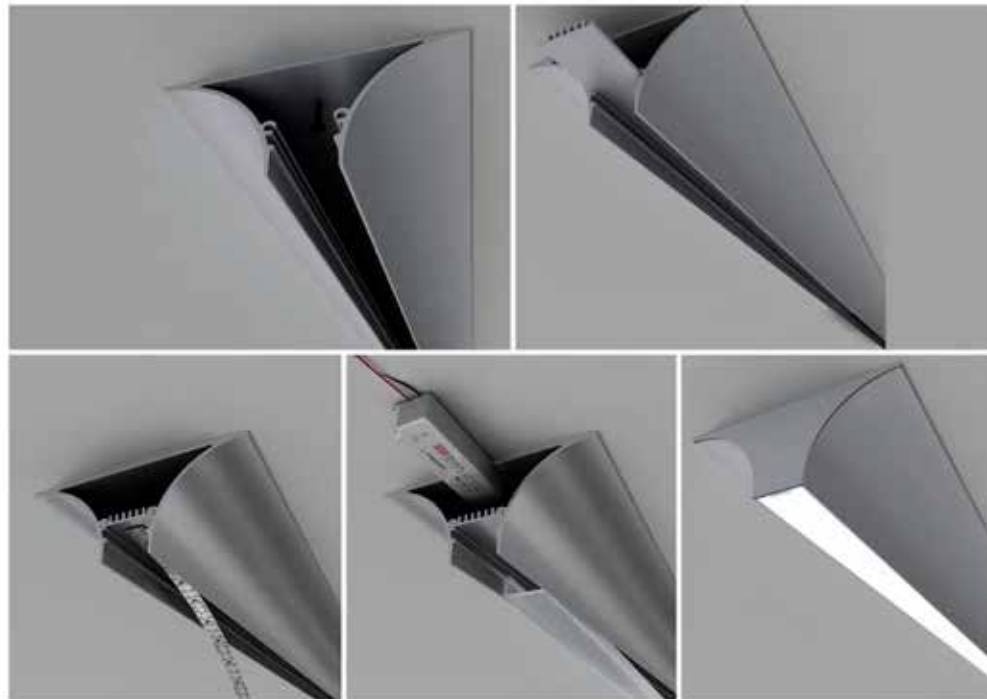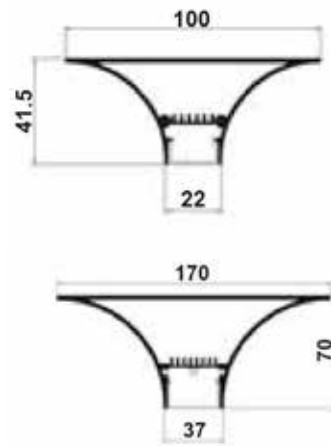

PROFILI 74BAP

74BAPL15023

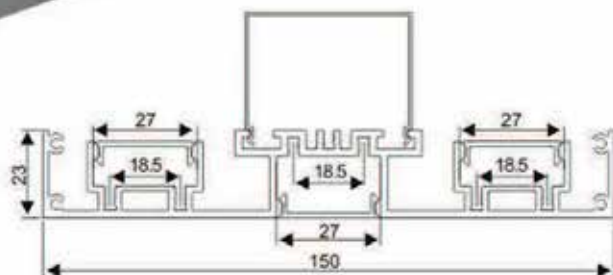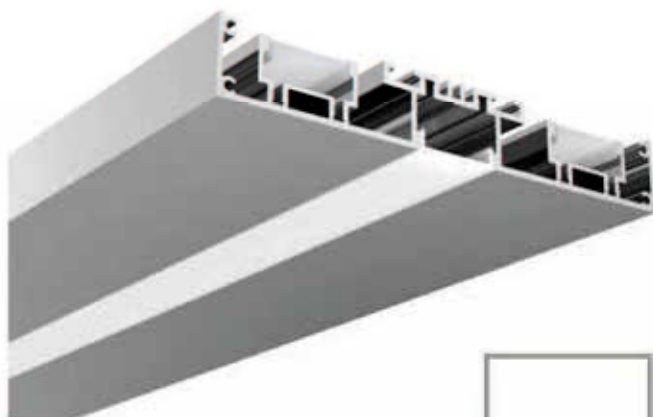

Aluminium profile

74BAPL15023PR



PC Frosted cover

74BAPL15023GH



Aluminium End Cap
without hole

74BAPL15023ECO



Aluminium cover for driver

74BAPL15023AC



LED Module: 2835 LED
84W/1.2M

74BAPL1502384W




Steel wire

74BAPL052SW


NOVITÀ!!!

PROFILI PER CARTONGESSO

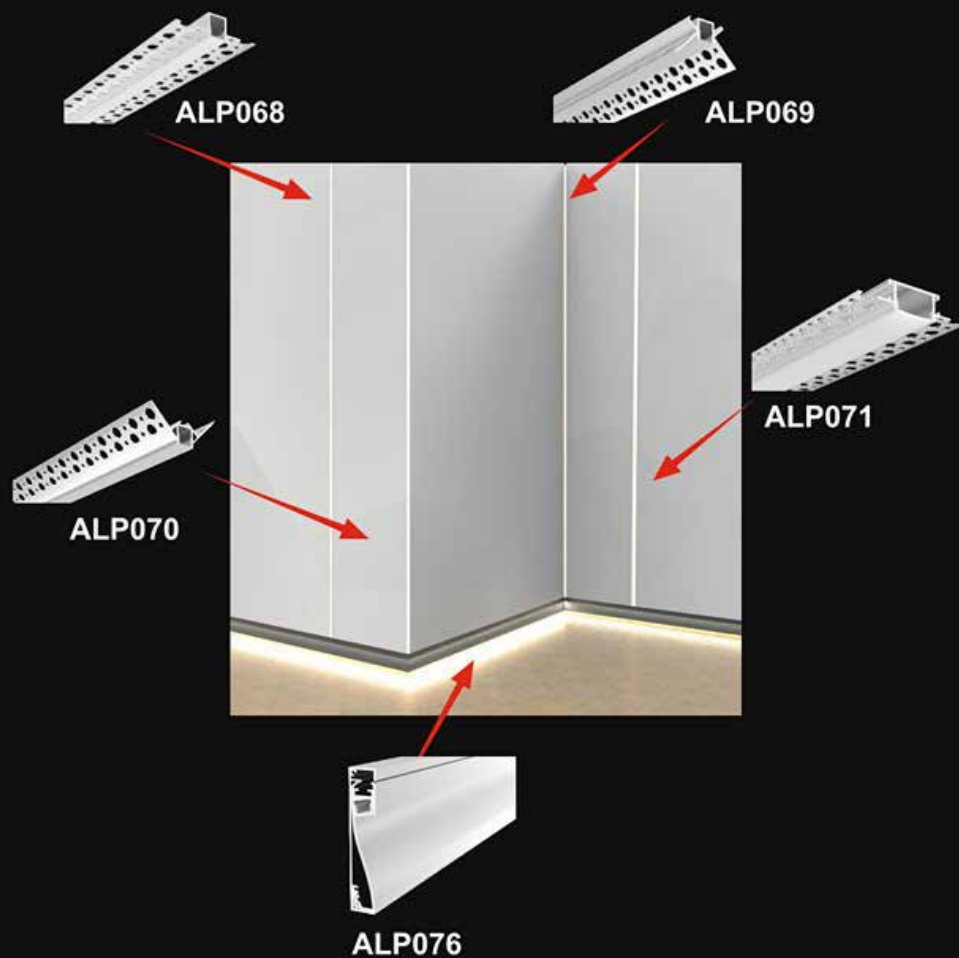


PROFILI 74ALP

74ALP068

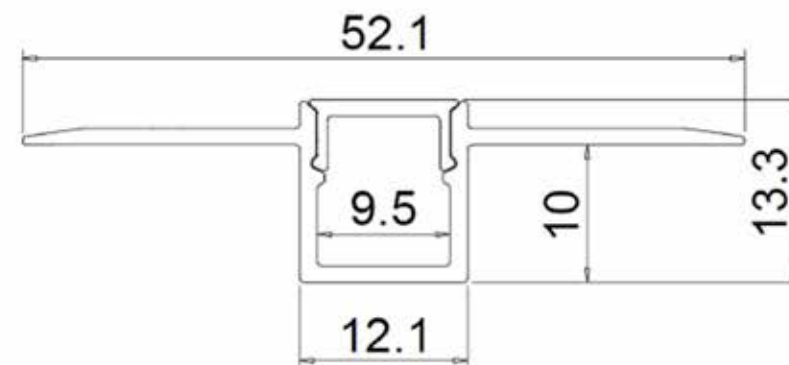


PROFILI 74ALP

74ALP069

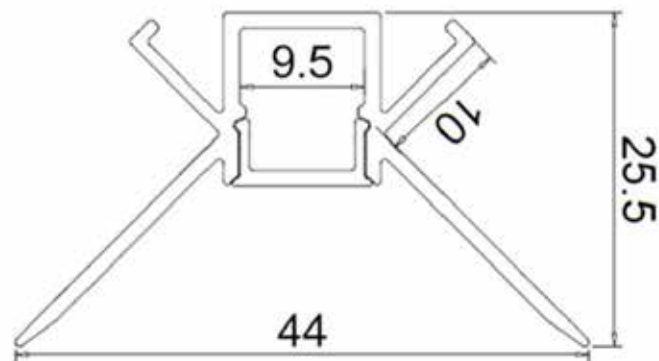



PROFILI 74ALP

74ALP070

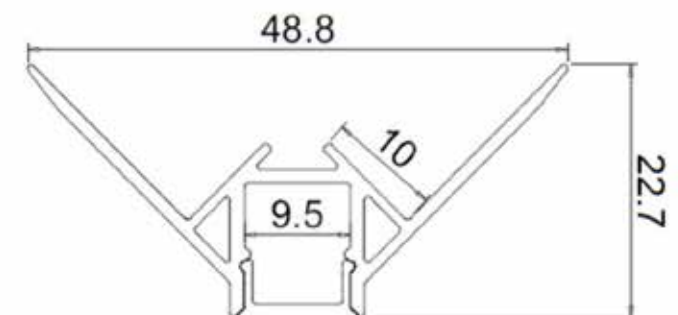


PROFILI 74ALP

74ALP071



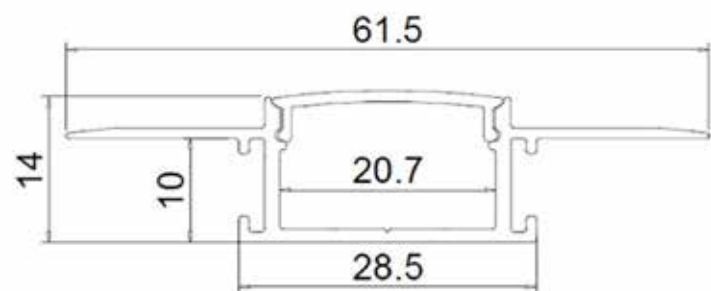
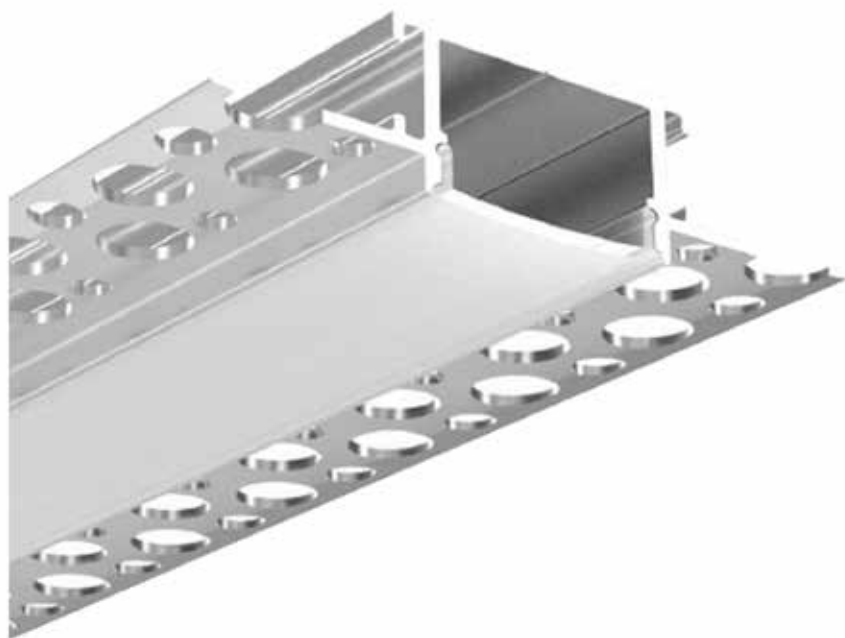


PROFILI 74ALP




74ALP076

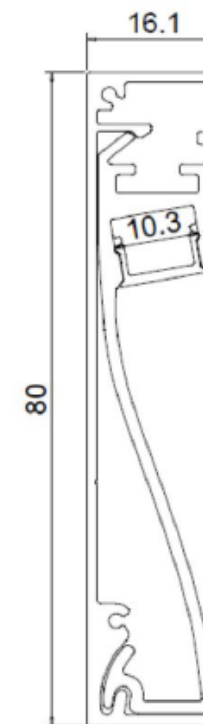







PROFILI 74ALP

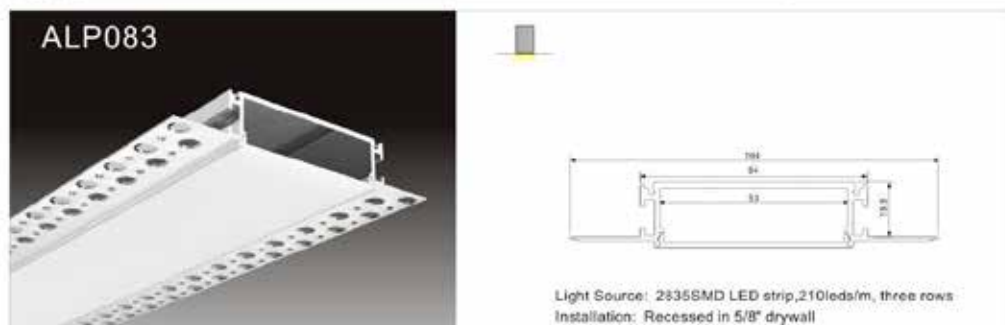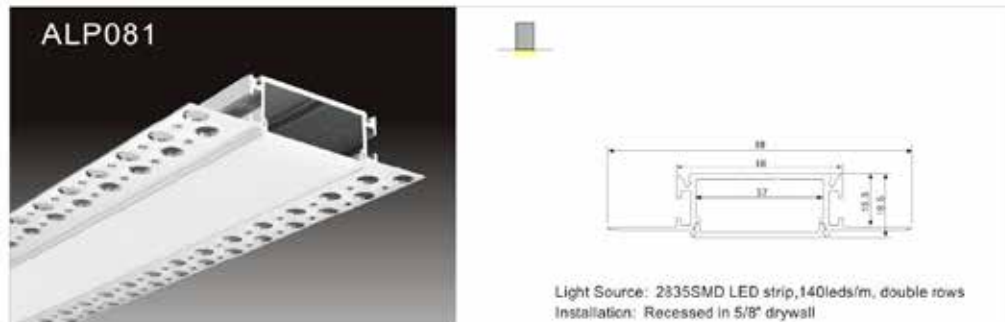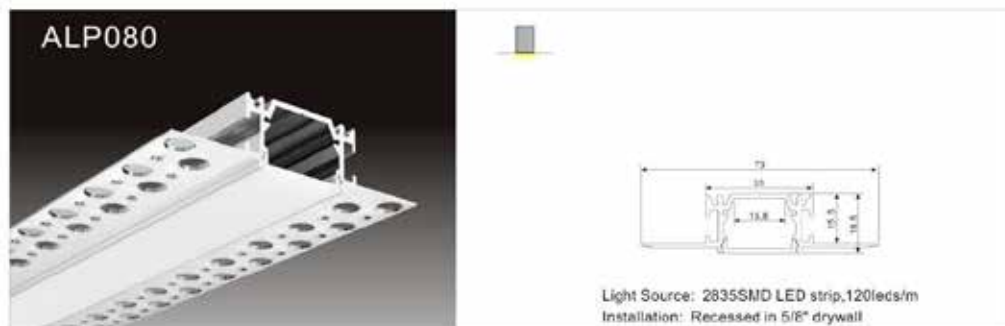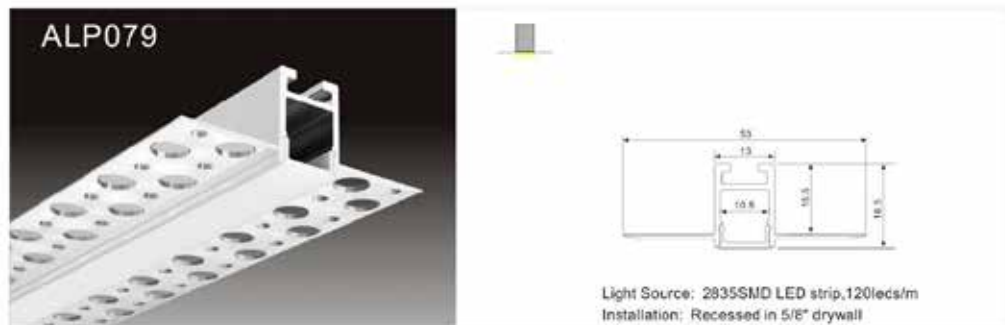


PROFILI 74ALP

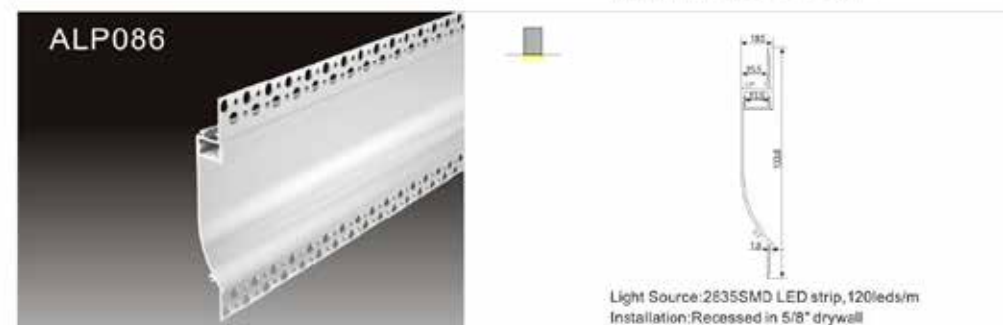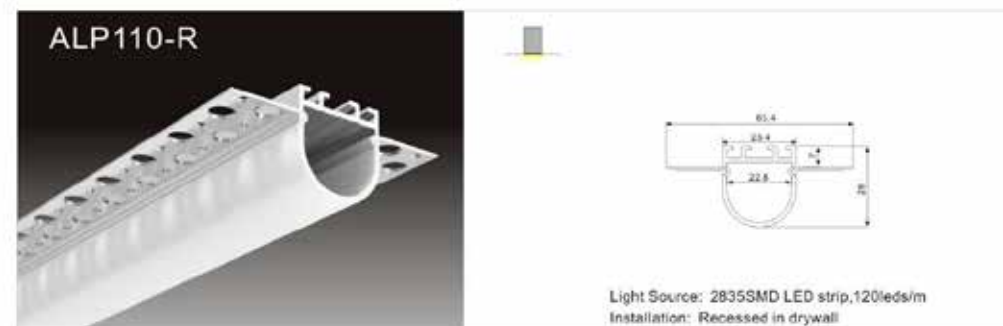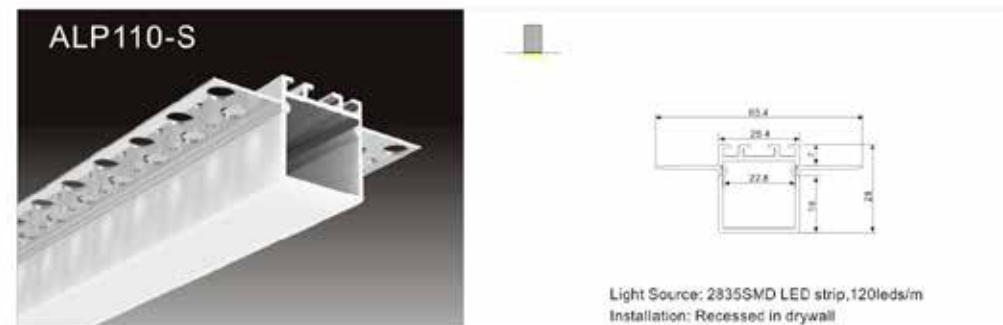


PROFILI 74ALP

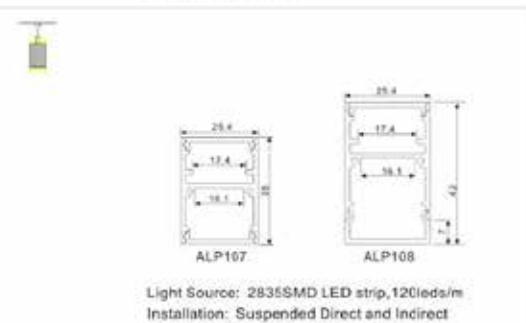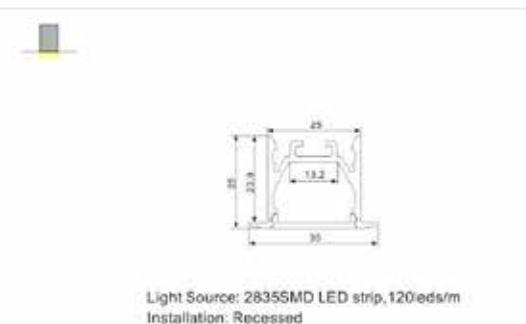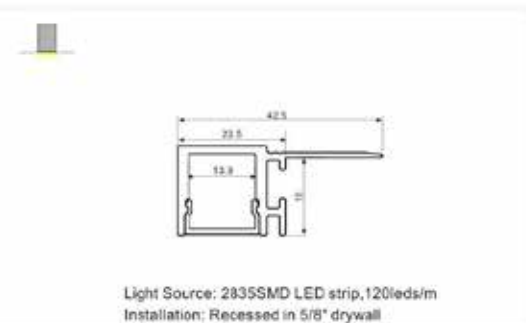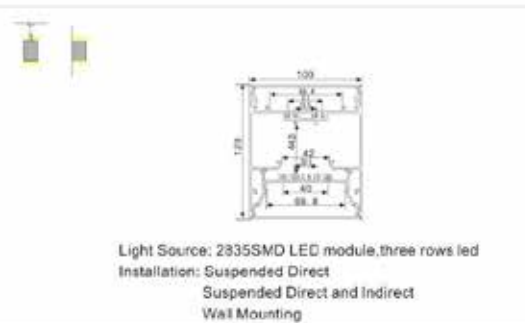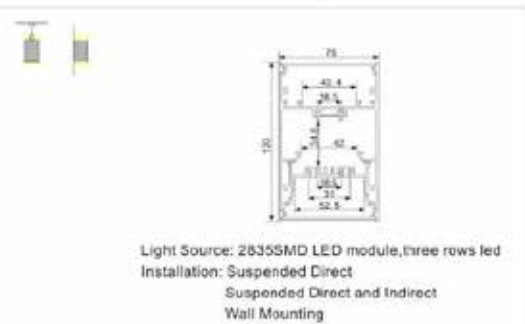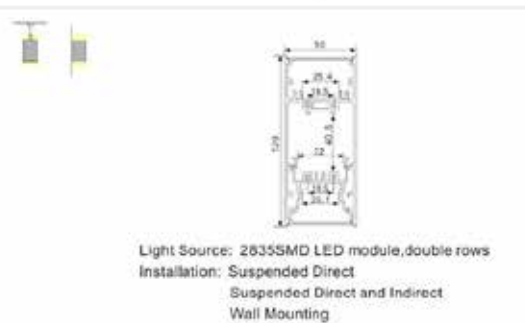



PROFILI 74ALP



Light Source: 5730SMD LED strip,60leds/m
Installation: surface mounting on 1/2" drywall
Indirect Light




Light Source: 5730SMD LED strip, 60leds/m
Installation: surface mounting on 5/8" drywall
as cove light

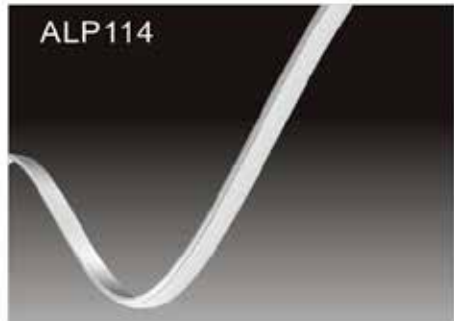

Light Source: 2835SMD LED strip, 120leds/m
Installation: surface mounting or suspended
Bendable

CILINDRO

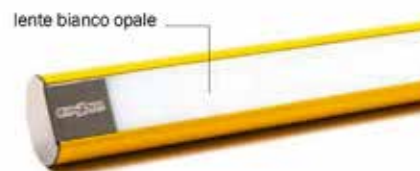

CILINDRO

74LC...



CILINDRO

Cilindro un brevetto tutto italiano!!!

La potenza luminosa led/metro varia a seconda delle necessità: da 5W, 9W, 15W e 17.4W. **Cilindro** è integrabile con sistema RGB. La tensione di funzionamento è di 12v. Temperatura colore bianco caldo da 2000/3500°K mentre in bianco naturale 4000/5000°K. **Cilindro** è fornito di cavo da 1,50 mt e necessita di un alimentatore (trasformatore) da 12v a corrente continua.

Dimensioni

Il profilo in alluminio è disponibile fino ad una lunghezza massima di 4 metri mentre la lente mono opalina raggiunge un massimo di 3 metri. Questa caratteristica offre una completa libertà di progettazione.

Cilindro NO LED Anod. Bianco/Corten (colore su richiesta)

Cilindro_5W

Codice	Watt	IP	Colore
74LC5WANN	5W	40	Alluminio anodizzato
74LC5WAR	5W	40	Arancione
74LC5WRO	5W	40	Rosso
74LC5WB	5W	40	Bianco
74LC5WV	5W	40	Verde
74LC5WC	5W	40	Corten
74LC5WN	5W	40	Nero
74LC5WCH	5W	40	Cromo

Cilindro_12W

Codice	Watt	IP	Colore
74LC12WANN	12W	40	Alluminio anodizzato
74LC12WAR	12W	40	Arancione
74LC12WRO	12W	40	Rosso
74LC12WB	12W	40	Bianco
74LC12WV	12W	40	Verde
74LC12WC	12W	40	Corten
74LC12WN	12W	40	Nero
74LC12WCH	12W	40	Cromo

Codice 74LC


Cilindro_15W

Codice	Watt	IP	Colore
74LC15WANN	15W	40	Alluminio anodizzato
74LC15WAR	15W	40	Arancione
74LC15WRO	15W	40	Rosso
74LC15WB	15W	40	Bianco
74LC15WV	15W	40	Verde
74LC15WC	15W	40	Corten
74LC15WN	15W	40	Nero
74LC15WCH	15W	40	Cromo

Cilindro_17W

Codice	Watt	IP	Colore
74LC17WANN	17W	40	Alluminio anodizzato
74LC17WAR	17W	40	Arancione
74LC17WRO	17W	40	Rosso
74LC17WB	17W	40	Bianco
74LC17WV	17W	40	Verde
74LC17WC	17W	40	Corten
74LC17WN	17W	40	Nero
74LC17WCH	17W	40	Cromo

CILINDRO ACCESSORI

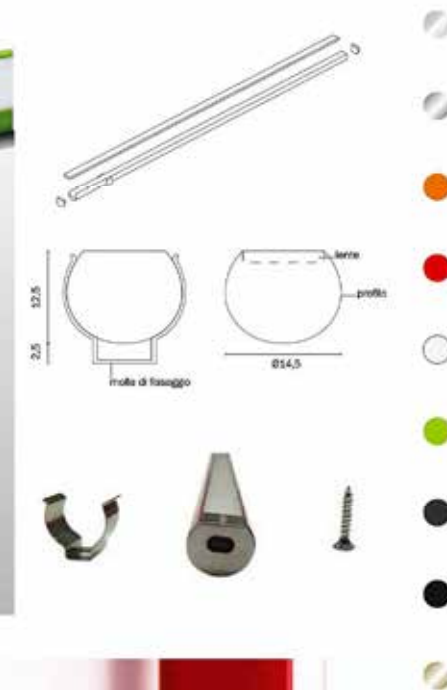

ASOLA POLIPROPILENE
74LGRAPP



GRAFFIA ALLUMINIO
74LGRAC



BUSSOLA
74LBUS140



INTERRUTTORE ON/OFF
74APAK056AS



CILINDRO



CILINDRO






CILINDRO



Wellness

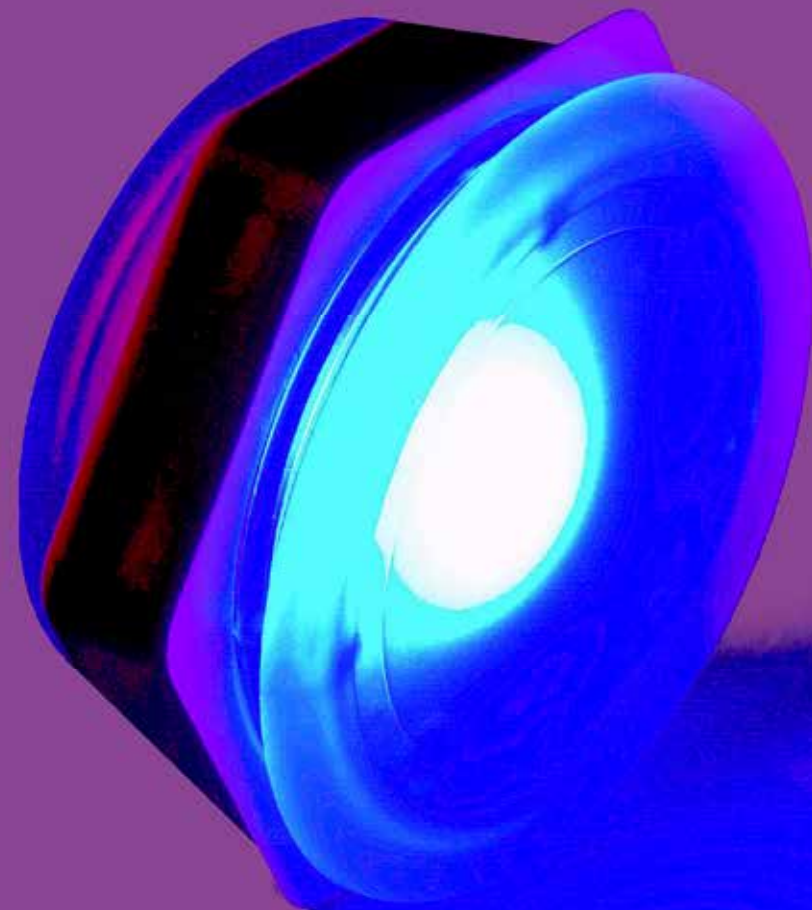

SPOT LED

94F001L1040



Color	(W)	(V)	(LM)	(K)	(KG)	Beam Angle (°)
Ottone-Chrome	0,5	24	40	3000	0,15	40°

SPOT LED

94F005E230002



Color	(W)	(A)	(LM)	(K)	(KG)	Beam Angle (°)
Argento-Silver	1x1	350mA	120	4000	0,08	120°

94F013E114002



Color	(W)	(A)	(LM)	(K)	(KG)	Beam Angle (°)
Silver	3x1	350 mA	360	4000	0,12	120°

EYE LED

104A10006RGB



1W	12V DC	IP67	ø30mm x 14,5mm
----	--------	------	----------------






TRACK ACCESSORI

124SK150CM2H
124SK150CM4H

Track light_2wire

Binario da 150mm nelle colore bianco e nero.

124SK150CM2H



Live/End



124SKC2E

I - Coupler



124SKC2I

L - Coupler



124SKC2L

T - Coupler



124SKC2T

X - Coupler



124SKC2X

Installazione



Track light_4wire

Binario da 150mm nelle colore bianco e nero. Sistema europeo.

124SK150CM4H



Live/End



124SKC4E

I - Coupler



124SKC4I

L - Coupler



124SKC4L

T - Coupler



124SKC4T

X - Coupler



124SKC4X

Installazione



LED SPOTLIGHT

LED Spotlight



Installation



Hook



ceiling mounted



ceiling mounted

Track(rail) System



2-wire(Japan)



3-wire(USA)



4-wire(European)

Fixed beam angle select



Oval flood



Four leaf barndoor(Optional)



Housing Colors




LED IMAGE PROJECTOR

LED Image Projector



Logo projection

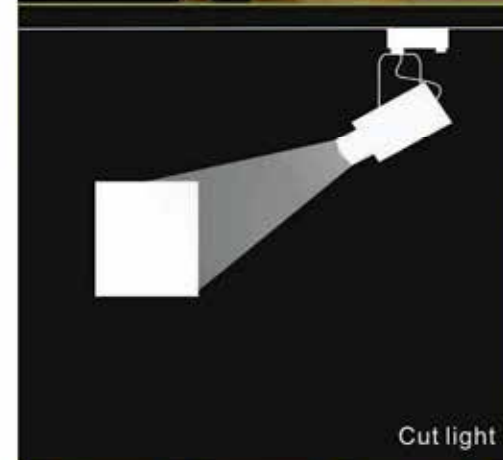

Cut light



Cut light profile as your wish



LED SPOTLIGHT

124DALI
124CCT

DALI Track Lighting



DALI track system

CCT Track Lighting






LED IMAGE PROJECTOR

124SDG001



Model No.	SDG-001
Power Consumption	30W/40W(RGBW)/60W
Operational Voltage	AC85V-265V
Color Temperature	2700K-5000K
CRI	Min>80
Intensity of Light Output	3000lm~4200lm
Gobo size	E size
Beam Angle	15° /25° /35°
Color	White or RGBWDMX)
Rating	IP 44

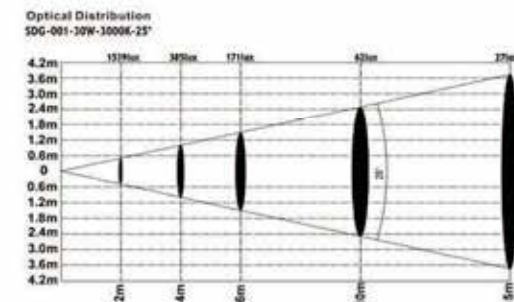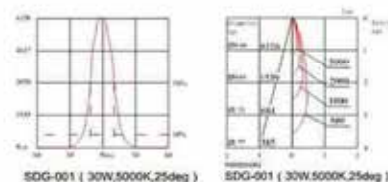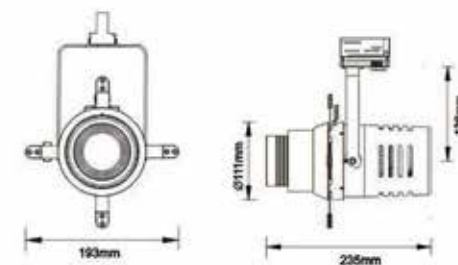


LED IMAGE PROJECTOR




124SDG002



Model No.:	SDG-002
Power Consumption	30W/40W(RGBW)/60W
Operational Voltage	AC85V~265V
Color Temperature	2700K~5000K
CRI	Min>80
Intensity of Light Output	3000lm~4200lm
Gobo size	E size
Beam Angle	12° ~ 18°
Color	White or RGBW(DMX)
Rating	IP 44

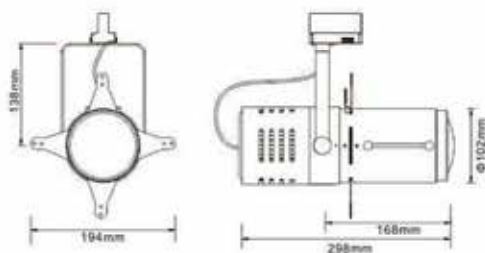


Optical Distribution
SDG-002 (30W, 5000K, 18deg)

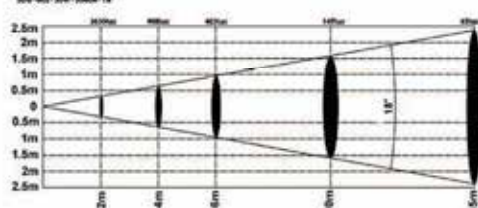


LED IMAGE PROJECTOR

124SDG003
124SDG004

Model No.:	SDG-003
Power Consumption	30W/40W(RGBW)/60W
Operational Voltage	AC85V~265V
Color Temperature	2700K~5000K
CRI	Min>80
Intensity of Light Output	3000lm~4200lm
Gobo size	E size D size
Beam Angle	12° ~ 18° 15° ~ 35° (DMX)
Color	White or RGBW(DMX)
Rating	IP 65

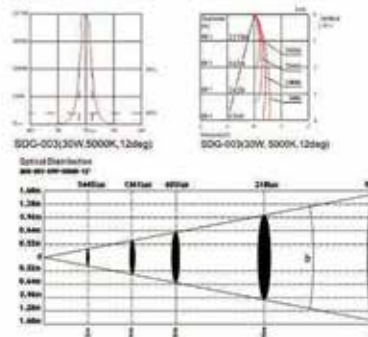


Model No.:	SDG-004
Power Consumption	100W
Operational Voltage	AC85V~265V
Color Temperature	2700K~5000K
CRI	Min>80
Intensity of Light Output	8800lm~9300lm
Gobo size	G size
Beam Angle	15° ~ 35°
Color	White or RGBW(DMX)
Rating	IP 65

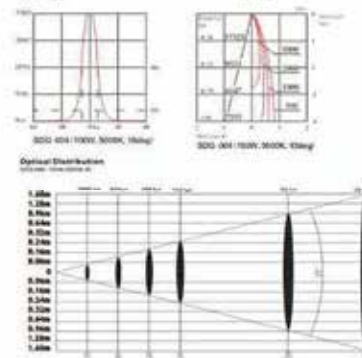

LED RECESSED DOWNLIGHT


124SDR037K
124SDR038K

Model No.:	SDR-037K
Power Consumption	15W/20W/30W
Operational Voltage	AC85V~265V
Color Temperature	2700K~5000K
CRI	Min>80
Beam Angle Range	24° ~ 60°
Intensity of Light Output	1000lm~2900lm
Driver	Include
Expected Life	50,000 hours
Rating	IP 44



Turn Angle from 24° - 60°

Model No.:	SDR-038K
Power Consumption	20W/30W/45W
Operational Voltage	AC85V~265V
Color Temperature	2700K~5000K
CRI	Min>80
Beam Angle Range	24° ~ 60°
Intensity of Light Output	1900lm~5000lm
Driver	Include
Expected Life	50,000 hours
Rating	IP 44




Turn Angle from 24° - 60°

LED RECESSED DOWNLIGHT


124SDR039K
124SDR040K

Model No.:	SDR-039K
Power Consumption	45W/70W
Operational Voltage	AC85V~265V
Color Temperature	2700K~5000K
CRI	Min>80
Beam Angle Range	24° ~ 60°
Intensity of Light Output	4700lm~7100lm
Driver	Include
Expected Life	50,000 hours
Rating	IP 44



Turn Angle from 24° - 60°

Model No.:	SDR-040K
Power Consumption	45W/70W
Operational Voltage	AC85V~265V
Color Temperature	2700K~5000K
CRI	Min>80
Beam Angle Range	24° ~ 60°
Intensity of Light Output	4700lm~7100lm
Driver	Include
Expected Life	50,000 hours
Rating	IP 44




Turn Angle from 24° - 60°


LED SPOTLIGHT

124SDS018
124SDS018K

Model No.:	SDS-018
Power Consumption	45W/70W
Operational Voltage	AC85V-265V
Color Temperature	2700K-5000K
CRI	Min>80
Beam Angle Range	15° / 26° / 44°
Intensity of Light Output	4700lm-7100lm
Driver	Include
Expected Life	50,000 hours
Rating	IP 44

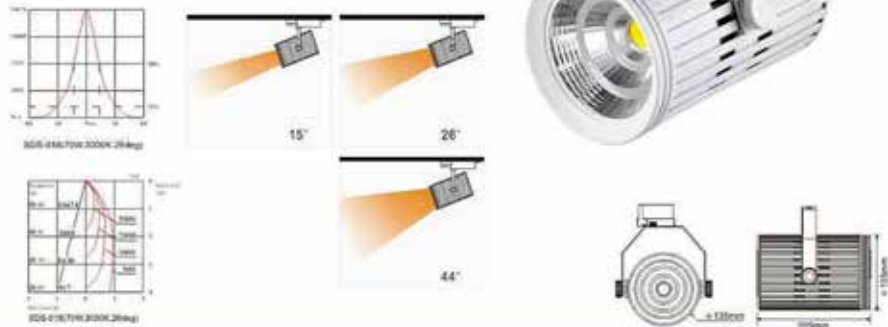


Model No.:	SDS-018K
Power Consumption	45W/70W
Operational Voltage	AC85V-265V
Color Temperature	2700K-5000K
CRI	Min>80
Beam Angle Range	26° ~ 60°
Intensity of Light Output	4700lm-7100lm
Driver	Include
Expected Life	50,000 hours
Rating	IP 44

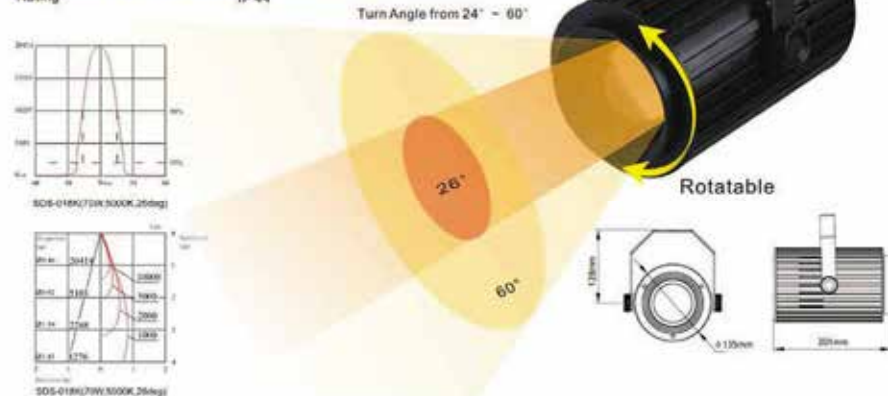


LED SPOTLIGHT

124SDS022K
124SDS023

Model No.:	SDS-022K
Power Consumption	20W/30W
Operational Voltage	AC85V-265V
Color Temperature	2700K-5000K
CRI	Min>80
Beam Angle Range	24° ~ 60°
Intensity of Light Output	1900lm-2900lm
Driver	Include
Expected Life	50,000 hours
Rating	IP 44

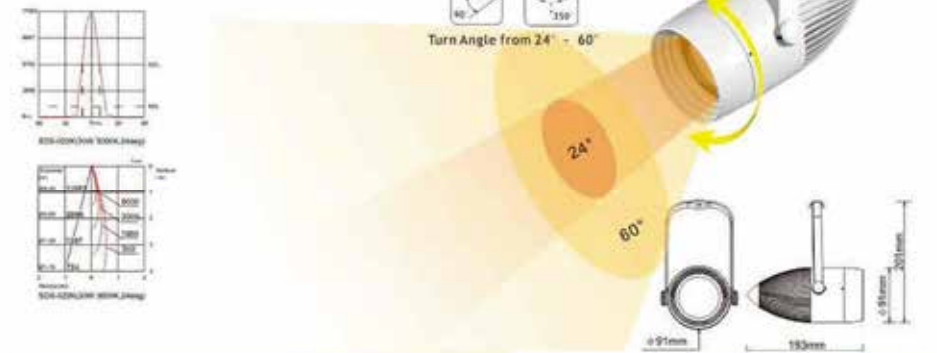


Model No.:	SDS-023
Power Consumption	30W/45W
Operational Voltage	AC85V-265V
Color Temperature	2700K-5000K
CRI	Min>80
Beam Angle Range	24° ~ 60°
Intensity of Light Output	2700lm-5000lm
Driver	Include
Expected Life	50,000 hours
Rating	IP 44

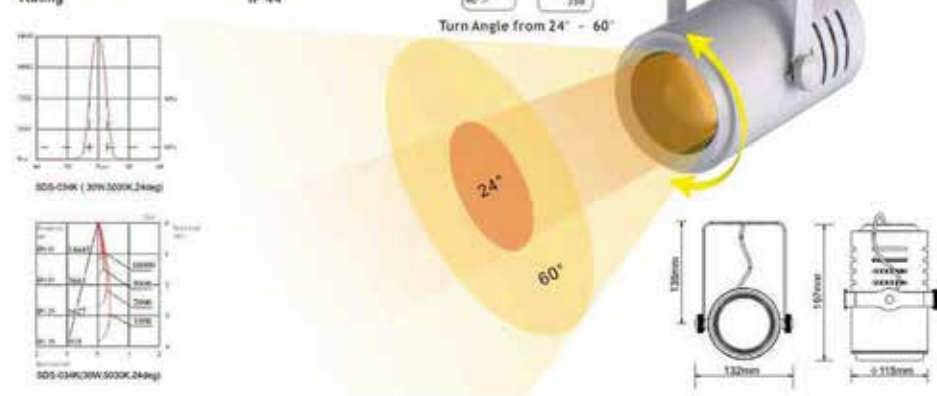


LED SPOTLIGHT

124SDS024
124SDS025K

Model No.:	SDS-024
Power Consumption	15W/20W
Operational Voltage	AC85V~265V
Color Temperature	2700K~5000K
CRI	Min>80
Beam Angle Range	15° / 26° / 38° / 44°
Intensity of Light Output	1000lm~2100lm
Driver	Include
Expected Life	50,000 hours
Rating	IP 44

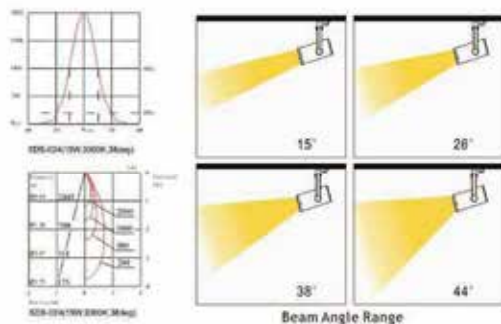


Model No.:	SDS-025K
Power Consumption	8W/15W
Operational Voltage	AC85V~265V
Color Temperature	2700K~5000K
CRI	Min>80
Beam Angle Range	24° ~ 60°
Intensity of Light Output	540lm~1200lm
Driver	Include
Expected Life	50,000 hours
Rating	IP 44




LED SPOTLIGHT

124SDS022
124SDS030K

Model No.:	SDS-022
Power Consumption	20W/30W
Operational Voltage	AC85V~265V
Color Temperature	2700K~5000K
CRI	Min>80
Beam Angle Range	15° / 26° / 38° / 44°
Intensity of Light Output	1900lm~2900lm
Driver	Include
Expected Life	50,000 hours
Rating	IP 64

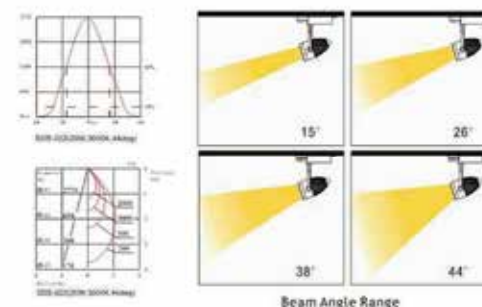


Model No.:	SDS-030K
Power Consumption	30W/45W
Operational Voltage	AC85V~265V
Color Temperature	2700K~5000K
CRI	Min>80
Beam Angle Range	24° ~ 60°
Intensity of Light Output	2700lm~5000lm
Driver	Include
Expected Life	50,000 hours
Rating	IP 44





LED SPOTLIGHT

124SDS029
124SDS038K

Model No.:	SDS-029
Power Consumption	40W
Operational Voltage	AC85V~265V
Color Temperature	2700K~5000K
CRI	Min>80
Beam Angle Range	15° / 26° / 38° / 44°
Intensity of Light Output	2800lm~4200lm
Driver	Include
Expected Life	50,000 hours
Rating	IP 44

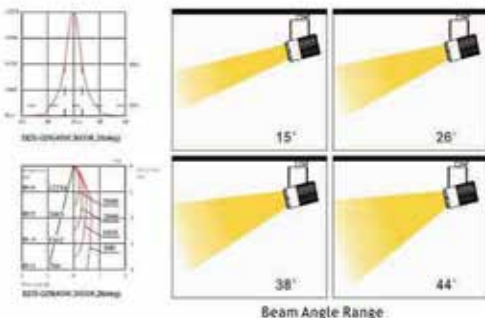

Model No.:	SDS-038K
Power Consumption	30W/45W
Operational Voltage	AC85V~265V
Color Temperature	2700K~5000K
CRI	Min>80
Beam Angle Range	24° ~ 60°
Intensity of Light Output	2700lm~5000lm
Driver	Include
Expected Life	50,000 hours
Rating	IP 44

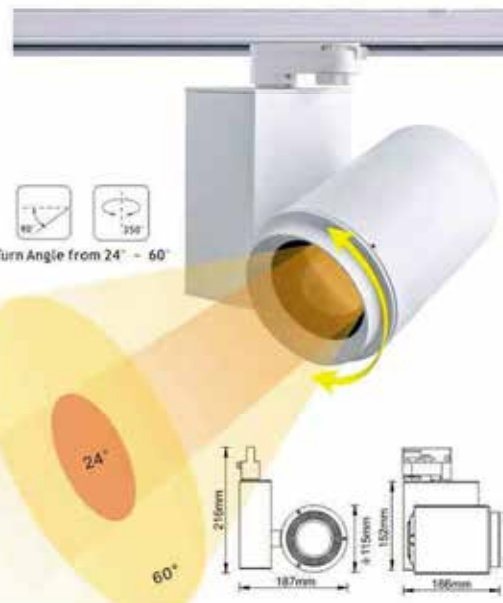



LED SPOTLIGHT

124SDS040K



Turn Angle from 24° ~ 60°

Model No.:	SDS-040K
Power Consumption	15W/20W/30W
Operational Voltage	AC85V~265V
Color Temperature	2700K~5000K
CRI	Min>80
Beam Angle Range	24° ~ 60°
Intensity of Light Output	1000lm~2900lm
Driver	Include
Expected Life	50,000 hours
Rating	IP 44

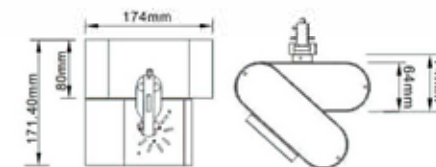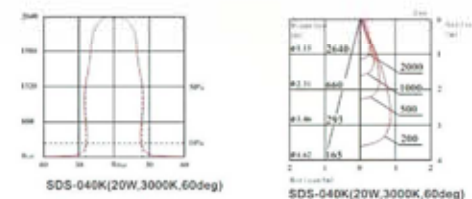



Esterni

EYE LED

104A10006
104A10006RGB




DESCRIZIONE

Eye led facile da installare, incassato calpestabile con tecnologia a LED, per attività commerciali come ristoranti, negozi, stabilimenti, luoghi di intrattenimento, teatri, hotel.

VANTAGGI

- Il design rivoluzionario permette agli specialisti della pavimentazione una facile installazione
- L'incasso del faretto richiede uno spessore minimo del pavimento di soli 7mm
- Lunga durata fino a 30,000 ore che equivale a 10 anni, se acceso per 8 ore al giorno
- La luce è delicata al tocco, la superficie illuminata non supera mai i 35°C
- I faretti sono disponibili in forma rotonda e quadrata con colori a LED bianco caldo, bianco freddo o blu.

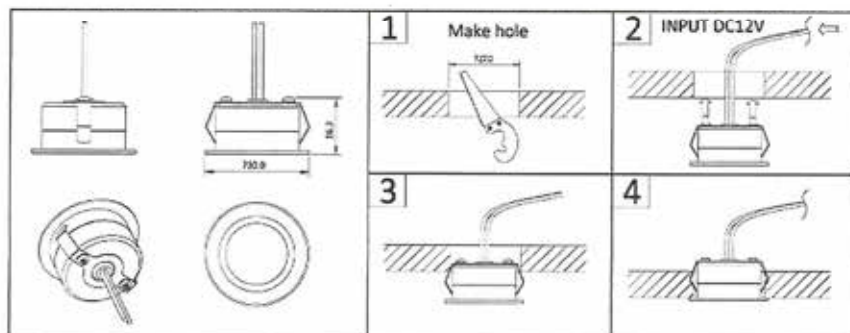

Pat No	Watts	Lumens		Input	Waterproof	Mounting holes	Dimensions
		Warm White	Cool White				
A10006	1W	60 lm	75 lm	12V DC	IP 67	Ø27mm	Ø30x14.5mm
A10006-RGB	1W	R G B					

Note: Colour Temperature: Warm white: 2700K / Nature white: 4000K / Cool white: 6500K CRI>80

SNAP

10430311.003.05
10430312.003.05
10430313.003.02



Snap_1

10430311.003.05

1x3W - Led 700mA 4200K



Snap_2

10430312.003.05

1x3W - Led 700mA 4200K



Snap_3

10430313.003.02

1x3W - Led 700mA 4200K



CE F IP67 ES

LED

SNAP
Snap

Faretto calpestabile con luce direzionata (1, 2 o 3 uscite luminose). Corpo illuminante a led 1x3W 700mA. Struttura in alluminio anodizzato. Disponibile con led tonalità natural white (4200K). Necessita di alimentatore, non incluso.

COVER

10430301.003.05
10430302.003.05
10430303.003.02
10460300.001



05



COVER

Cover

Incastro calpestabile con luce direzionata (1, 2 o 3 uscite luminose). Corpo illuminante a led 1x3W 700mA. Struttura in alluminio anodizzato. Disponibile con led tonalità natural white (4200K). Necessita di alimentatore e contro-cassa art. 60300.001, non inclusi.

Cover_1

Cover_2

Cover_3

10430301.003.05

10430302.003.05

10430303.003.02

1x3W - Led 700mA 4200K

1x3W - Led 700mA 4200K

1x3W - Led 700mA 4200K



Ø 60

Ø 60

Ø 60

10460300.001 box



Ø 40




Ø 40

INGROUND


104C2FL0357
104C2FL0657
104R2CDR0126



Luce a terra
104C2FL0357




Luce a terra
104C2FL0657



Product Code	Light Source	Lens	Lens degree selected by manufacturer (S1/2)	Input voltage (V)	Typical operating current (mA)	Typical consumption (W)	Typical luminance (lm)	R (mm)
C2FL0357	3x2W	CT1	45/35	24VDC 120V/240	24V=240 120V=100 240V=58	24V=5.7 120V=6.3 240V=6.7	Cool white=400 Warm white=285	Ø8
C2FL0657	6x2W	CT1	45/35	24VDC 120V/240	24V=437 120V=100 240V=57	24V=10.5 120V=11.8 240V=12.1	Cool white=875 Warm white=570	Ø8
R2CDR0126	1x6W SHARP COB	R5	25	24VDC 120V/240	24V=270 120V=110 240V=60	24V=6.5 120V=7.6 240V=7.6	Cool white=625 Warm white=529	Ø9



Luce a terra
104R2CDR0126

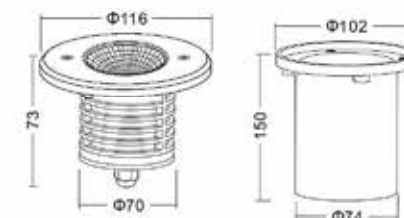


Material Specifications

Housing	Die-casting grey powder coated aluminum T=60-80um
Front Cover	Stainless steel SUS 316L*
Glass	Step tempered glass T=8mm
Cable Gland	IP-67 PG-9 PVC
Gasket	Tooling shaped silicon seal
Driver	Constant current output
Ambient Temperature	-20°C~40°C
Power Cable	H05RN-F
Mounting Sleeve	PVC

INGROUND


Luce a terra
104C2XDR0356



104C2XDR0356
104R21R0125
104R21S0125

Product Code	Light Source	Lens	Beam degree selected by manufacturer (°1/2)	Input voltage (V)	Typical operating current (mA)	Typical consumption (W)	Typical luminance (lm)	IC rate
C2XDR0356	3x1W	C8	45/35	24VDC	150	3.6	Cool white=251 Warm white=199	08
R21R0125	1x5W SHARP COB	R7	30	24VDC 120/240	24V=200 120V=88 240V=50	24V=4.8 120V=5.7 240V=6.2	Cool white=335 Warm white=294	08
R21S0125	1x5W SHARP COB	R7	30	24VDC 120/240	24V=200 120V=88 240V=50	24V=4.8 120V=5.7 240V=6.2	Cool white=335 Warm white=294	08

Luce a terra
104R21R0125 / 104R21S0125

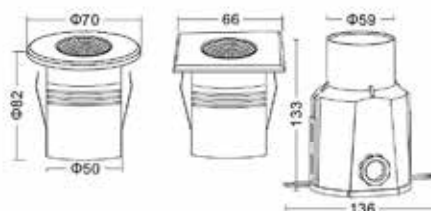

Material Specifications

Housing	Die-casting grey powder coated aluminum T=60-80um
Front Cover	Stainless steel SUS 316L*
Class	Step tempered glass T=8mm
Cable Gland	IP-67 PG-9 PVC
Gasket	Tooling shaped silicon seal
Driver	Constant current output
Ambient Temperature	-20°C~40°C
Power Cable	H05RN-F
Mounting Sleeve	PVC



LAND 50

10440200.011.11
10440201.011.11
10460200.002



Land 50_R

10440200.011.11


1x50W



Land 50_SQ

10440201.011.11

1x50W



11

CE IP67

GU10

LAND 50

Land 50

Incasso tondo carrabile (2000kg a 25km/h) in pressofusione di alluminio, anello in acciaio e diffusore in vetro trasparente. 230V 50W GU10. Necessita di scatola di incasso art. 60200.002 non inclusa.

10460200.002 box



attacco socket	V	IP	m²
1 x GU10	220-240	67/65	0,002

LAND 50 ADJ

10440200.014.11
10440201.014.11
10460200.003



Land 50ADJ_R

Land 50ADJ_SQ

10440200.014.11

1x50W



Ø 140

10440201.014.11

1x50W



140 140

10460200.003 box

Ø 135



150

CE IP67

GU10

11

LAND 50 ADJ

Land 50 ADJ

Incasso carrabile (2000kg a 25km/h) in pressofusione di alluminio, anello in acciaio e diffusore in vetro trasparente. 230V 50W GU10 con ottica orientabile. Necessita di scatola di incasso art. 60200.003 non inclusa.

GES


104GES260
104GES261
104GX537W



GES260



GES261



GES260



GES261

codice code	attacco socket	V	P	⬢ m²
GES260	1 x GX53	220-240	67/65	0,003
GES261	1 x GX53	220-240	67/65	0,003

Classe energetica GX53
Energy class GX53



Lampada GX53

Non dimerabile
3000 K 7W



LAND 11

10440200.019.11
10460200.005



Land 11

10440200.019.11

1x13W - G24d-1



Ø 185

10460200.005 box



CE IP67 ES

G24d-1

LAND 11

Land 11


Incasso fluorescente carrabile
(2000kg a 25km/h) in pressofusione
di alluminio, anello in acciaio e
diffusore in vetro trasparente.
230V 13W G24d-1. Necessita di
scatola di incasso art. 60200.005
non inclusa.



03

WITHOUT

10430316.003.03
10460316.000

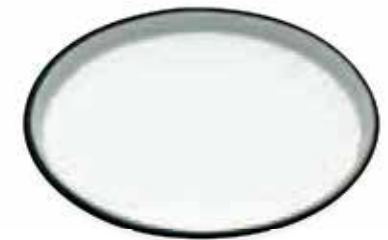

Without_1

10430316.003.03

1x3W - Led 220V 4200K



Ø 97

10460316.000 box



CE IP67 ES

LED

WITHOUT


Without

Incasso carrabile (max 2000kg) a
led 1x3W. Struttura in alluminio
tomito e diffusore in vetro
satinato. Disponibile con led
tonalità natural white (4200K).
Corredato di alimentatore,
necessita di contro-cassa art.
60316.000, non
inclusa.

INGROUND/UNDERWATER


104C2YCR0656
104C4ZB1257

Luce a terra
104C2YCR0656

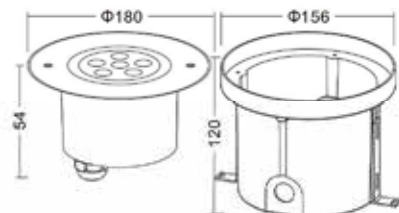

Product Code	Light Source	Lens	Lens degree selected by manufacturer (°/2)	Input voltage (V)	Typical operating current (mA)	Typical consumption (W)	Typical luminance (lm)	IK rate
C2YCR0656	6x1W	CR	45/35	24VDC	300	7.2	Cool white=483 Warm white=433	08
C4ZB1257	12x2W	CR	45/35	24VDC	1200	28.8	Cool white=1395 Warm white=1181	08

Luce subacquea
104C4ZB1257

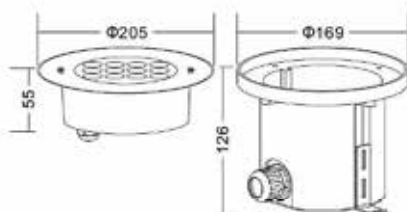

Material Specifications

Housing	Die-casting grey powder coated aluminum T=60-80um
Front Cover	Stainless steel SUS 316L*
Class	Step tempered glass T=8mm
Cable Gland	IP-67 / IP-68 PG-9 PVC
Gasket	Tooling shaped silicon seal
Driver	Constant current output
Ambient Temperature	-20°C~40°C
Power Cable	H05RN-F
Mounting Sleeve	PVC

CHAOS

104B3AB0102
104B3AM0102



3AB1



3AM1



LED

IP65

Chaos_3AB1



104B3AB0102



3.5W - 24V - 210Lm - 30°
LED Epistar
Ø.42 x (75+240)

Chaos_3AM1



104B3AM0102



3.5W - 24V - 210Lm - 30°
LED Epistar
Ø.42 x (75+85)
Ø.60 button

CHAOS

Chaos_3A

Spot da giardino. Finitura in alluminio anodizzato e verniciatura in polvere nei colori nero e grigio argento. Luce fredda, calda e RGB.

Garden spot. Aluminium anodized finishing and powder coating in black or silver gray. Cool white, warm white, RGB.

Options:

_Input: 12V - 120V - 240V

_Beam angle: 15° - 45° - 60°

OUTDOOR



104SDE007
104SDE003K

Model No.:	SDE-007
Power Consumption	15W/20W
Operational Voltage	AC85V-265V
Color Temperature	2700K-5000K
CRI	Min>80
Intensity of Light Output	1000lm-2100lm
Beam Angle Range	26° X 60° 36° X 70° 50° X 80°
Rating	IP 65
Expected Life	50,000 hours



SDE-007 (20W,3000K,50deg) --- C90-C270
SDE-007 (20W,3000K,80deg) --- C0-C180

Model No.:	SDE-003K
Power Consumption	60W/90W
Operational Voltage	AC85V-265V
Color Temperature	2700K-5000K
CRI	Min>80
Intensity of Light Output	4200lm-9100lm
Beam Angle Range	26° - 60°
Rating	IP 65
Expected Life	50,000 hours



Turn Angle from 26° - 60°



OUTDOOR

104SPIKEDZ
104SPIKEPICCHETTO



Dati tecnici

Dimensioni: $\varnothing 90 \times 166 \times 139$

Potenza: 8W

Alimentazione: 220-240V

Led: 8W COB LED

LED Chip: CREE COB Chip

Ra>80

IP65

Beam Angle: >60°

WALL WASHER B6R

104B6R



Body thickness only 28mm

Plug/socket connector (option)

WALL WASHER A6P

104A6P0906
104A6P1837



The device of air valve, to draw the vapor from the fixture.

Plug/socket connector (option)

Wall washer_B6R1



Wall washer_B6R2



IP65

WALL WASHER


Wall washer_B6R

Alluminio estruso, verniciato a polvere. Luce fredda, calda.

Extruded aluminium, powder coated. Cool white, warm white.



Wiring diagram

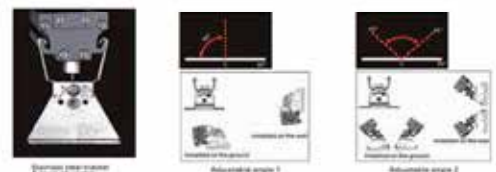

Wall washer_A6P



Wall washer_A6P



IP65

WALL WASHER

Wall washer_A6P

Alluminio estruso, verniciato a polvere. Luce fredda, calda e RGB.

Extruded aluminium, powder coated. Cool white, warm white, RGB.





GES

104GES17



104Ges170LF (luce
104Ges170LC (luce calda)
104Ges171LF (luce
104Ges171LC (luce calda)
104Ges172LF (luce
104Ges172LC (luce calda)
104Ges173LF (luce
104Ges173LC (luce calda)

2xGx53 - 6,5W - 240V
m³ 0,002



GLA078
GLA078C
Gx53
6,5W - 240V



IP44

GES

Ges17

Struttura in alluminio. Finitura in antracite, alluminio, corten o bianco. Diffusore in vetro trasparente. Lampadine incluse.



GES

104GES02



Ges020

104GES020
luce fredda
104GES020C
luce calda

1xE27 - 20W - 250V

m³ 0,004




GLA021
GLA021C
E27
20W - 250V

Ges021

104GES021
luce fredda
104GES021C
luce calda

1xE27 - 20W - 250V

m³ 0,005




Ges022

104GES022
luce fredda
104GES022C
luce calda

1xE27 - 20W - 250V

m³ 0,017



IP44

GES

Ges02

Struttura in alluminio. Colore antracite, bianco, corten e silver. Diffusore in vetro satinato, finitura lucida. Lampadine incluse.

GES

104GES23



104Ges231 (luce fredda)

104Ges231C (luce calda)

1xE27 - 20W - 250V
m³ 0,031

104Ges231A (luce fredda)


104Ges231AC (luce calda)

1xE27 - 20W - 250V

104Ges230 (luce fredda)

104Ges230C (luce calda)

1xE27 - 20W - 250V
m³ 0,008

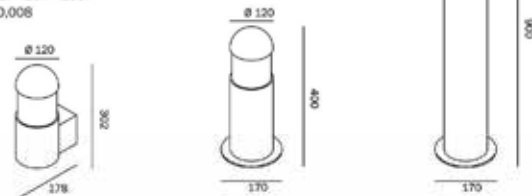

IP44

GES

Ges23


Montatura in alluminio. Finitura antracite, bianco, corten, silver. Diffusore in metacrilato trasparente. Lampadine incluse.



GLA021
GLA021C
E27
20W - 250V

TREDIEGO

104GES.TREDIEGO

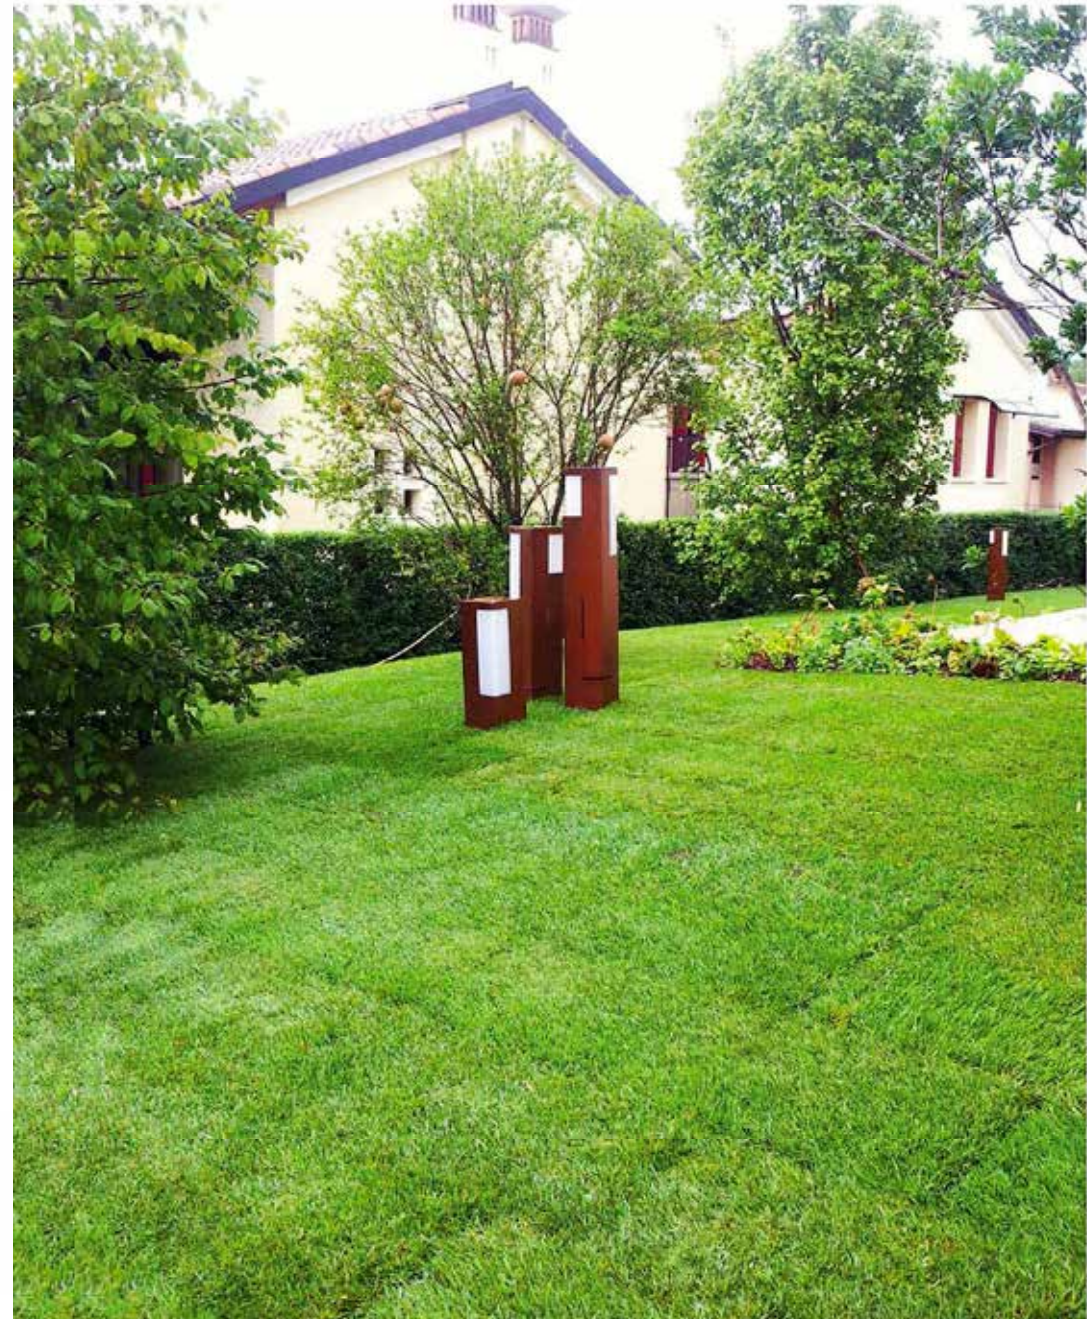


HIP65 10W

1041020-BK
1041020-S

Colori disponibili: **B** **S**



DATI TECNICI

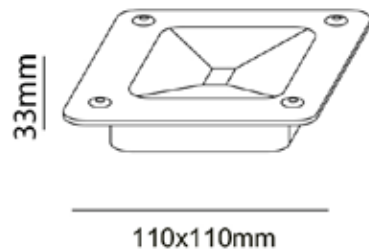

AC
200V
240V

Hz
50/60



IP
65

CRI(Ra)
>80

25.000h



RoHS
COMPLIANT

ON/OFF
x15.000



10W


lm
800

PF
>0.90

120°



Industria e Stradale

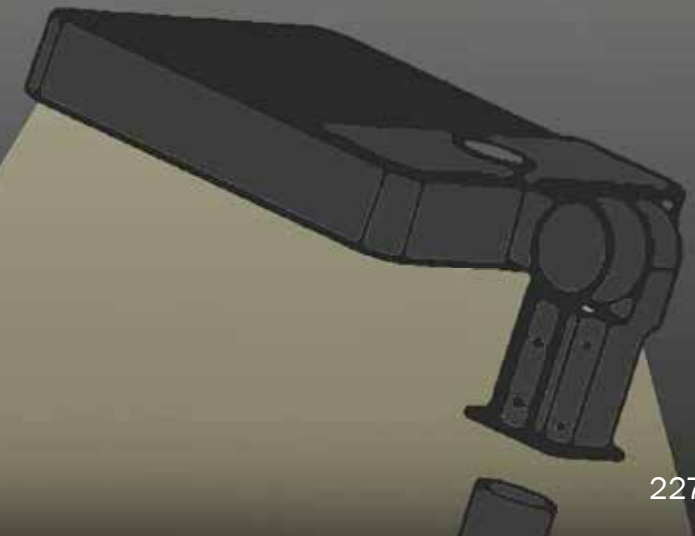

SOLAR STREET LIGHT

DK-ST-SA Series

ALL-IN-ONE SOLAR STREET LIGHT

Intelligent and Energy Saving

-- The solar panel converts sunlight into electricity and charges the Li-Fe battery via controller; the LED light will work in night automatically by light sensor control, and provide light for the darkness area, and the solar intelligent induction system can save the energy when the lighting is not necessary.





SOLAR STREET LIGHT

114DKSTSA

114DKSTSA05

Solar Panel: 18V 10W
Light Power: 12V 5W
Battery: Built-in 12.8V 4AH
Lumen: 500-550Lm
Color Temperature: 2700-6500K
Working Temperature: -20°C ~ 60°C
Mounting Height: 2.5-3.5M

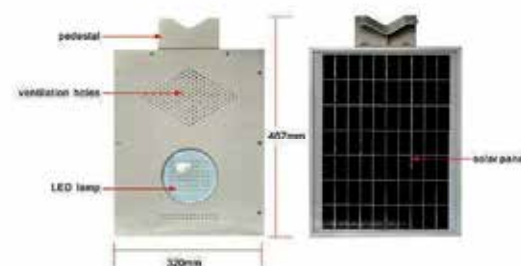
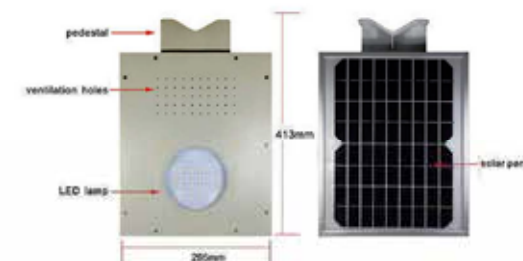


114DKSTSA08

Solar Panel: 18V 15W
Light Power: 12V 8W
Battery: Built-in 12.8V 6AH
Lumen: 800-880Lm
Color Temperature: 2700-6500K
Working Temperature: -20°C ~ 60°C
Mounting Height: 3-4M

114DKSTSA12

Solar Panel: 18V 18W
Light Power: 12V 12W
Battery: Built-in 12.8V 6AH
Lumen: 1200-1320Lm
Color Temperature: 2700-6500K
Working Temperature: -20°C ~ 60°C
Mounting Height: 3-4M

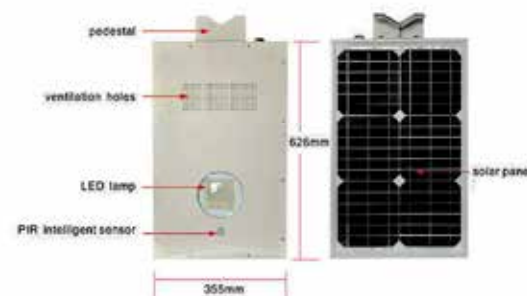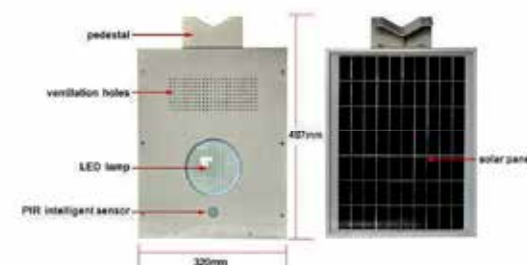

114DKSTSA15

Solar Panel: 18V 30W
Light Power: 12V 15W
Battery: Built-in 12.8V 12AH
Lumen: 1500-1650Lm
Color Temperature: 2700-6500K
Working Temperature: -20°C ~ 60°C
Mounting Height: 4-5M


SOLAR STREET LIGHT

DK-ST-SC Series

ALL-IN-ONE SOLAR STREET LIGHT

Smart Control and Powerful Light

- Adjustable Solar Panel
- Wireless Application
- Micro-Computer Controlled
- Easy Installation
- Extremely Light
- Lithium Battery
- Modular Design
- Low Cost and Easy to Transport

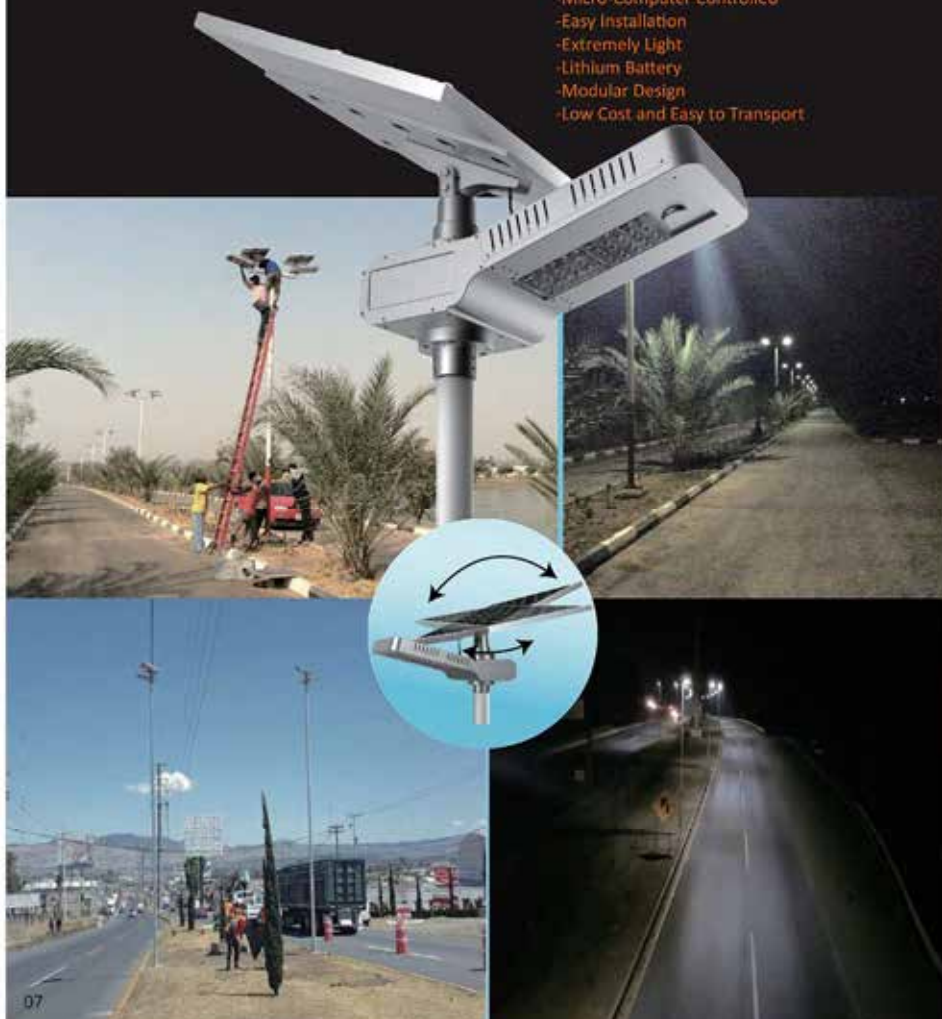

SOLAR STREET LIGHT

114DKSTSC

114DKSTSC04

Solar Panel: 18V 50W
Light Power: 12V 15W
Battery: Built-in 12.8V 170WH
Lumen: 2500-2800Lm
Color Temperature: 2700-6500K
Working Temperature: -20°C ~ 60°C
Mounting Height: 5-6M




114DKSTSC01

Solar Panel: 18V 65W
Light Power: 12V 20W
Battery: Built-in 12.8V 212WH
Lumen: 2500-2800Lm
Color Temperature: 2700-6500K
Working Temperature: -20°C ~ 60°C
Mounting Height: 5-6M



114DKSTSC02

Solar Panel: 18V 80W
Light Power: 12V 30W
Battery: Built-in 12.8V 340WH
Lumen: 3600-4200Lm
Color Temperature: 2700-6500K
Working Temperature: -20°C ~ 60°C
Mounting Height: 6-7M



114DKSTSC03

Solar Panel: 18V 100W
Light Power: 12V 40W
Battery: Built-in 12.8V 424WH
Lumen: 5000-5600Lm
Color Temperature: 2700-6500K
Working Temperature: -20°C ~ 60°C
Mounting Height: 8-10M

Easy Installation in 5minutes!





I. Application

Parking lot light, Wall lighting area, Street lighting, Passageway lighting, Industrial Lighting

II. Product Features



1. MD lens: a suitable lighting distribution for parking lot.
2. Radiator: hollowed-out type for a better heat dissipation
3. Installation angle: $-90^{\circ} \sim +90^{\circ}$ with various connectors.
4. Chip: Samsung LH351B
5. Lighting effect: 100LM/W

III. Installation Notes

1. Before installation, please make sure the power is cut off and the lamps and lanterns can be held perfectly.
2. To prevent the light from falling off, please follow the corrected installation steps.
3. Please do not use it where there is corrosive gas.
4. Please do not cover any material on the lamp.
5. For the sake of safety, please make sure the earth wire is connected correctly.
6. Any fault caused by decomposition, modification, or improper use is beyond the scope of warranty.

V. Instruction of Installation and Wiring

1. Connector A (Light pole diameter 60MM)



Adapter can be rotated

114PARK

Model No.	Picture	Power	Input Voltage	Driver	LED chip	CTT	Lumen
114PARK48		48W	100-277VAC	HG-50W-A19C-C1400	Samsung 3535	3000K, 4000K, 5000K, 6000K	4000Lm
114PARK60		60W	100-277VAC	Meanwell LPF-60-36	Samsung 3535	3000K, 4000K, 5000K, 6000K	5400Lm
114PARK80		80W	100-277VAC	Meanwell CEN-100-36	Samsung 3535	3000K, 4000K, 5000K, 6000K	7200lm
114PARK100		100W	100-277VAC	Meanwell CEN-100-36	Samsung 3535	3000K, 4000K, 5000K, 6000K	9000lm
114PARK120		120W	100-277VAC	Meanwell CLG-150-36A	Samsung 3535	3000K, 4000K, 5000K, 6000K	10800lm
114PARK150		150W	100-277VAC	Meanwell CLG-150-36A	Samsung 3535	3000K, 4000K, 5000K, 6000K	13500lm
114PARK200		200W	100-277VAC	Meanwell HLG-240H-36A	Samsung 3535	3000K, 4000K, 5000K, 6000K	18000lm
114PARK240		240W	100-277VAC	Meanwell HLG-240H-36A	Samsung 3535	3000K, 4000K, 5000K, 6000K	22000lm
114PARK300		300W	100-277VAC	Meanwell HLG-320H-42A	Samsung 3535	3000K, 4000K, 5000K, 6000K	27000lm

Connettori a pag. 239 (connettore incluso)

Features

- Die-casting aluminum Housing.
- Efficient aluminum reflector.
- Tempered glass lens.
- Waterproof, dustproof, standard by IP65.
- Up to 100lm/w.
- Power factor greater than 0.95.
- 1-10V dimmable can be offered.
- FCC47CFR Part15 Class B Compliant

Application

- Building Accent Lighting
- Landscape Lighting
- Passageway Lighting
- Parking Lot Lighting
- Area Lighting
- Storage Area Lighting

Certificate

- UL/cUL(E467356), CE, RoHS

Warranty

- 5 Years warranty

Specifications

	114WP40W	114WP60W	114WP80W
Model No.:	WP-40A	WP-60A	WP-80A
Power Consumption:	40W	60W	80W
Input Voltage:	100-277Vac	100-277Vac	100-277Vac
Operate Frequency:	50-60Hz	50-60Hz	50-60Hz
Lumens Output:	3600lm	5400lm	7200lm
LED Brand:	SAMSUNG		
Color Temperature:	3000K / 4000K / 5000 / 6000K		
CRI:	Raz75		
Beam Angle:	60°		
IP Rated:	IP65		
Power Factor:	>0.95		
Total Harmonic Distortion:	<20%		
Working Temp.:	-20°C ~ 40°C		
Storage Temp.:	-40°C ~ 70°C		
Lifespan L70(H):	>50,000 Hours		
Cables:	0.3m three-core high quality silicon wire		
Fixture Weight:	3.9Kg(8.6lb)	3.9Kg(8.6lb)	4.15Kg(9.2lb)

Note1: Different Color LED light performance somewhat deviation, rates 5%

Ordering Information


Sample: WP-40A-277V-50K

Product	Input Voltage	CCT	Housing color	Operation
WP-40A 40W	277V 100-277Vac	30K 3000 kelvin	Blank	Blank
WP-60A 60W	347V 220-480Vac	40K 4000 Kelvin	Brown (Standard)	Non-dimming (Standard)
WP-80A 80W		50K 5000 Kelvin		ADIM
		60K 6000 Kelvin		1-10V Dimming


114WP




Unit: mm




Light Distribution Curve



40W




60W




80W


Illumination Distribution



40W



60W



80W

Packing information

Item	Q'ty/CTN	Net W.	Gross W.	CTN Size
WP-40A-277V	1	5kg	5.5kg	330x350x300mm
WP-60A-277V	1	5kg	5.5kg	330x350x300mm
WP-80A-277V	1	5kg	5.5kg	330x350x300mm






Warranty Policy

- Standard 5 years after purchase under normal usage
- Will provide free/rework new products based on the proof-documents
 - (1). If driver failed, we'll send new driver
 - (2). If LED failed, we'll send new LED
 - (3). Unclear reason, we will sent full new set

INDUSTRY

114XLHB3G100W
114XLHB3G150W
114XLHB3G200W

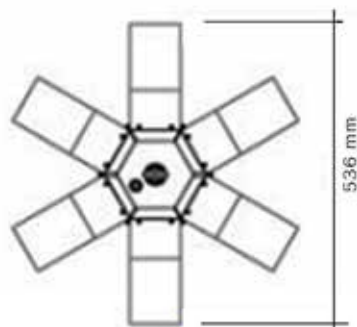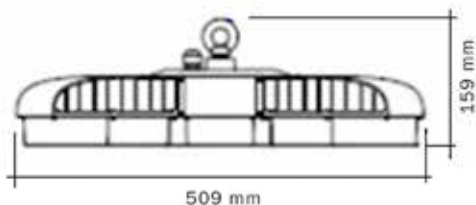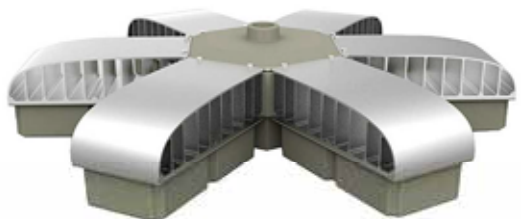

	XL-HB3G-100W			
	Power:	100W	Power Factor(PF):	> 0.9
	Input Voltage:	AC100~240V/ frequency (50~60Hz)	Beam Angle:	30°,60°,90°
			Color Rendering Index:	Ra>70
	Input Current:	<1A	Color Temperature:	5500K-6000K
	Luminous Efficiency:	≥75lm/W	IP Rating :	IP65
	Initial luminous Flux:	≥7500lm	Net Weight(kg):	4,2
			(MOQ pcs):	50
	XL-HB3G-150W			
	Power:	150W	Power Factor(PF):	>0.95
	Input Voltage:	AC100~240V/ frequency (50~60Hz)	Beam Angle:	30°,60°,90°
			Color Rendering Index:	Ra>70
	Input Current:	<2A	Color Temperature:	5500K-6000K
	Luminous Efficiency:	≥75lm/W	IP Rating :	IP65
	Initial luminous Flux:	≥11000lm	Net Weight(kg):	4,8
			(MOQ pcs):	50
	XL-HB3G-200W			
	Power:	200W	Power Factor(PF):	>0.95
	Input Voltage:	AC100~240V/ frequency (50~60Hz)	Beam Angle:	30°,60°,90°
			Color Rendering Index:	Ra>70
	Input Current:	<3A	Color Temperature:	5500K-6000K
	Luminous Efficiency:	≥75lm/W	IP Rating :	IP65
	Initial luminous Flux:	≥15000lm	Net Weight(kg):	6
			(MOQ pcs):	50

CONDIZIONI GENERALI DI VENDITA ITALIA

Le forniture comprendono solo quanto espressamente specificato tramite ordinazione scritta alla ditta venditrice. Eventuali inoltri telefonici non hanno valore impegnativo se non confermati con lettera d'ordine.

La merce, anche se venduta franco destino viaggia a rischio e pericolo del committente, compresi eventuali danni anche parziali.

La spedizione in porto franco viene concessa per importi superiori a Euro 500,00 netto, altresì verrà applicato il porto assegnato con addebito in fattura in relazione alle tariffe di trasporto vigenti.

A richiesta del cliente l'inoltro della merce potrà avvenire tramite il proprio corriere fiduciario, a sue spese.

Si raccomanda al Cliente di controllare la merce in presenza del vettore ed eventualmente annotare sul DDT eventuali rature riscontrate. Le stesse dovranno essere comunicate entro 5gg. a **STUDIO4M** a mezzo Raccomandata A.R.

Saranno accettati resi per accreditato solo se concordato preventivamente, entro 30gg. dalla data di acquisto. Questi saranno accettati solo se in buono stato di conservazione ed in esecuzione catalogo. In ogni caso sarà addebitato il valore della merce del 15%, come contributo alle spese di controllo ed imballaggio.

I termini di consegna convenuti hanno valore indicativo, non tassativo e comunque non contestabile.

Gli acquirenti sono responsabili per la scelta degli articoli in relazione alle loro caratteristiche ed all'uso cui sono destinati. Si declina pertanto ogni vizio dovuto a montaggio, utilizzo inadeguato e/o manomissione anche parziale degli articoli.

Le caratteristiche tecniche ed estetiche degli articoli riportati nel catalogo potranno subire variazioni senza preavviso né obbligo di comunicazione, secondo le esigenze di fabbricazione.

Per eventuali divergenze, unico competente viene riconosciuto il Foro di Treviso.

GAMMA COLORI 1/3

RAL 1001 beige beige beige	RAL 1013 perlweis oyster white blanc perlé	RAL 1015 hellelfenbein light ivory ivoire clair	RAL 1018 zinkgelb zinc yellow jaune zinc	RAL 1019 graubeige grey beige beige gris
RAL 1021 rapsgelb rape yellow jaune colza	RAL 1023 verkehrsgelb traffic yellow jaune signalisation	RAL 2003 pastellorange pastel orange orangé pastel	RAL 2004 reindorange pure orange orangé rouge	RAL 2010 signalorange signal orange orangé de sécurité
RAL 3000	RAL 3001 signalrot signal red rouge de sécurité	RAL 3003 Ruby Red	RAL 3005 Wine Red	RAL 3014 altrosa antique pink vieux rose
RAL 3015 hellrosa light pink rose clair	RAL 3018 erdbeerrot strawberry red rouge fraise	RAL 3020 verkehrszot traffic red rouge signalisation	RAL 4005 blaulila blue lilac lilas bleu	RAL 4006 verkehrspurpur traffic purple rouge signalisation
RAL 4010 telemagenta telemagenta telemagenta	RAL 5000 violettblau violet blue bleu violet	RAL 5002 ultramarinblau ultramarine blue bleu outremer	RAL 5005 signalblau signal blue bleu de sécurité	RAL 5008 graublau gray blue bleu gris
RAL 5010 enzianblau gentian blue bleu gentiane	RAL 5011 stahlblau steel blue bleu acier	RAL 5012 lichtblau light blue bleu clair	RAL 5013 kobaltblau cobalt blue bleu cobalt	RAL 5014 taubenblau pigeon blue bleu pigeon
RAL 5015 himmelblau sky blue bleu ciel	RAL 5017 verkehrsblau traffic blue bleu signalisation	RAL 5018 türkisblau turquoise blue bleu turquoise	RAL 5024 pastellblau pastel blue bleu pastel	RAL 6011 resedagrün reseda green vert réséda

GAMMA COLORI 2/3

RAL 6018 gelbgrün yellow green vert jaune	RAL 6024 verkehrsgrün traffic green vert signalisation	RAL 6027 lichtgrün light green vert clair	RAL 6029 minzgrün mint green vert menthe	RAL 6032 signalgrün signal green vert de sécurité
RAL 6033 minttürkis mint turquoise turquoise menthe	RAL 7001 silbergrau silver grey gris argent	RAL 7003 moosgrau moss grey gris mousse	RAL 7004 signalgrau signal grey gris de sécurité	RAL 7005 mausgrau mouse grey gris souris
RAL 7006 beigegrü beige grey gris beige	RAL 7012 basaltgrau basalt grey gris basalte	RAL 7013 braungrau brown grey gris brun	RAL 7021 schwarzgrau black grey gris noir	RAL 7024 graphitgrau graphite grey gris graphite
RAL 7030 steingrau stone grey gris pierre	RAL 7031 blaugrau blue grey gris bleu	RAL 7032 kieselgrau pebble grey gris silex	RAL 7035 lichtgrau light grey gris clair	RAL 7036 platingrau platinum grey gris platine
RAL 7037 staubgrau dusty grey gris poussière	RAL 7038 achatgrau agate grey gris agate	RAL 7039 quarzgrau quartz grey gris quartz	RAL 7040 fenstergrau window grey gris fenêtre	RAL 7042 verkehrsgrau A traffic grey A gris signalisation A
RAL 7043 verkehrsgrau B traffic grey B gris signalisation B	RAL 7044 seidengrau silk grey gris soie	RAL 7045 telegrau 1 telegrey 1 telegris 1	RAL 7047 telegrau 4 telegrey 4 telegris 4	RAL 8011 russbraun nut brown brun noisette
RAL 8016 mahagonibraun mahogany brown brun acajou	RAL 8019 graubraun grey brown brun gris	RAL 8023 orangebraun orange brown brun orangé	RAL 8025 blassbraun pale brown brun pâle	RAL 9001 cremeweiss cream blanc crème

NOTE

[illegible]

NOTE

[illegible]

[illegible]



STUDIO4M di Dal Col Mauro

**Via Sernaglia, 32
31020 Falzè di Piave (Treviso) Italy**

Tel./fax +39 0438903313 Mobile +39 3479116273

**www.led4led.com
info@led4led.com**

Led4Led
Follow us on:

